

# Glam






MINIMALISM AND TECHNOLOGY





BODY



LED



FIXING SYSTEM



14° LENS



47° LENS



OVAL LENS




DECORATIVE TRIM





RANGE INTRODUCTION

GLAM

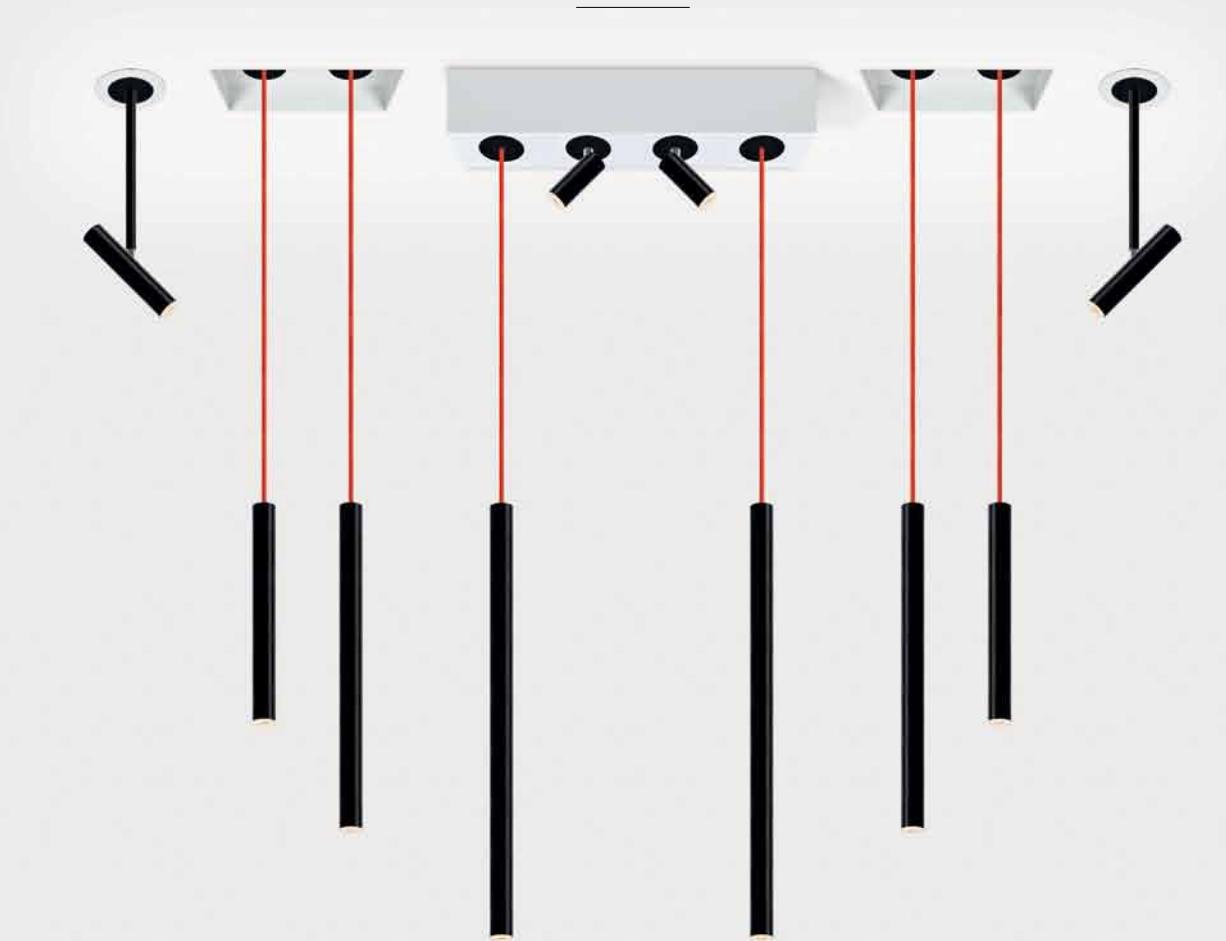

GLAM / WE




GLAM / W






GLAM S

---

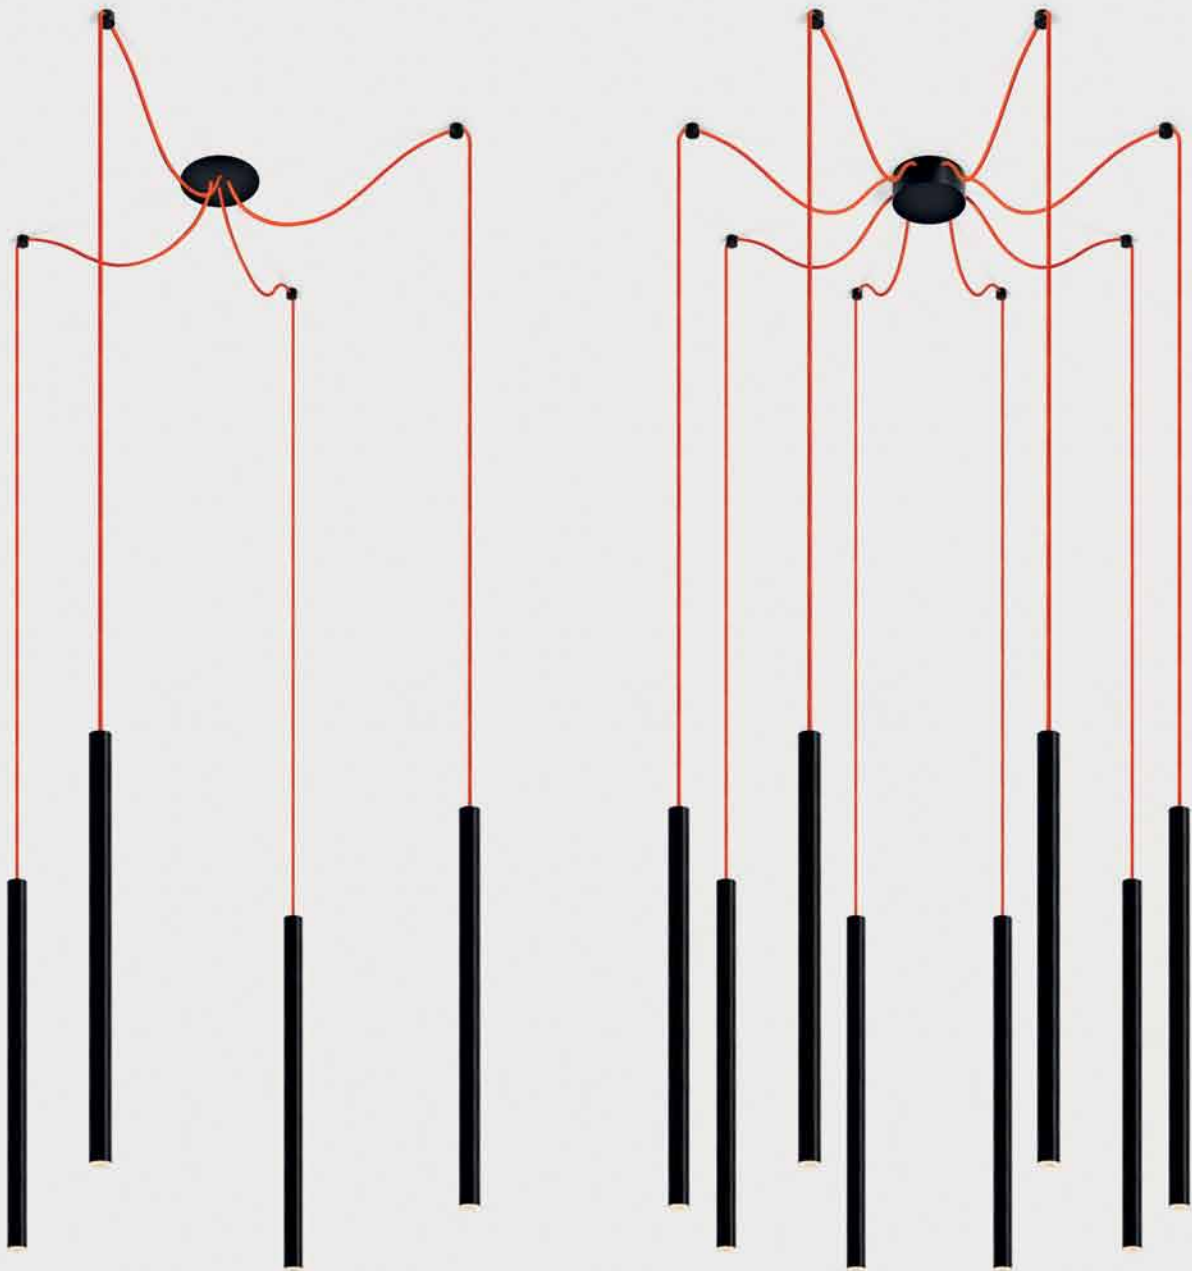



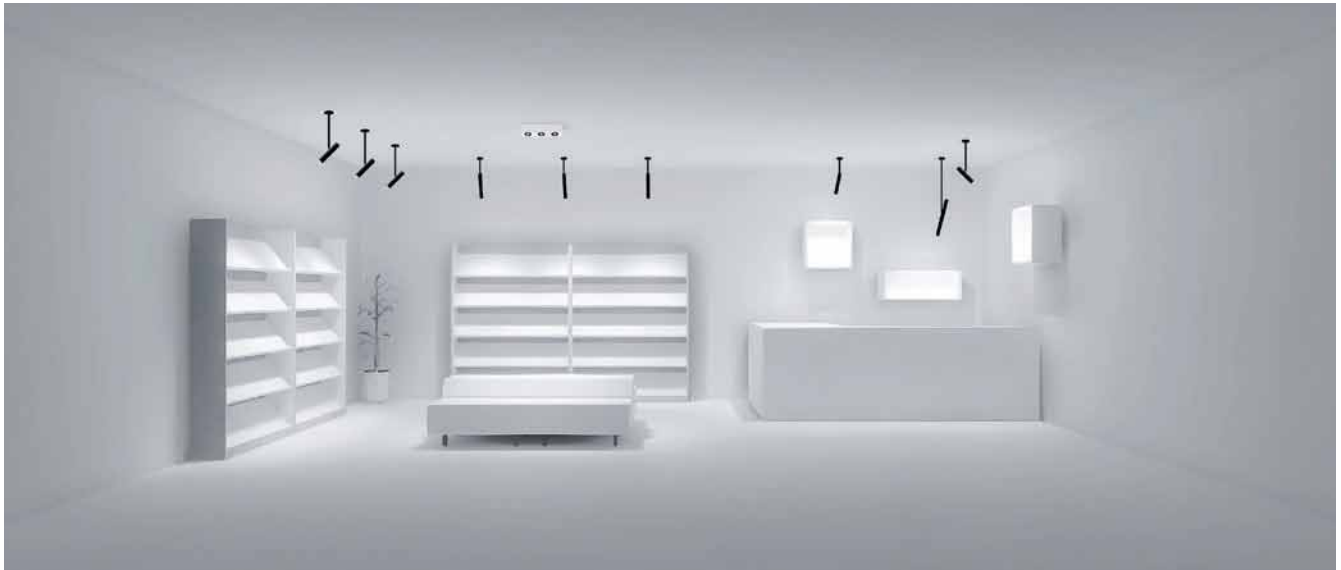









**3 SIMPLE STEPS TO  
CHOOSE YOUR PRODUCT**

**1**

CHOOSE MOUNTING  
HOUSING

---



**2**

CHOOSE  
INSETS

---



**3**

CHOOSE OPTICAL  
SYSTEM

---





	Individual		Individual or Continuous Line		
Trimless					
Recessed					
Surface					





## INSETS



BLANK COVER  
INSET

SUSPENDED  
INSETS






RECESSED  
INSETS

SPOTLIGHT  
INSETS



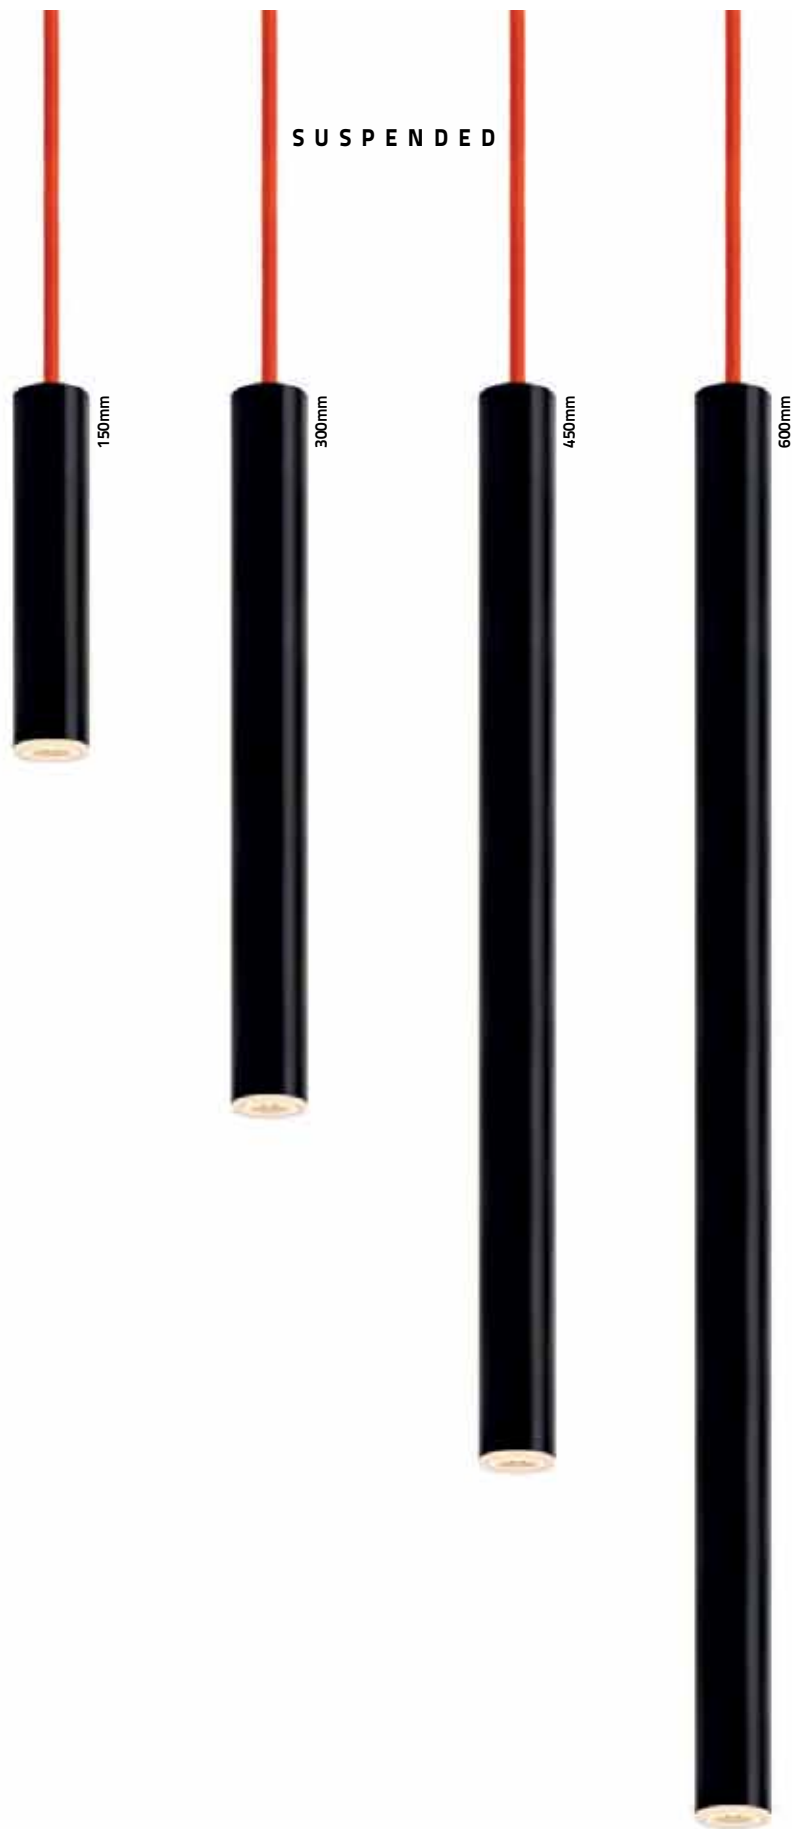



SPOTLIGHT






CONTINUOUS LINE



ADJUSTABLE  
90° + 355°






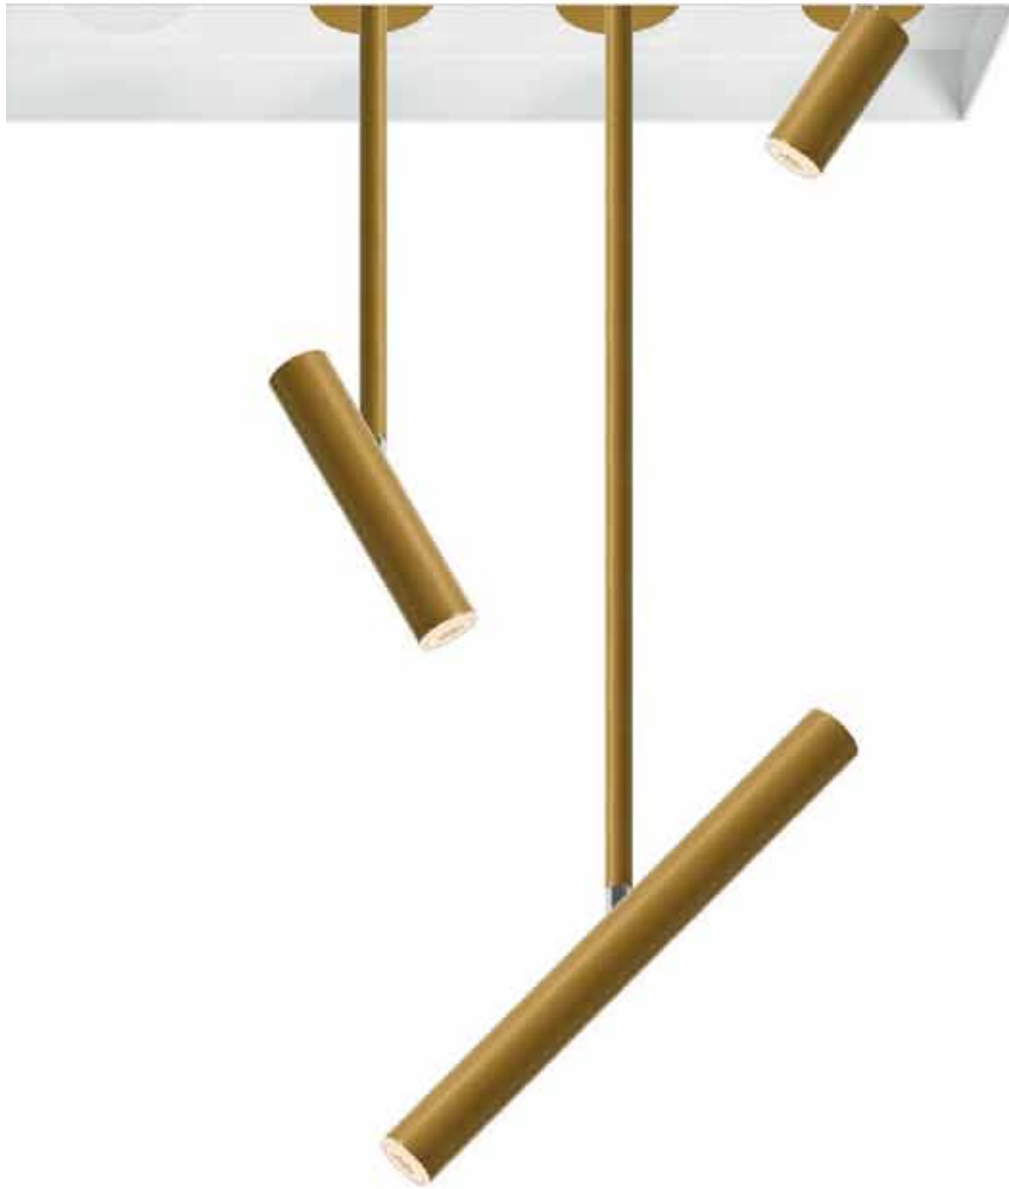





OPTICAL SYSTEM

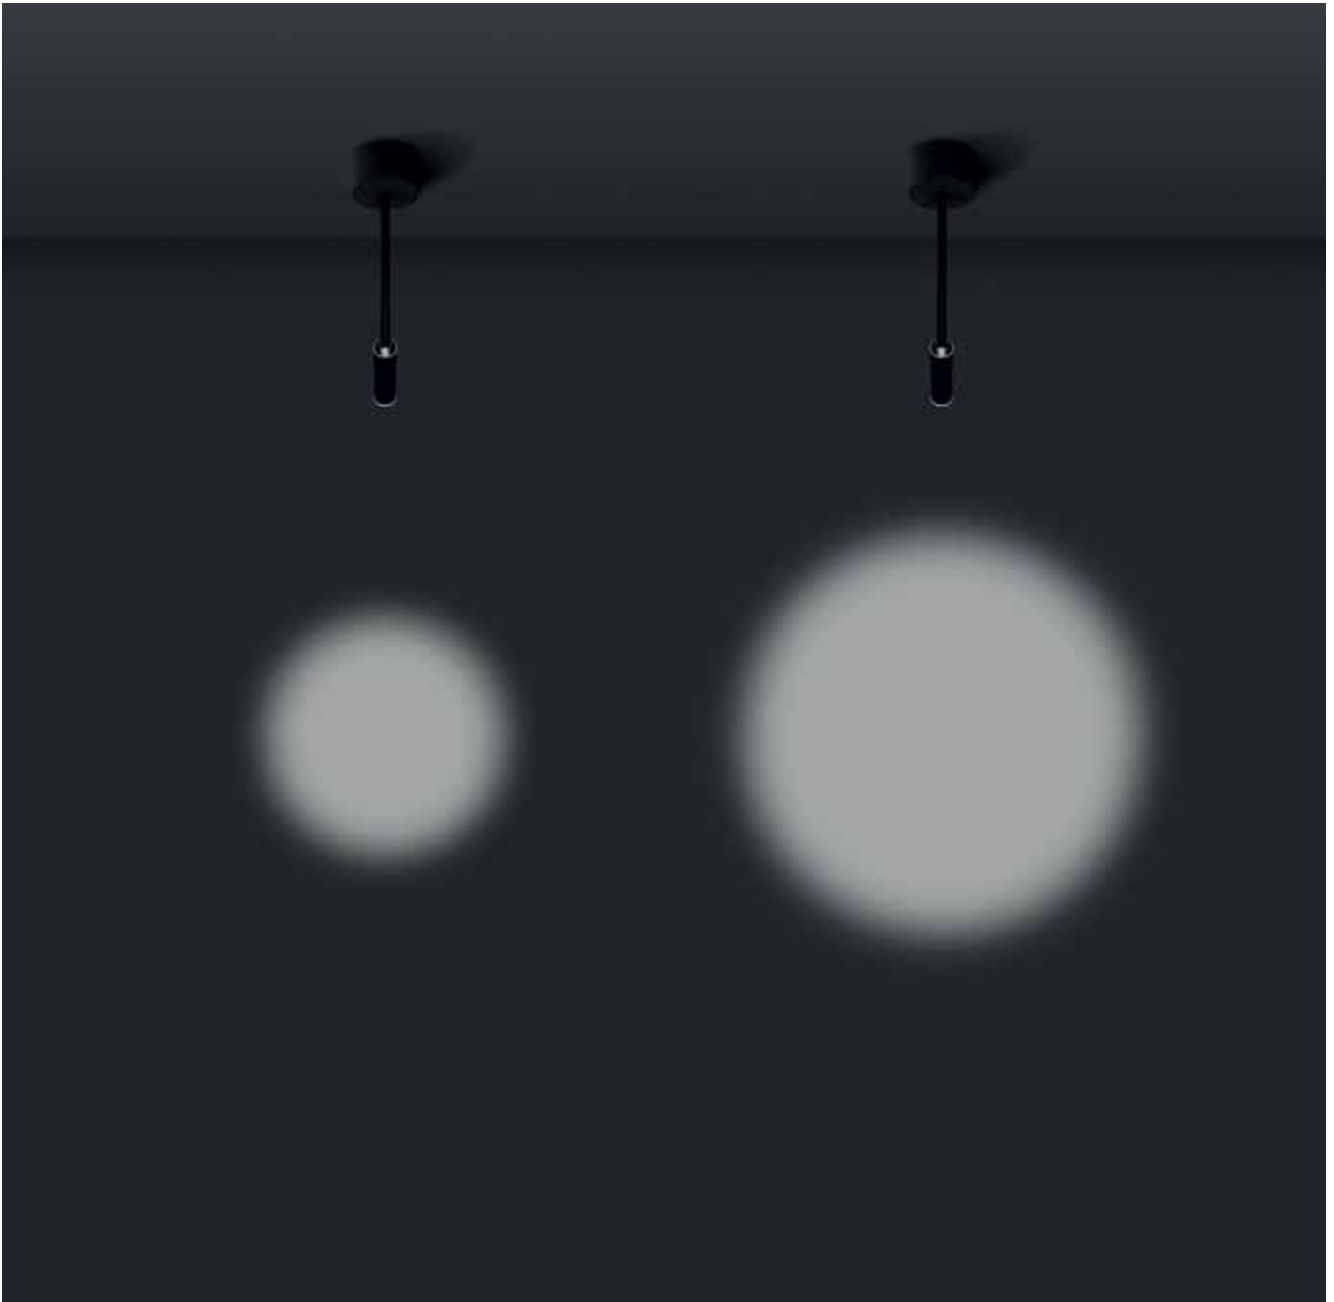


14°




47°



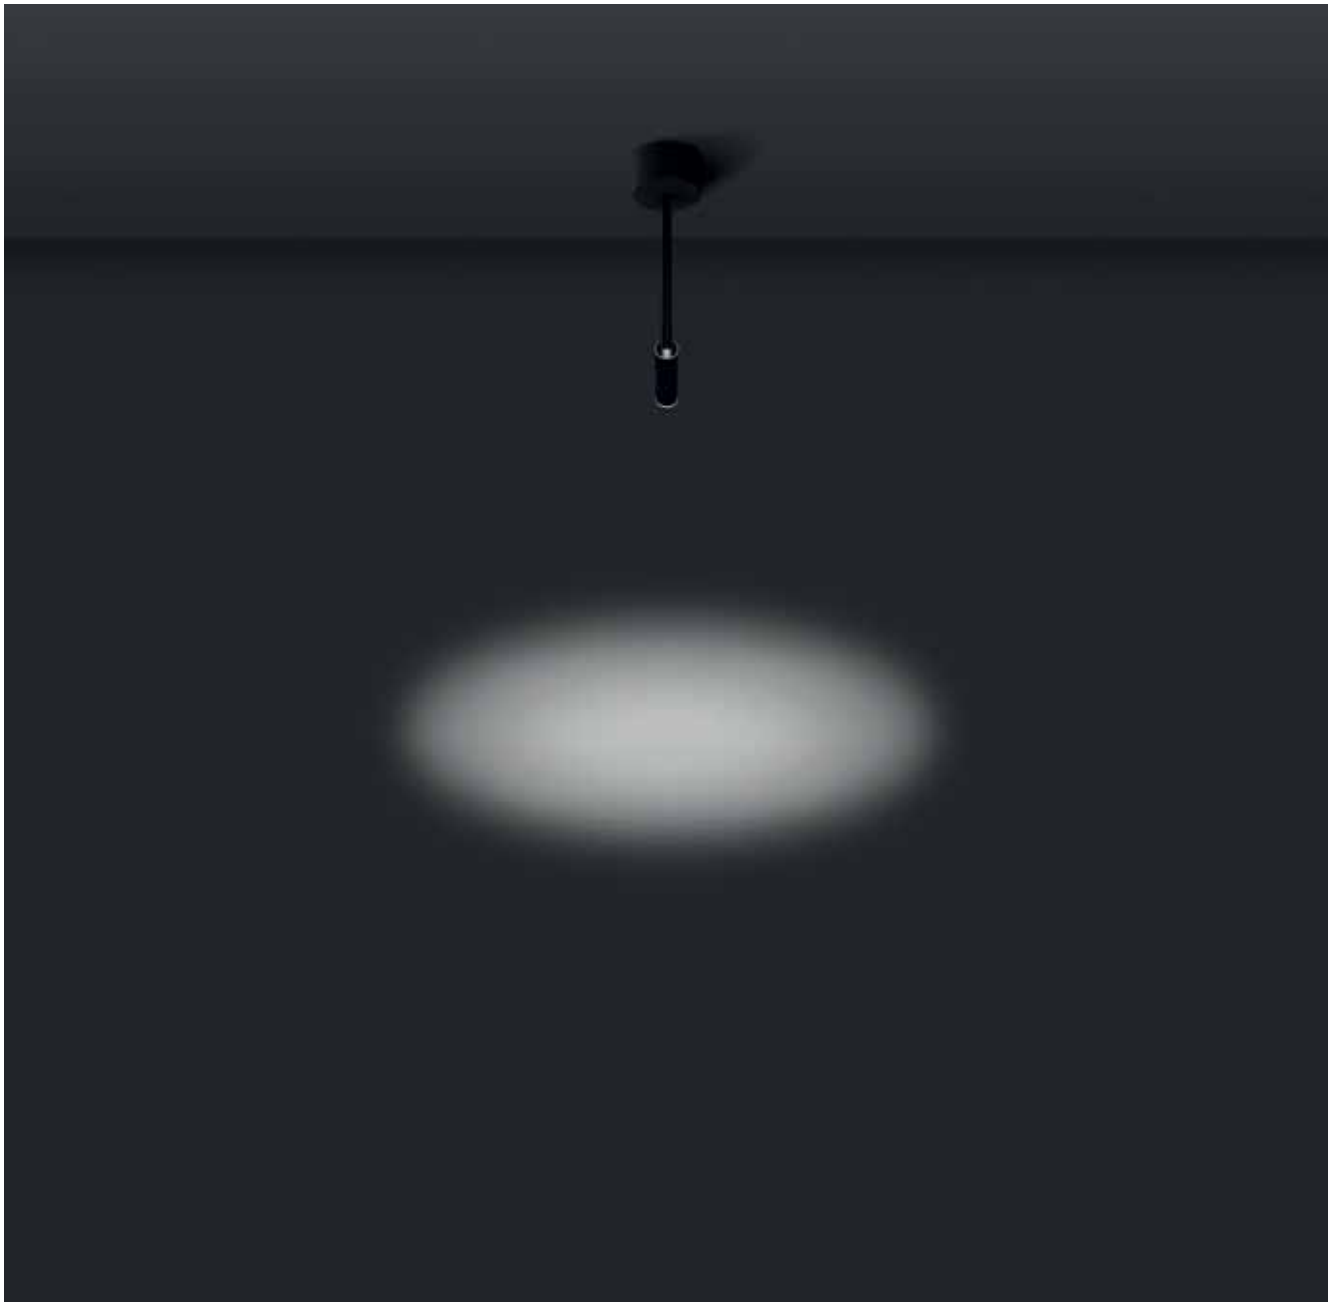

OVAL FLOOD

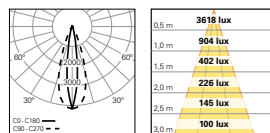



CLIP-IN SYSTEM








WALL  
RECESSED







WALL  
SURFACE

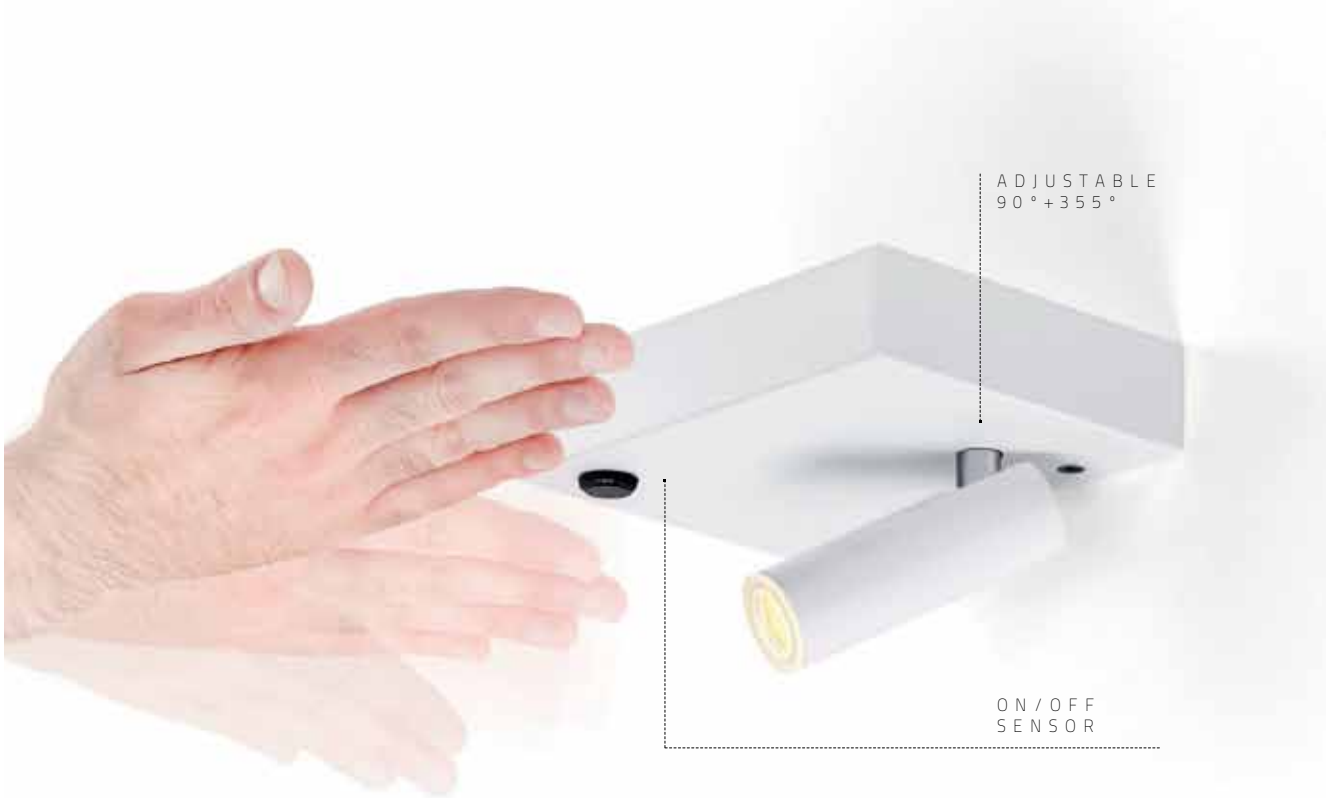



USB  
CONNECTION










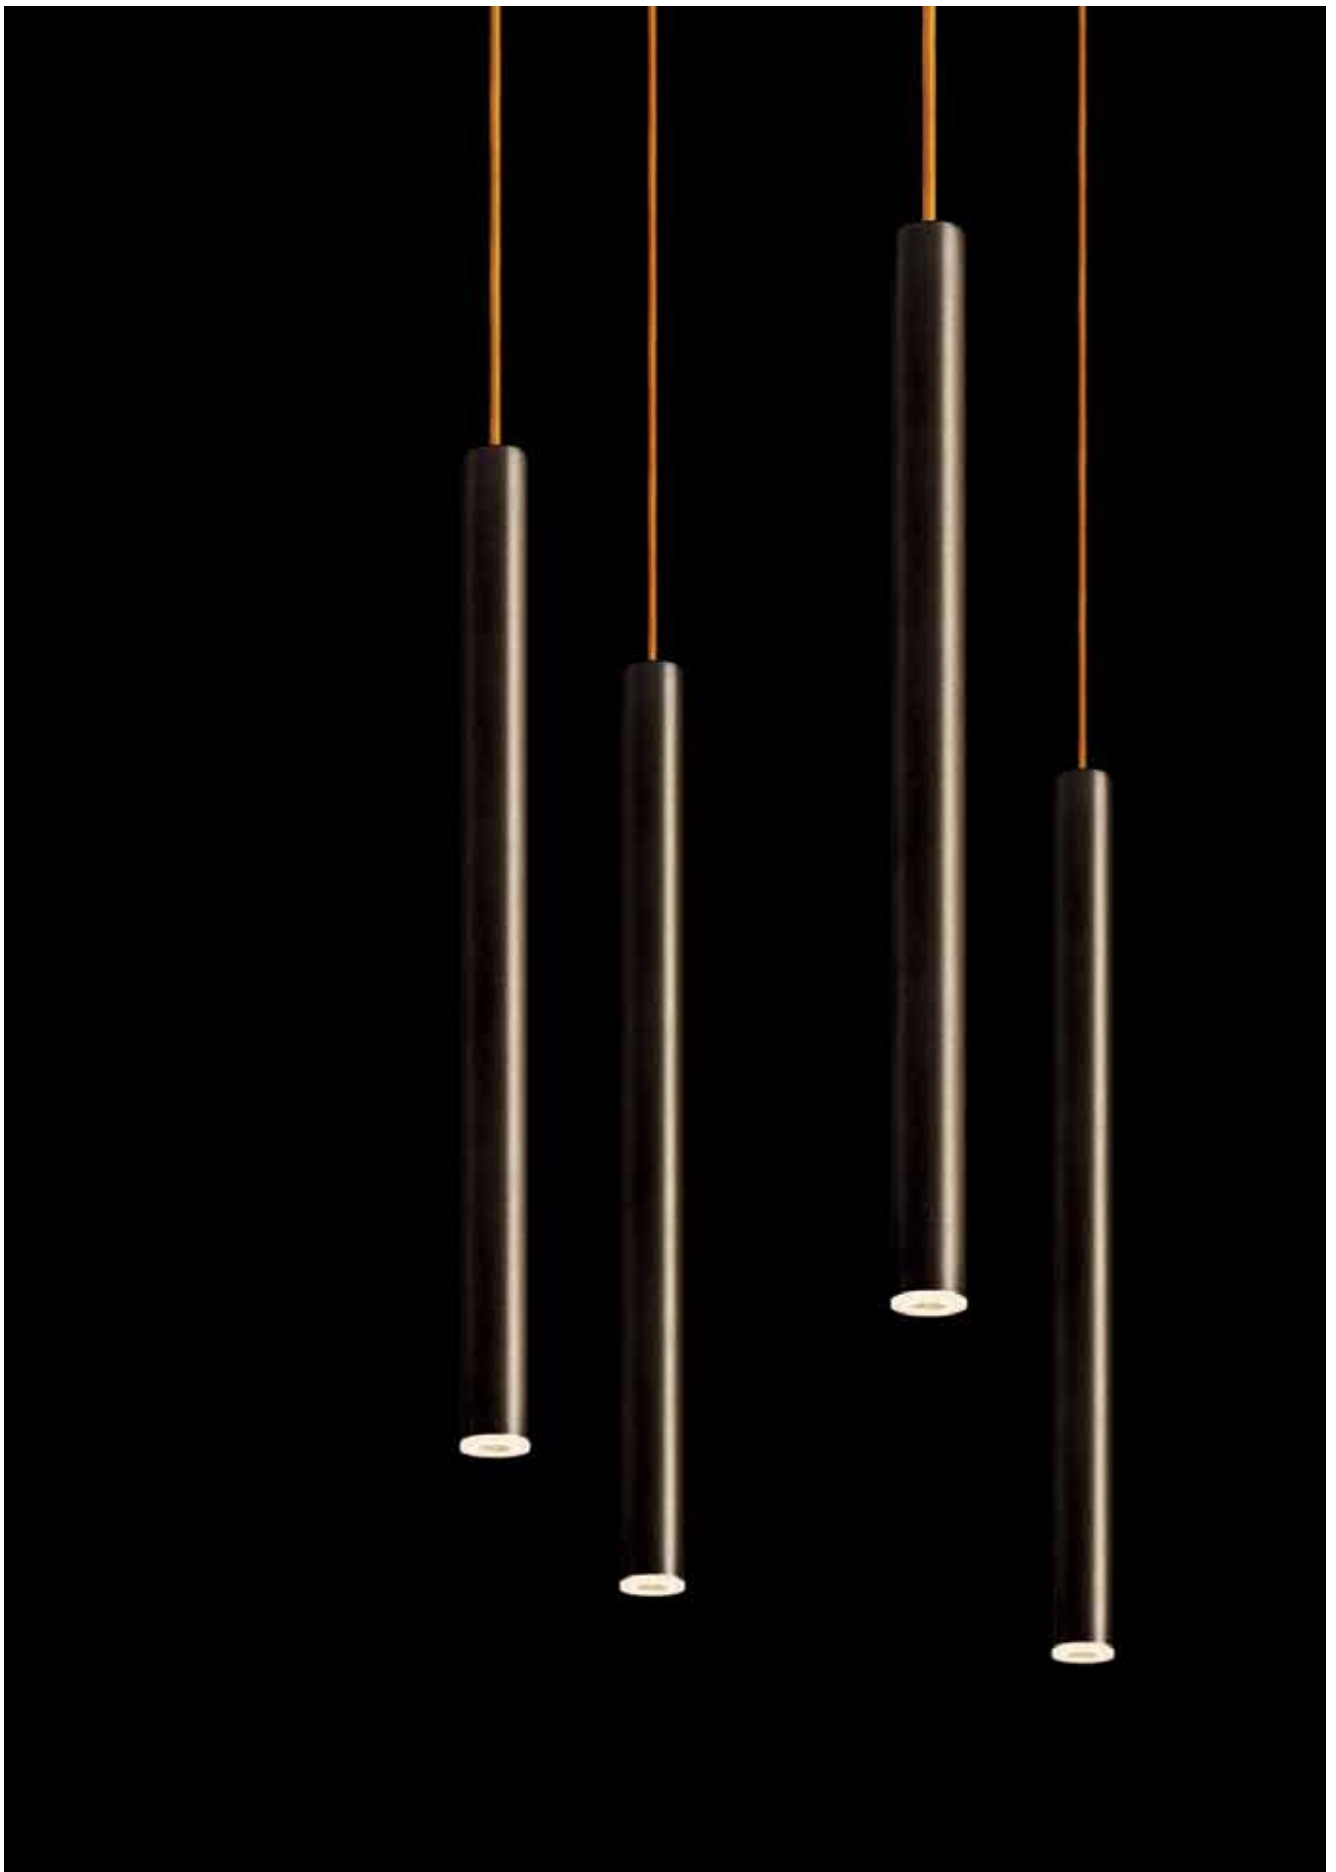

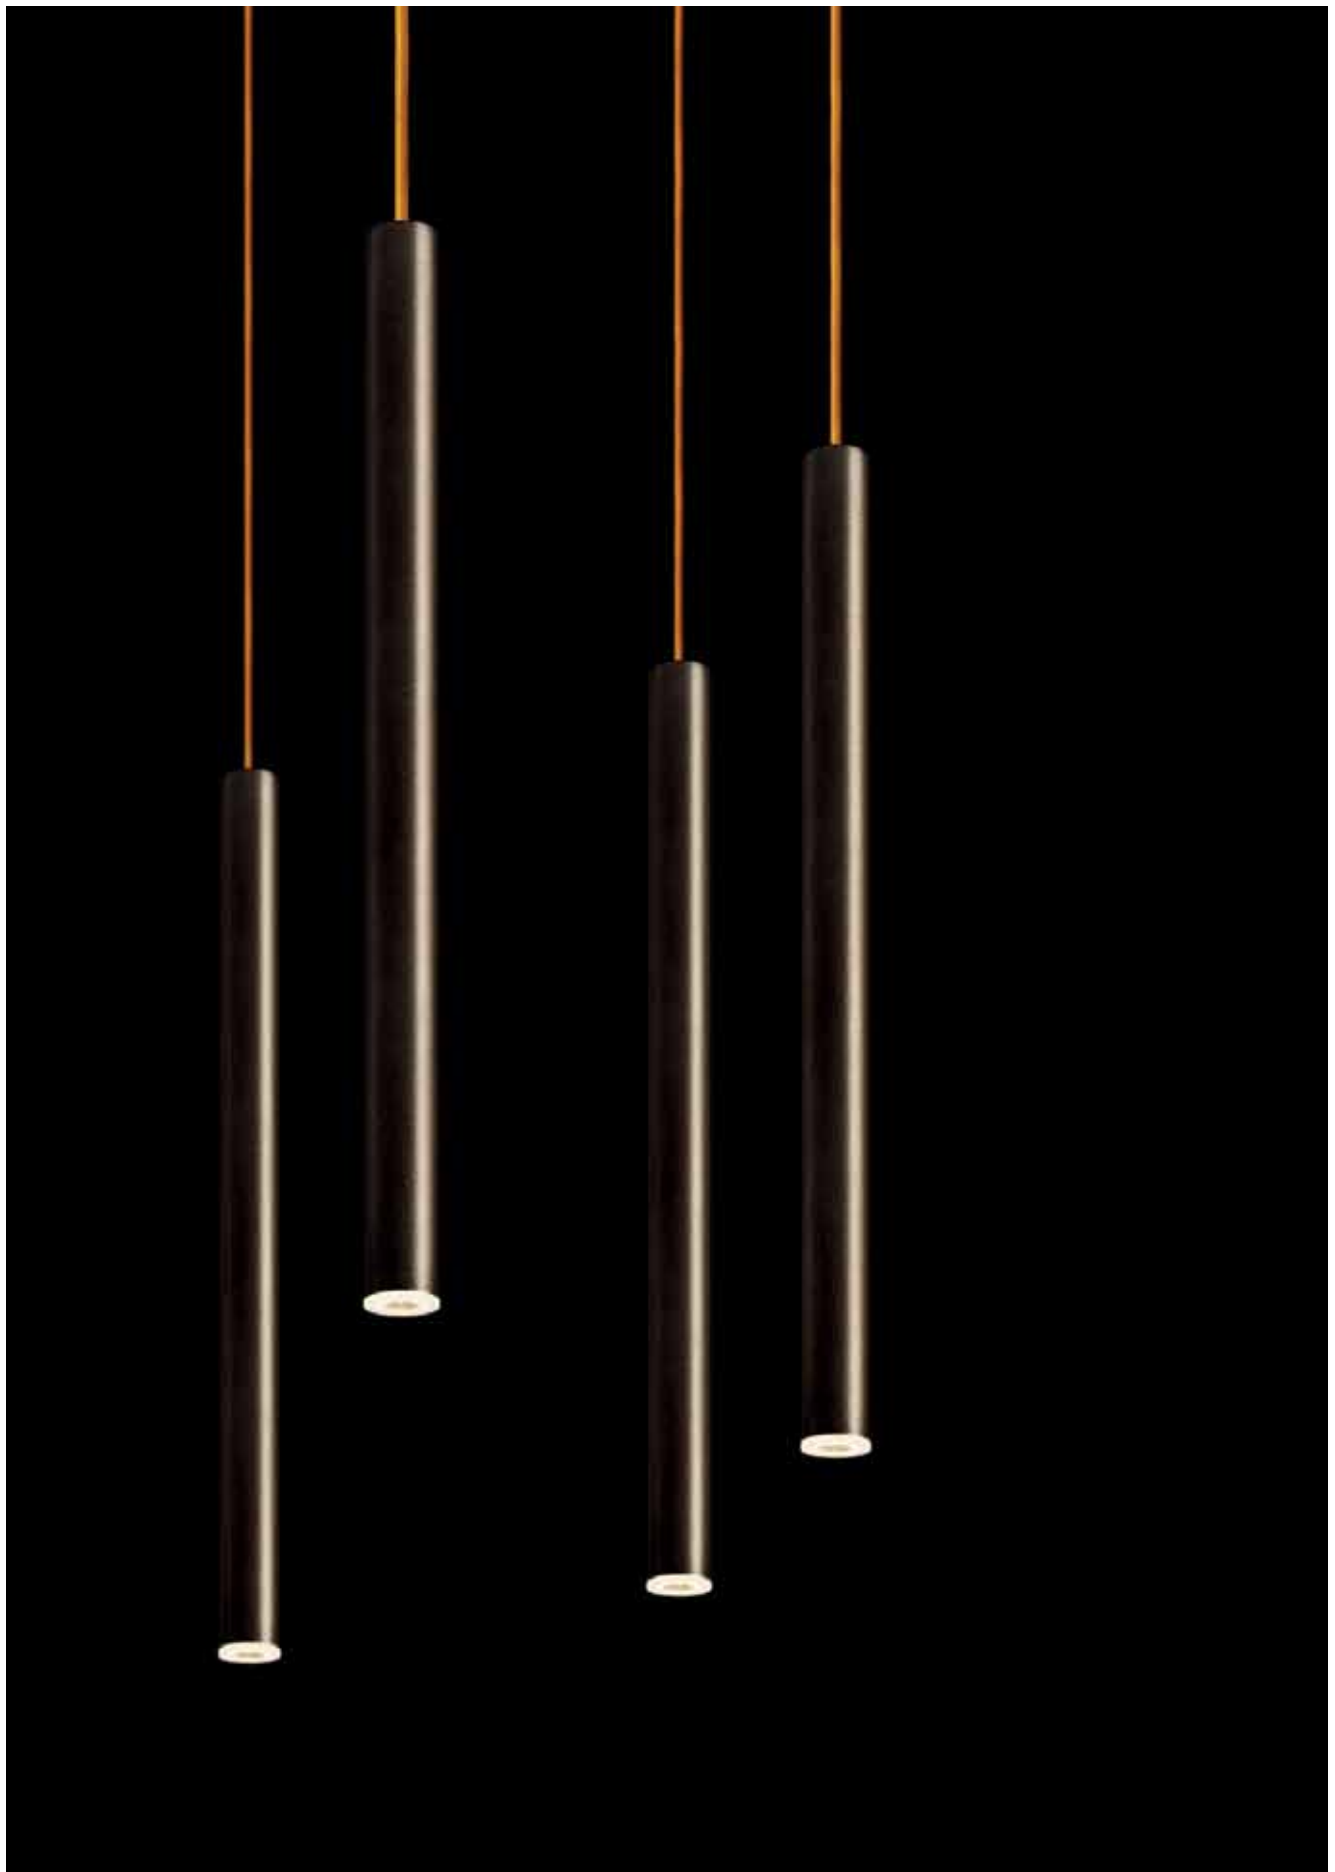



4 MODULES  
SUSPENDED

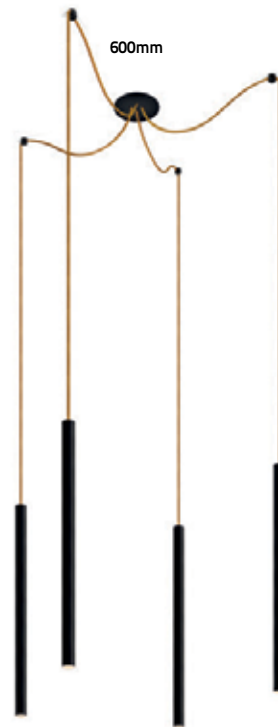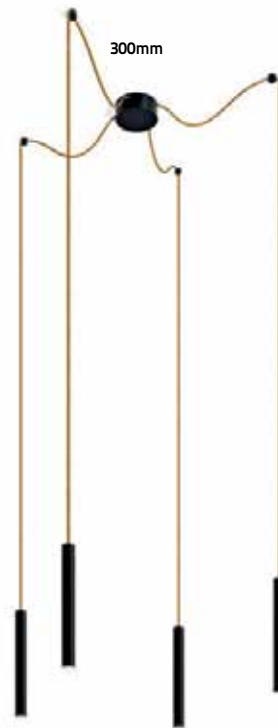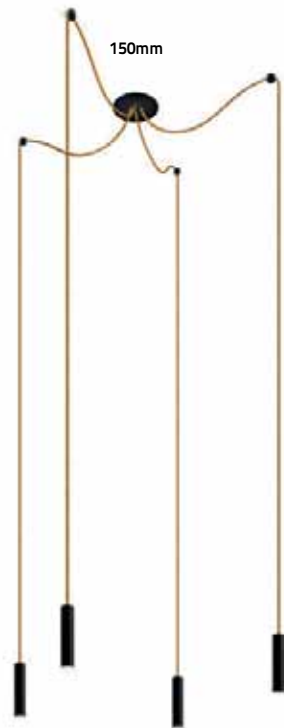



8 MODULES  
SUSPENDED





FINISHES







INDELAGUE  
GROUP

**HEADQUARTERS**

INDÚSTRIA ELÉTRICA DE ÁGUEDA S.A.  
Rua da Mina 465 | Covão  
Zona industrial EN1 Norte  
Apartado 106 / 3754-909  
3750-792 Trofa  
ÁGUEDA | PORTUGAL  
GPS: 40° 36' 00.54" N | 8° 27' 11.76" W  
T. +351 234 612 310 | F. +351 234 624 058  
indelague@indelague.pt  
WWW.INDELAGUE.COM

**UNITED KINGDOM**

ROXO LIGHTING LIMITED  
roxo.london@roxolighting.com  
WWW.ROXLIGHTING.COM

**SPAIN**

INDELAGUE ESPAÑA, S.L.  
Avenida del Ejército, n° 8 - 1° C  
C.P. 15006 | A CORUÑA | ESPAÑA  
comercial@indelague.com  
WWW.INDELAGUE.COM

All data contained in this brochure does not constitute any commitment to INDELAGUE - Indústria Eléctrica de Águeda, S.A. . The company itself, reserves the right to change or modify any information stated without prior notice. The reproduction of this brochure or any part of it is prohibited. Electric/Optical data are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/- 150 K. Unless stated otherwise, the technical data represent rated values for an ambient temperature of 25°C.



F1009/0

Operando em:

