


CALEO-P4 [T5]

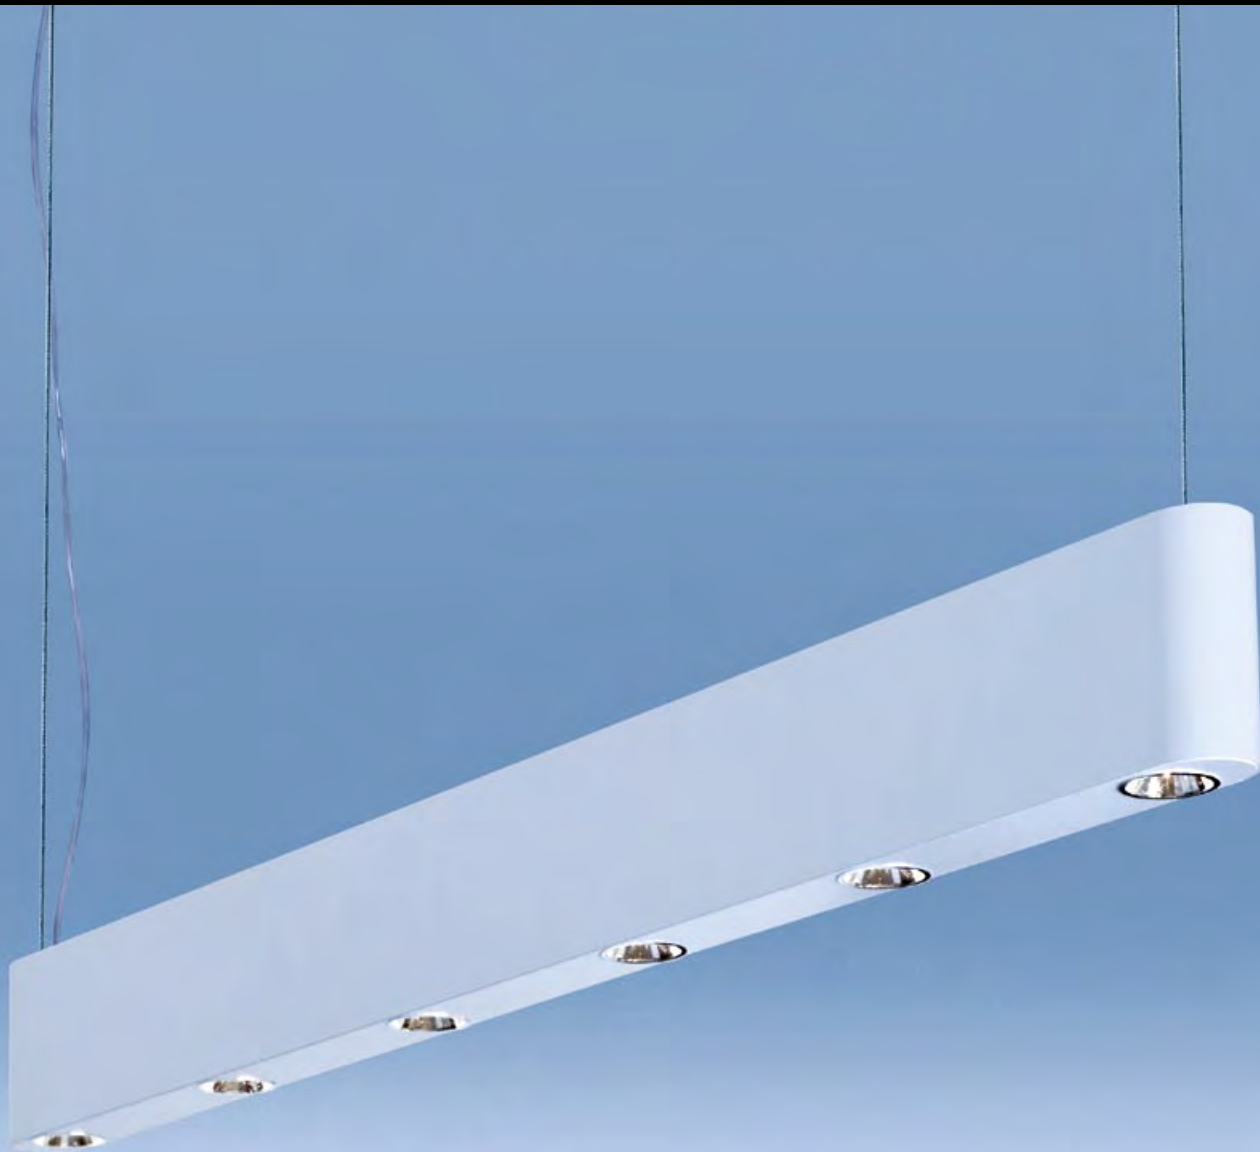

DE

Caleo-P4 | Pendelleuchte für T5-Leuchtstofflampen

- Direkt-/indirekt strahlend
- Leuchtenkörper als H-Profil aus Aluminium-Strangpress-Profil, wahlweise weiß oder silber pulverlackiert
- Alternative Optik-Varianten:
 - Microprismenoptik aus mikrostrukturiertem Spezialacrylglas, geeignet für Bürobeleuchtung gemäß EN 12464-1
 - Opal-Diffusor aus opalem, mattiertem Acrylglas, geeignet für Allgemeinbeleuchtung
- Bei mehrlängigen Varianten versetzt positionierte Fassungen für durchgehendes, nahezu homogenes Erscheinungsbild
- Deckenseitige Staubschutz-Abdeckung aus prismaticem Acrylglas
- Elektronische Vorschaltgeräte wahlweise schaltbar, dimmbar 1-10V oder dimmbar DALI
- Schaltbare Versionen: direkt-indirekt getrennt schaltbar, dimmbare Versionen: direkt-indirekt getrennt schaltbar, zusammen dimmbar
- Werkzeuglos und stufenlos höhenverstellbare Seilabhängung mit transparent ummantelter Zuleitung

Verwandte Produkte | Related products :



CALEO-S2 [LED] 48



CALEO-W3 [TC-L] 100



CALEO-W4 [LED] 102



CALEO-P2 [LED] 170



CALEO-X2 [LED/T5] 252



PRODUKT-INFO (DE)




PRODUCT INFO (EN)

EN

Caleo-P4 | Suspended luminaire for T5 fluorescent lamps

- Direct/indirect light distribution
- Luminaire body as H-formed aluminium profile, optionally white or silver coated
- Alternative optic versions:
 - Microprismatic Screen made of micro-structured special methacrylate, suitable for office lighting according to EN 12464-1
 - Opal-Diffuser made of matt opal methacrylate, suitable for general lighting
- In multiple length versions lampholders are staggered for continuous uniformity
- Topside dust cover made of prismatic methacrylate
- Electronic ballasts, optionally switchable, dimmable 1-10V or dimmable DALI
- Switchable versions: direct-indirect separately switchable, dimmable versions: direct-indirect separately switchable, together dimmable
- Cord suspension continuously height-adjustable without use of tools, power supply cable with transparent insulation


Caleo-P4: Microprismen-Optik | Microprismatic Screen

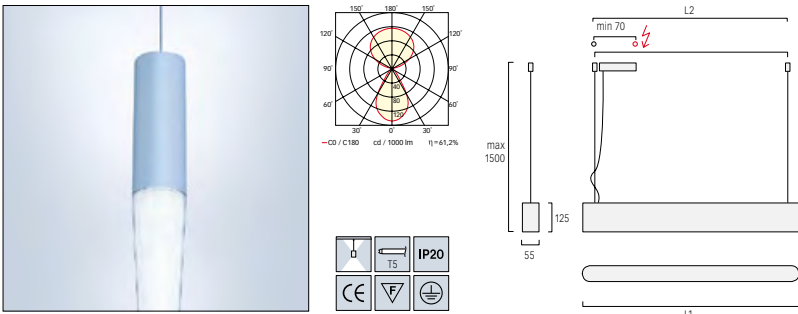

L1	L2	Lamps	Art-Nr. Code	Art-Nr. Code	Kg
			silber silver:		
			weiß white		
1-Längig 1-Length:					
894	834	T5 1x39 + 1x39 W	AP4ASGT-139+139-A5S	AP4AWGT-139+139-A5W	2,8
1194	1134	T5 1x54 + 1x54 W	AP4ASGT-154+154-A5S	AP4AWGT-154+154-A5W	3,7
1494	1434	T5 1x49 + 1x49 W	AP4ASGT-149+149-A5S	AP4AWGT-149+149-A5W	4,9
1494	1434	T5 1x80 + 1x80 W	AP4ASGT-180+180-A5S	AP4AWGT-180+180-A5W	4,9
2-Längig 2-Length:					
1694	1634	T5 2x1x39 + 2x1x39 W	AP4ASGT-2-139+2-139-A5S	AP4AWGT-2-139+2-139-A5W	5,4
2294	2234	T5 2x1x54 + 2x1x54 W	AP4ASGT-2-154+2-154-A5S	AP4AWGT-2-154+2-154-A5W	7,2
2894	2834	T5 2x1x49 + 2x1x49 W	AP4ASGT-2-149+2-149-A5S	AP4AWGT-2-149+2-149-A5W	9,0
2894	2834	T5 2x1x80 + 2x1x80 W	AP4ASGT-2-180+2-180-A5S	AP4AWGT-2-180+2-180-A5W	9,0

Art.-Nr | Code: **G**: EVG standard, **D**: DIM 1-10V, **L**: DIM DALI


Caleo-P4: Opal-Diffusor | Opal Diffuser

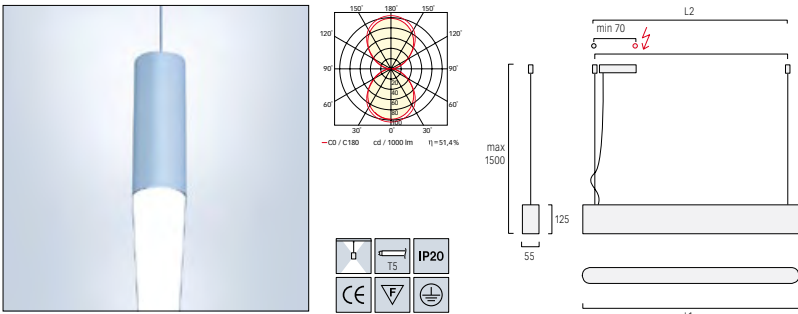

L1	L2	Lamps	Art-Nr. Code	Art-Nr. Code	Kg
			silber silver:		
			weiß white		
1-Längig 1-Length:					
894	834	T5 1x39 + 1x39 W	AP4OSGT-139+139-A5S	AP4OWGT-139+139-A5W	2,8
1194	1134	T5 1x54 + 1x54 W	AP4OSGT-154+154-A5S	AP4OWGT-154+154-A5W	3,7
1494	1434	T5 1x49 + 1x49 W	AP4OSGT-149+149-A5S	AP4OWGT-149+149-A5W	4,9
1494	1434	T5 1x80 + 1x80 W	AP4OSGT-180+180-A5S	AP4OWGT-180+180-A5W	4,9
2-Längig 2-Length:					
1694	1634	T5 2x1x39 + 2x1x39 W	AP4OSGT-2-139+2-139-A5S	AP4OWGT-2-139+2-139-A5W	5,4
2294	2234	T5 2x1x54 + 2x1x54 W	AP4OSGT-2-154+2-154-A5S	AP4OWGT-2-154+2-154-A5W	7,2
2894	2834	T5 2x1x49 + 2x1x49 W	AP4OSGT-2-149+2-149-A5S	AP4OWGT-2-149+2-149-A5W	9,0
2894	2834	T5 2x1x80 + 2x1x80 W	AP4OSGT-2-180+2-180-A5S	AP4OWGT-2-180+2-180-A5W	9,0

Art.-Nr | Code: **G**: EVG standard, **D**: DIM 1-10V, **L**: DIM DALI

Caleo-P4: Spot-Optik | Spot Optic

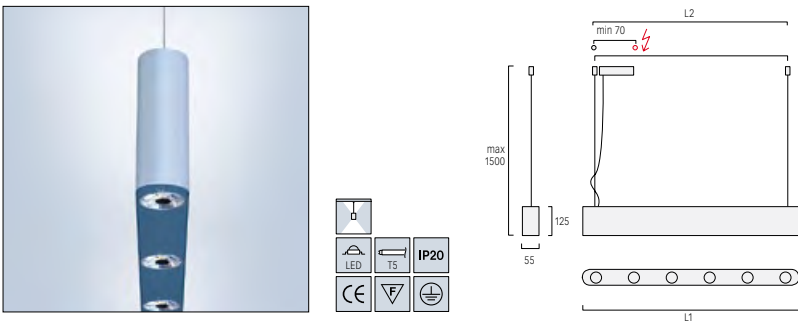

L1	L2	Lamps	Art-Nr. Code	Art-Nr. Code	Kg
inklusive Leuchtmittel lamp included:					
			silber silver:		
			weiß white		
1-Längig 1-Length:					
894	834	T5 1x39 + LED 4x4 W	AP4DSGT-139+4MR-A5S	AP4DWGT-139+4MR-A5W	2,8
1194	1134	T5 1x54 + LED 6x4 W	AP4DSGT-154+6MR-A5S	AP4DWGT-154+6MR-A5W	3,7
1494	1434	T5 1x49 + LED 7x4 W	AP4DSGT-149+7MR-A5S	AP4DWGT-149+7MRA5W	4,9
1494	1434	T5 1x80 + LED 7x4 W	AP4DSGT-180+7MR-A5S	AP4DWGT-180+7MR-A5W	4,9

Art.-Nr | Code: **G**: EVG standard, **D**: DIM 1-10V, **L**: DIM DALI