


Arena

Designed by Franco Mirenzli (Registered)



Colour | 11 | 75

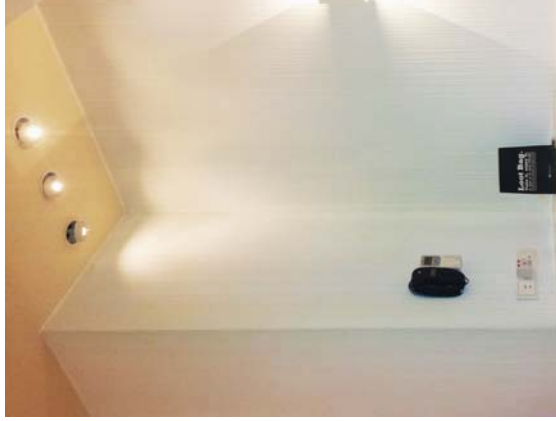

Related products:



ARENA DUE
Wall/Ceiling
P. 236-237



ARENA DUE
Track
P. 152-153



MULTIARENA
P. 122-125




- Features** IP20
- Recessed LED spotlight with 350° rotation and 0°-90° tilt out mechanism.
 - Made of die cast aluminium.
 - The light body is designed for maximum LED heat dissipation for passive cooling.

- Long life LED light source provides IR and UV free emission.
- Other optics or colour temperatures K or CRI available upon request.
- Easy installation via clamping wings for ceiling thickness 1 to max.30mm.
- Fixture is available in 2 different sizes.
- Optical grade metalized polycarbonate reflector optics.
- Designed and manufactured to comply with European standard EN 60598.

Applications

- A brand new wall washing lighting system with the ability to illuminate the vertical surface and the upper area of wall.
- A great product for energy saving and with very low maintenance factors.
- Application areas: retail, commercial, galleries, hospitality, exhibits, hotels, health and beauty areas, residential, office lobbies.

Arena




Ø 142

5001-K30D24	With 21W LED 3000K 1800lm	24°
5001-K40D24	With 21W LED 4000K 2000lm	24°
5001-K30D50	With 21W LED 3000K 1800lm	50°
5001-K40D50	With 21W LED 4000K 2000lm	50°

Passive dissipation, inclusive of remote driver 220-240V 50/60Hz, CRI>80.
Dali/L leading-Trailing edge/1-10V DC/PWM dimmable drivers options upon request.
Other colour temperatures K or CRI are available upon request.

Micro Arena



Ø 82

5002-K30D32	With 10W LED 3000K 720lm	32°
5002-K40D32	With 10W LED 4000K 830lm	32°
5002-K30D45	With 10W LED 3000K 720lm	45°
5002-K40D45	With 10W LED 4000K 830lm	45°
5002-K30D65	With 10W LED 3000K 720lm	65°
5002-K40D65	With 10W LED 4000K 830lm	65°

Passive dissipation, inclusive of remote driver 100-240V 50/60Hz, CRI>80.
Dali/L leading-Trailing edge/1-10V DC/PWM dimmable drivers options upon request.
Other colour temperatures K or CRI are available upon request.