


CALEO-A2/X2 [LED/T5]

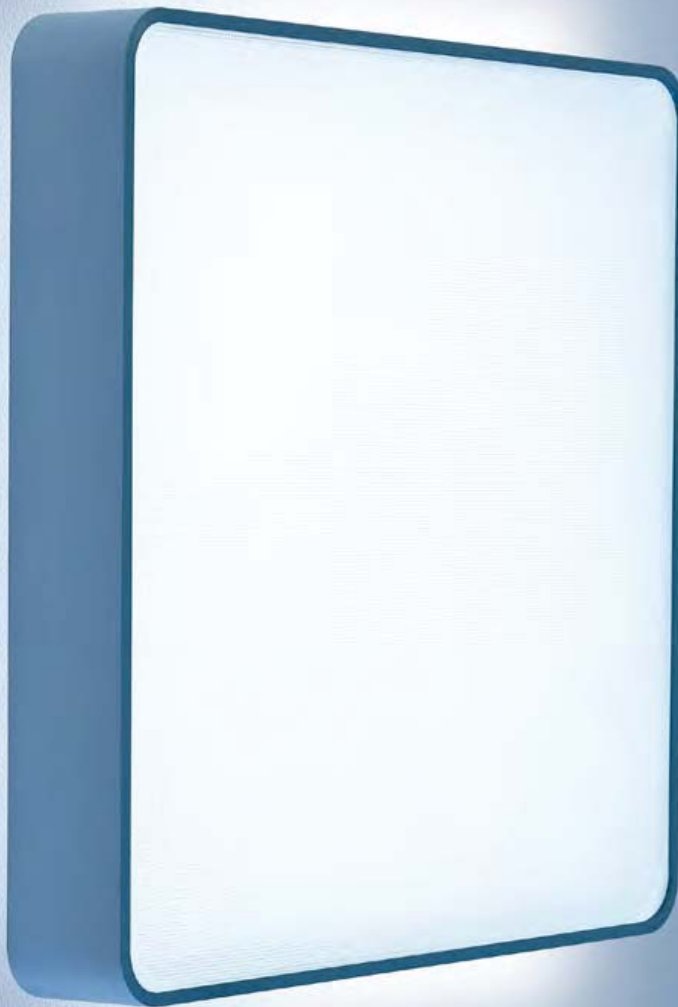

DE

- Caleo-A2: Direktstrahlend; Leuchtenkörper aus Aluminium-Strangpress-Profil, wahlweise weiß oder silber lackiert; Opal-Diffusor aus opalem, mattiertem Acrylglas
- Caleo-X2: Direktstrahlend mit indirekter Lichtkorona; Leuchtenkörper aus Aluminium-Strangpress-Profil, wahlweise weiß oder silber lackiert; Opal-Diffusor aus opalem, mattiertem Acrylglas
- Elektronische Vorschaltgeräte wahlweise schaltbar, dimmbar 1-10V oder dimmbar DALI
- LED-Versionen wahlweise mit Lichtfarbe 3000°K oder 4000°, Farbwiedergabe Ra>80, Lebensdauer >50.000 Stunden
- Elektronischer Konverter schaltbar, auf Anfrage dimmbar 1-10V oder dimmbar DALI
- Notlichtkomponenten optional integrierbar

EN

- Caleo-A2: direct light distribution; luminaire body made of aluminium profile, optionally white or silver coated; opal-diffuser made of matt opal methacrylate
- Caleo-X2: Direct light distribution with indirect lighting corona; luminaire body made of aluminium profile, optionally white or silver coated; opal-diffuser made of matt opal methacrylate
- Electronic ballast, optionally switchable, dimmable 1-10V or dimmable DALI
- LED-Versions optionally with colour temperature 3000°K or 4000°K, colour rendering Ra>80, lamp life > 50,000 hours
- Electronic converter switchable, on request dimmable 1-10V or dimmable DALI
- Emergency lighting components optionally integrable

Verwandte Produkte | Related products :



CALEO-S2 [LED] 48



CALEO-M3 [TC-L] 100



CALEO-W4 [LED] 102



CALEO-P2 [LED] 170



CALEO-X2 [LED/T5] 252






PRODUKT-INFO (DE)



PRODUCT INFO (EN)



Caleo-A2: Opal-Diffusor | Opal Diffuser



L	H	Leuchtmittel Lamps	Art-Nr. Code	Art-Nr. Code	Kg
			silber silver:		
			weiß white:		
270	75	TC-L 2x18 W	AA20SEL-218	AA20WEL-218	2,5
370	75	TR-5 1x22+40 W	AA20SER-122-40	AA20WER-122-40	3,5
370	75	TR-5 1x40 W	AA20SER-140	AA20WER-140	3,4
370	75	TR-5 1x55 W	AA20SER-155	AA20WER-155	3,4
470	75	TR-5 1x60 W	AA20SER-160	AA20WER-160	4,8
470	75	TR-5 1x40+60 W	AA20SER-140-60	AA20WER-140-60	4,9
614	75	T5 8x14 W	AA20SET-814	AA20WET-814	6,4
Getrennt schaltbar separately switchable:					
370	75	TR-5 1x22+40 W	AA20SGR-122-40	AA20WGR-122-40	3,5
470	75	TR-5 1x40+60 W	AA20SGR-140-60	AA20WGR-140-60	4,8

Art.-Nr | Code: **E**: EVG standard, **D**: DIM 1-10V, **L**: DIM DALI




Caleo-A2 [LED]: Opal-Diffusor | Opal Diffuser



L	H	LED-Info*	Art-Nr. Code	Art-Nr. Code	Kg
			silber silver:		
			weiß white:		
Warm White 3000°K:					
304	55	LED-24 W /1350lm/830	AA20SEP-24W	AA20WEP-24W	5,1
614	55	LED-44 W /3250lm/830	AA20SEP-44W	AA20WEP-44W	5,6
Neutral White 4000°K:					
304	55	LED-24 W /1450lm/840	AA20SEP-24N	AA20WEP-24N	5,1
614	55	LED-44 W /3400lm/840	AA20SEP-44N	AA20WEP-44N	5,6

Art.-Nr | Code: **E**: Konverter standard, **D**: DIM 1-10V, **L**: DIM DALI
 * Anschlussleistung /Leuchten-Lichtstrom | Power consumption /Luminaire luminous flux



Caleo-X2: Opal-Diffusor | Opal Diffuser



L	H	Leuchtmittel Lamps	Art-Nr. Code	Art-Nr. Code	Kg
			silber silver:		
			weiß white:		
Einfach schaltbar one-step switchable					
270	75	TR-5 1x22 W	AX20SER-122	AX20WER-122	2,7
270	75	TC-L 2x18 W	AX20SEL-218	AX20WEL-218	2,7
370	75	TR-5 1x22+40 W	AX20SER-122-40	AX20WER-122-40	3,7
370	75	TR-5 1x40 W	AX20SER-140	AX20WER-140	3,6
370	75	TR-5 1x55 W	AX20SER-155	AX20WER-155	3,6
470	75	TR-5 1x60 W	AX20SER-160	AX20WER-160	5,0
470	75	TR-5 1x40+60 W	AX20SER-140-60	AX20WER-140-60	5,1
614	75	T5 8x14 W	AX20SET-814	AX20WET-814	6,6
Getrennt schaltbar separately switchable:					
370	75	TR-5 1x22+40 W	AX20SGR-122-40	AX20WGR-122-40	3,7
470	75	TR-5 1x40+60 W	AX20SGR-140-60	AX20WGR-140-60	5,0

Art.-Nr | Code: **E**: EVG standard, **D**: DIM 1-10V, **L**: DIM DALI

Caleo-X2 [LED]: Opal-Diffusor | Opal Diffuser



L	H	LED-Info*	Art-Nr. Code	Art-Nr. Code	Kg
			silber silver:		
			weiß white:		
Warm White 3000°K:					
304	55	LED-24 W /1350lm/830	AX20SEP-24W	AX20WEP-24W	5,1
614	55	LED-44 W /3250lm/830	AX20SEP-44W	AX20WEP-44W	5,6
Neutral White 4000°K:					
304	55	LED-24 W /1450lm/840	AX20SEP-24N	AX20WEP-24N	5,1
614	55	LED-44 W /3400lm/840	AX20SEP-44N	AX20WEP-44N	5,6

Art.-Nr | Code: **E**: Konverter standard, **D**: DIM 1-10V, **L**: DIM DALI
 * Anschlussleistung /Leuchten-Lichtstrom | Power consumption /Luminaire luminous flux