




# Arco

Wall mounted grazing light

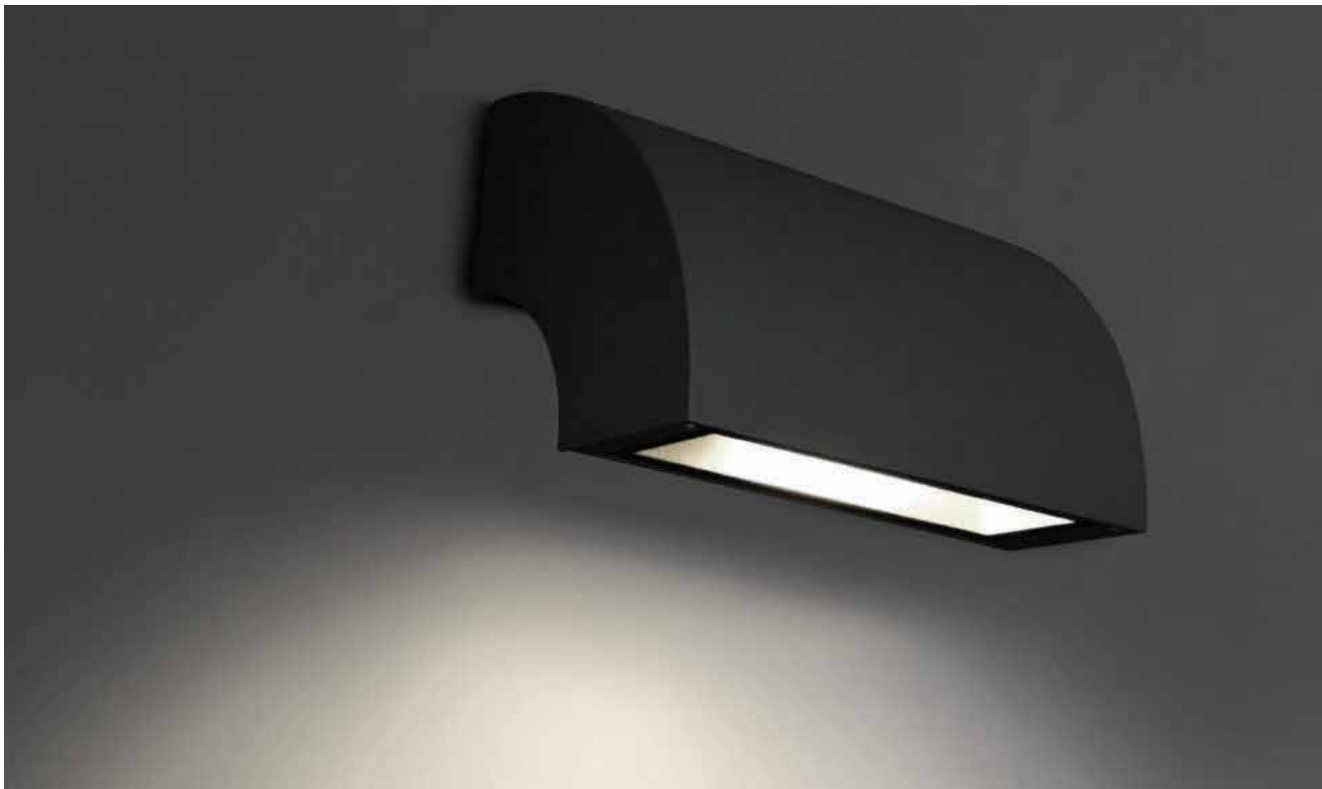

## Body

Surface mounted grazing light with body is made in cast aluminium, flush toughened thermal shock clear glass diffuser, weatherproof durable silicone gasket and external screws made of stainless steel.

Simple to install via cable entry. Usable as a upwards or downwards luminaire.

## LED sources

Lextar SMD LED.  
CRI: 80 | CCT: 3000K, 4000K.

Other CRI and CCT options available on request.

## Related Products

**Astra**  
P.358



## Optic

Opal difuser. Wide angle available

## Accessories

No accessories available.

## Driver

Supplied with integrated no-dimmable driver.

## Finish

Superior polyester powder coat in black and grey colour.

## Applications

Wall or ceiling mounted luminaire of timeless shape design and can be fit with the light flowing upwards or downwards. Application areas: entrances, corridors, walkways, terraces.




# Arco



## Arco Up or down

Surface mounted

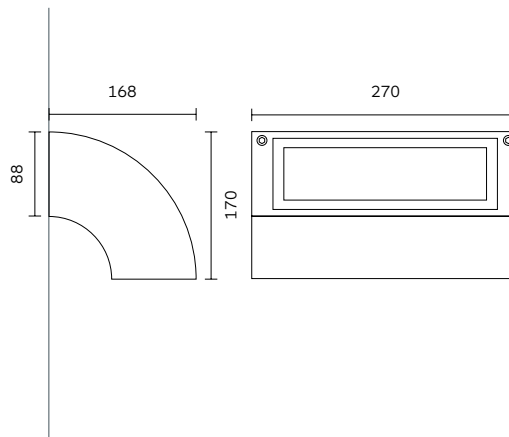

Code ordering example: **3 4 7 6 B T 1 1 - 8 0 3 0 0 0 D 0 1 0**

	Product code	Light source code*		>CRI	CCT**	LED Power	Nominal Lumen	Beam angle (BA°)	Driver Options	Finish		
Arco	<b>3476</b>	<b>BT11</b>	Lextar	SMD	<b>80</b>	<b>30</b>	3000K	10W	600 lm	EW ( <b>00</b> )	<b>D0</b> No Dim	<b>10</b> ■ Black
Up or Down					<b>40</b>	<b>4000K</b>			650 lm		<b>DX</b> DMX	<b>29</b> ■ Grey (Outdoor)
											<b>DA</b> Dali Dim	
											<b>D1</b> 0-10 Dim	
											<b>DP</b> Phase	
											<b>DC</b> CASAMBI	

### Notes:

\* For complete code ordering information, please see page 377.

\*\* For other CCT options, please contact us.

EW = Extra Wide. Ordering code; **00**.