


Canali

EdgeForms System

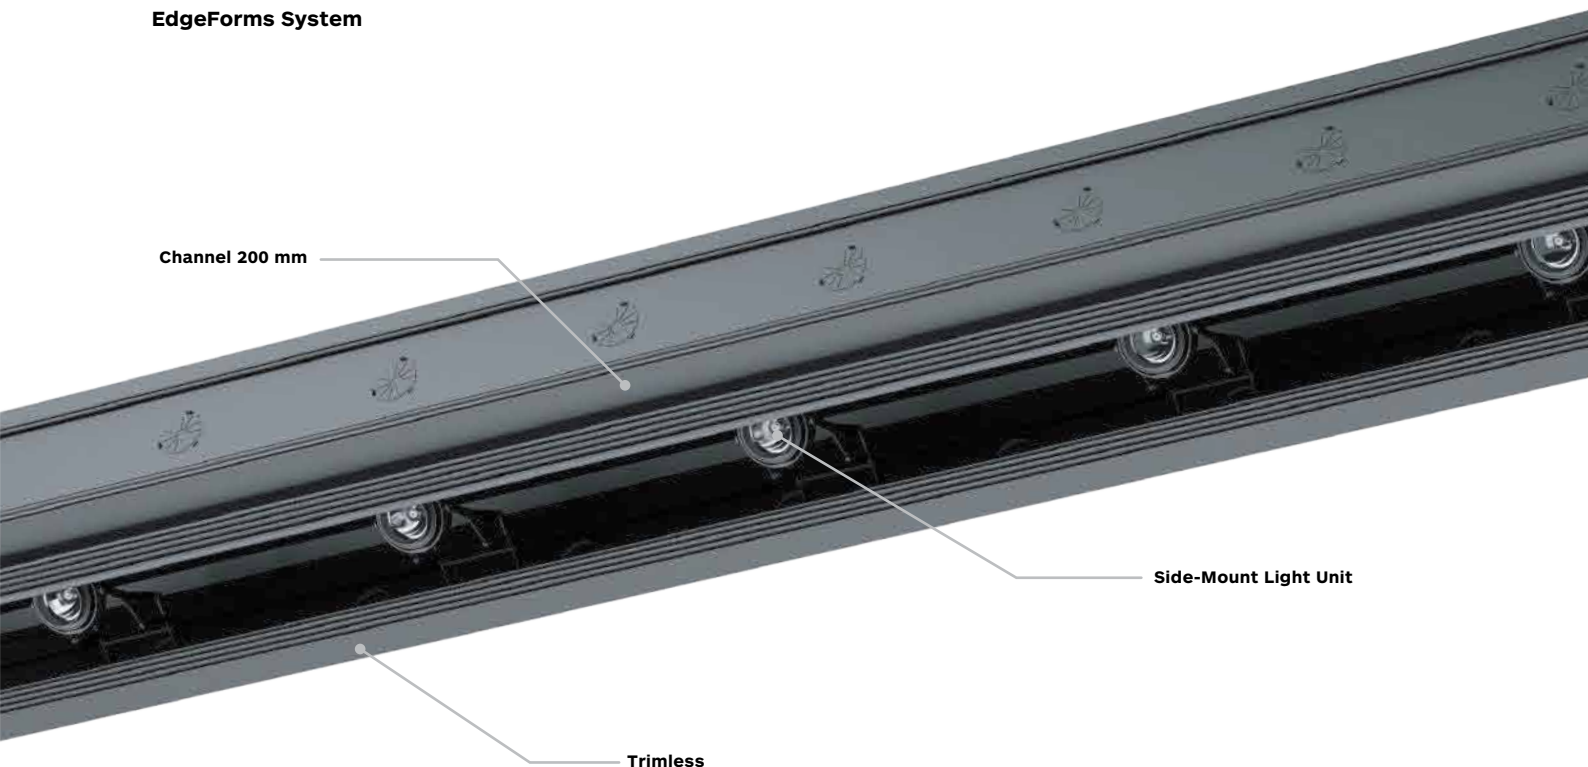

Body

All channel parts in extruded aluminium. Luminaire spot body in cast aluminium, luminaire connection arm in extruded aluminium.

Clean, unobtrusive trimless installation with above-ceiling suspension. Easy modular structure with 150mm, 200mm and 90° "L" unit.

The system is completed by traverse set, end set and end cover plate. 3 circuit track mounted inside the channel. Spotlight units are mounted on the top or side of channel interior.

Possibility to upgrade the system after the installation adding fixtures or circuits.

Accessories

Accommodation modules for: fire sprinklers, surveillance camera, HVAC diffuser, speakers, WiFi access point available upon request.

Finish

Powder coat in black colour.

LED sources

For light source data refer to the single spotlight technical information.

Optic


Lens or reflector, according with the single spotlight technical information.




Driver

Driver not included or integrated, according with the chosen spotlight. Different diming options available on request.

Applications

A comprehensive range of trimless multi - directional display lighting system available in wide variety of sizes and configurations, using a wide option of lamp types. Application areas: retail, museums, galleries, exhibits, jewelry shops, residential, lift lobbies.



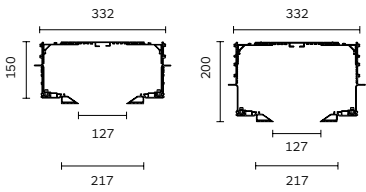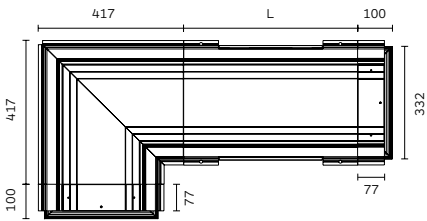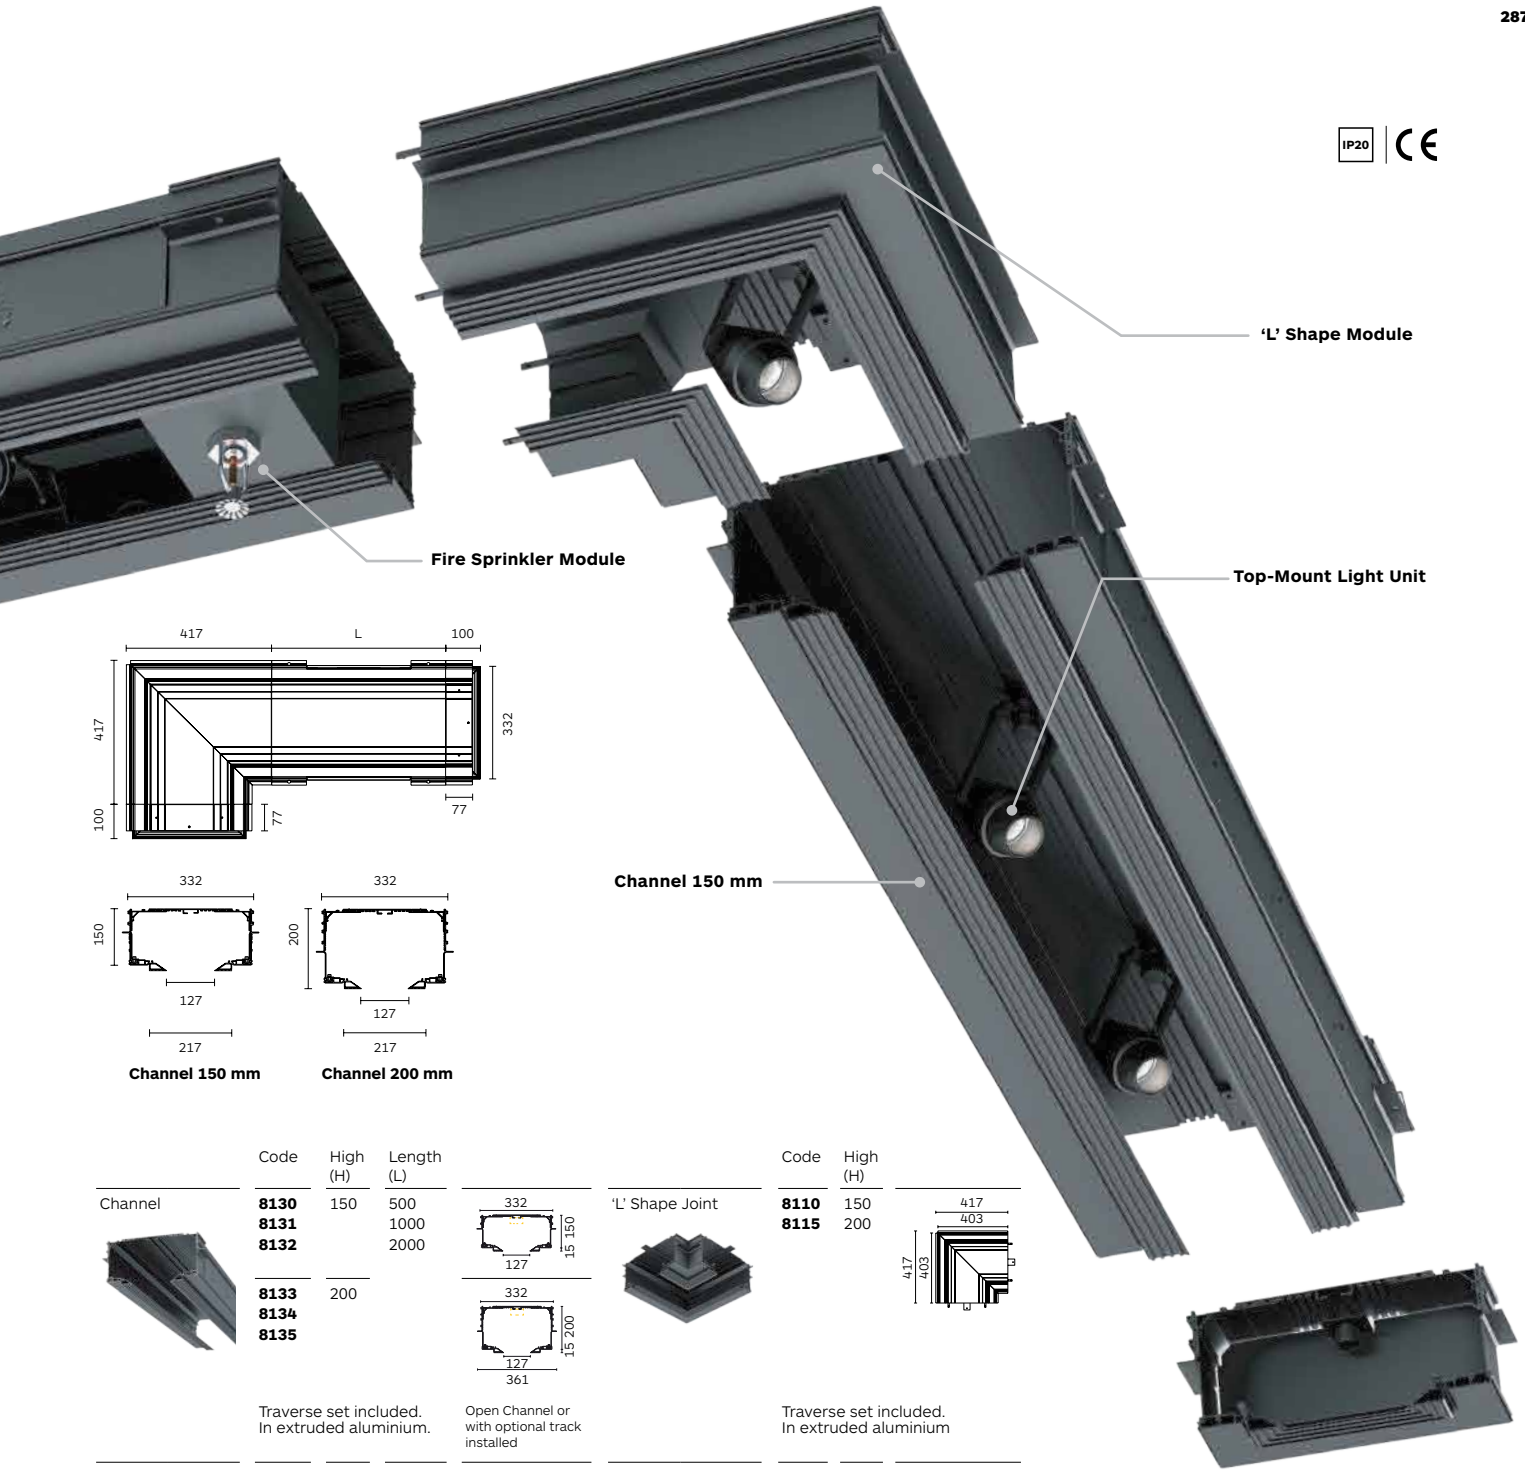

Channel 150 mm

Channel 200 mm

Channel 150 mm

	Code	High (H)	Length (L)
Channel	8130	150	500
	8131		1000
	8132		2000
Channel	8133	200	
	8134		
	8135		

Traverse set included. In extruded aluminium.

Open Channel or with optional track installed

	Code	High (H)
'L' Shape Joint	8110	150
	8115	200

Traverse set included. In extruded aluminium

	Code	High (H)	Length (L)
Traverse Set	8101		500
	8102		1000
	8103		2000
	8104		3000


In extruded aluminium. Pair.

	Code	High (H)
End cover plate	8136	150
	8137	200

In extruded aluminium. Pair Includes Art. 8105.

	Code	End cover
Ends set	8105	End cover

In extruded aluminium. Pair.

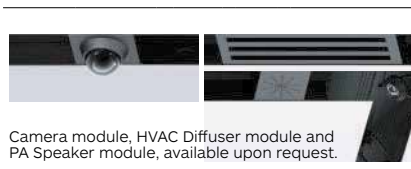

Camera module, HVAC Diffuser module and PA Speaker module, available upon request.






Canali Side Mounted




Canali Micro Gimbal

Side mounted

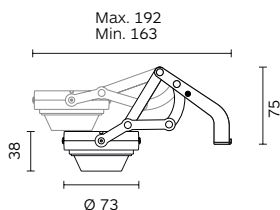


Canali Gimbal

Side mounted



Canali Zero 66

Side mounted



Code ordering example 8 3 0 1 G U 5 3 - 0 0 0 0 0 0 D 0 1 0

	Product code	Light source code	>CRI	CCT**	LED power	Nominal lumen	Beam angle (BA°)	Driver Options	Finish
Canali Micro Gimbal	8301	GU53 Retrofit MR16-GU5.3	00	00	\	\	00	D0 No Dim	10 ■ Black
Canali Gimbal	8303	AR11 AR111	00	00	\	\	00		
Canali Zero 66	8370	BC22 Citizen COB	90	30 3000K	22W	2422 lm	16 / 30 / 60	D0 No Dim	
			40 4000K			2577 lm		DA Dali Dim DP Phase Dim DC CASAMBI D1 1-10V Dim	

Notes:

* For complete code ordering information, please see page 377.

** For other CCT options, please contact us.

Transformer and driver are not included. To be ordered separately.






Canali Top Mounted




Canali Mini Swinger

Top mounted



Canali Micro Conos

Top mounted



Code ordering example **8 3 0 7 G U 5 3 - 0 0 0 0 0 0 D 0 1 0**

	Product code	Light source code*		>CRI	CCT**	LED power	Nominal lumen	Beam angle (BA°)	Driver Options	Finish
Canali Mini Swinger	8307	GU53 Retrofit	MR16-GU5.3	00	00	\	\	00	D0 No Dim	10 ■ Black
Canali Micro Conos	8309	AR11	AR111	00	00	\	\	00		

Notes:

- * For complete code ordering information, please see page 377.
 - ** For other CCT options, please contact us.
- Transformer not included. To be ordered separately.
For channel height 150 mm only.







«Light and the rational forms
are locked in combat; light sets
them into motion, bends what
is straight, makes parallels oval,
inscribes circles in the intervals,
makes the intervals active».

Paul Klee







Recessed Downlight System

