




Circo & Quadro

Recessed Round & Square 300 | 400 | 630

Circo



Quadro



Body

Round and square mounting trim in polycarbonate with brackets for trim/trimless installation on a ceiling thickness of max. 30mm.

Luminaire body in injection molded polycarbonate with easy removable satin-opal diffuser inclusive of durable silicon gasket. IP66 (dust tight and jetproof).

Easy maintenance. No tools required due to the removable diffuser. Available in three different sizes.

LED sources

Samsung SMD LED.

CRI: 90 | CCT: 3000K, 4000K.

Other CRI and CCT options, Tuneable White and DimToWarm versions available on request.

Optic

Equipped with acrylic satin opal diffuser.

Related Products

**Circo
Surface**

P.204



**Quadro
Surface**

P.204



**Circo
Pendant**

P.228



**Quadro
Pendant**

P.228



Accessories

No accessories available.

Driver

Supplied with No-dimable integrated driver.

Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.

Finish

Powder coat in white colour.

Applications

Recessed architectural decorative luminaire designed to provide specification of exceptional glare free and high IP grade quality lighting at prices to fit budgets.

Application areas: retail, hospitality, offices, schools and community buildings.





Circo



IP66


IK09

850°




Circo 300 / 400 / 630

Round Trim

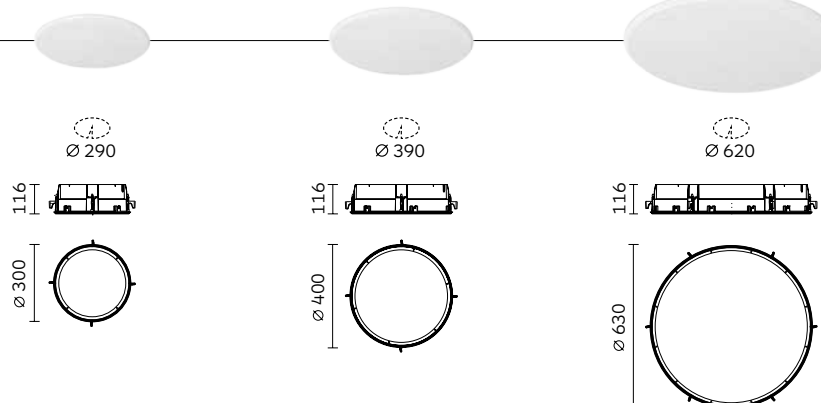

Circo 300 / 400 / 630

Round Trimless

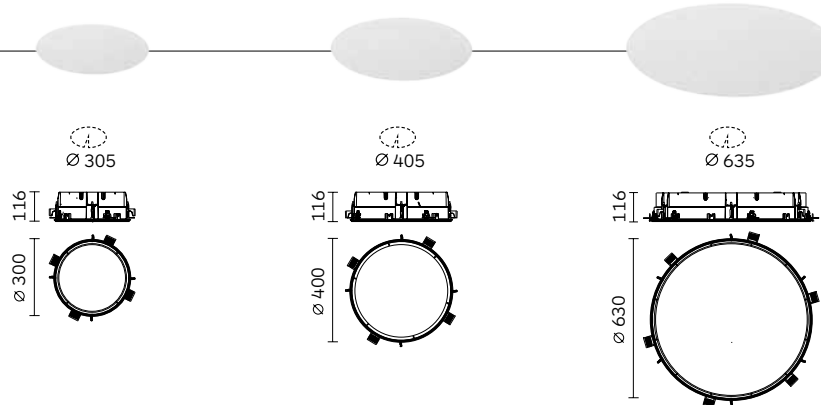

Code ordering example: **RD36 BM11-903000D011**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Circo 300 Round	RD36	BM11	90	30 3000K	30W	2650 lm	EW(00)	D0 No Dim	11 White
	RD59			40 4000K		2850 lm		DA Dali Dim	
Circo 400 Round	RD34				45W	3800 lm		DP Phase Dim	
	RD57					4000 lm		DC CASAMBI	
Circo 630 Round	RD32				80W	6800 lm		D1 0-10V Dim	
	RD55					7100 lm			

Notes:

* For complete code ordering information, please see page 377.

** For other CCT options, please contact us.

EW = Extra Wide. Ordering code; **00**.






Quadro




Quadro 300 / 400 / 630

Square Trim ☒

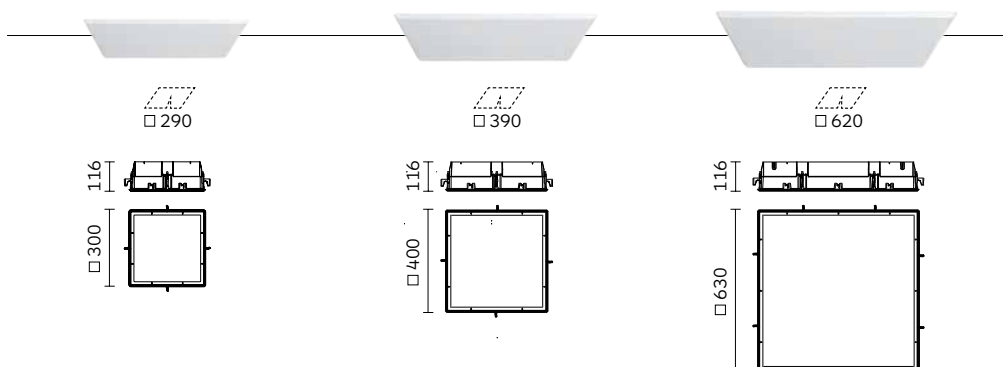

Quadro 300 / 400 / 630

Square Trimless ☐

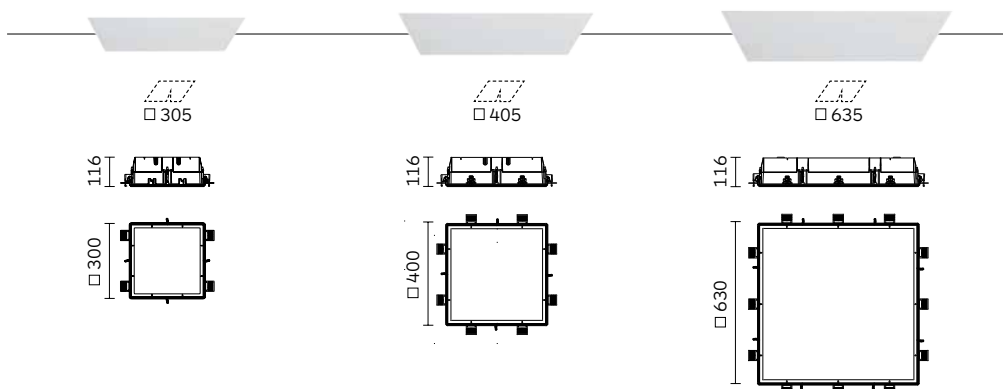

Code ordering example: **RD 3 5 BM 1 1 - 9 0 3 0 0 0 D 0 1 1**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Quadro 300 Square	RD35 ☒	BM11	90	30 3000K	30W	2650 lm	EW(00)	D0 No Dim	11 ☒ White
	RD60 ☐			40 4000K		2850 lm		DA Dali Dim	
Quadro 400 Square	RD33 ☒				45W	3800 lm		DP Phase Dim	
	RD58 ☐					4000 lm		DC CASAMBI	
Quadro 630 Square	RD31 ☒				80W	6800 lm		D1 0-10V Dim	
	RD56 ☐					7100 lm			

Notes:

* For complete code ordering information, please see page 377.

** For other CCT options, please contact us.

EW = Extra Wide. Ordering code; **00**.





Circo & Quadro Recessed Family configuration options

Code ordering example: **R D 3 6 B M 1 1 - 9 0 3 0 0 0 D 0 1 1**

Circo / Quadro 300 Round & Square

Fixed

Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
RD36	BM11 Samsung SMD	90	30 3000K	30W	2650 lm	EW(00)	D0 No Dim	11 White
RD59			40 4000K		2850 lm		DA Dali Dim	
RD35							DP Phase Dim	
RD60							DC CASAMBI	
							D1 0-10V Dim	

Circo / Quadro 400 Round & Square

Fixed

Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
RD34	BM11 Samsung SMD	90	30 3000K	45W	3800 lm	EW(00)	D0 No Dim	11 White
RD57			40 4000K		4000 lm		DA Dali Dim	
RD33							DP Phase Dim	
RD58							DC CASAMBI	
							D1 0-10V Dim	

Circo / Quadro 630 Round & Square

Fixed

Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
RD32	BM11 Samsung SMD	90	30 3000K	80W	6800 lm	EW(00)	D0 No Dim	11 White
RD55			40 4000K		7100 lm		DA Dali Dim	
RD31							DP Phase Dim	
RD56							DC CASAMBI	
							D1 0-10V Dim	

Notes:

For other CCT options, please contact us.

