

Concept O - T


Armaturhus:

Extruderet aluminium

Overfladebehandling:

Pulverlakeret

Afskærmning:

Polycarbonat

Lyskilde:

LED 3000K CRI >80

Forventet levetid:

65.000T/L80, B10, Ta:25°C

LED driver:

200-240 VAC/50/60 Hz

White	W	Golden eye	Q
Gray	G	Sable	L
Black	B	Auburn	U
Blue	U	Rusty chain	R
Green	V	Pure chocolate	C
Yellow	T	Mint	M
Red	K	Dark rock	B
Jungle	N	Carbon	I

EN 60598-1, EN 60598-2-2



Dimensioner (mm)	Hulmål (mm)	vægt (kg)
Ø650x115	Ø654/516	4,2
Ø950x115	Ø954/816	6,3
Ø1250x115	Ø1254/1116	8,3
Ø1550x115	Ø1554/1416	10,5
Ø1950x115	Ø1954/1816	13,2

Ø650



Ø950



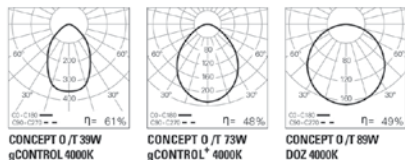

Ø1250



Ø1550



Ø1950


Skal specificeres ved køb:

- ◆ afskærmning
- ◆ farve på armaturhus
- ◆ Kelvin (standard 3000K)
- ◆ dæmpbar driver
- ◆ dynamisk hvid LED
- ◆ 1 ell 3T nødbelysning

URG	W	Lm	Lm/W	n(%)
Opal afskærmning				
<16	39	5640	78	54
<19	56	8460	79	52
<19	73	11280	80	52
<19	89	14100	78	49
--	112	16920	--	--
Microprismatisk polycarbonat plus				
<16	39	5640	69	48
<16	56	8460	73	48
<16	73	11280	74	48
<16	89	14100	70	44
--	112	16920	--	--
Microprismatisk polycarbonat				
<16	39	5640	88	61
<16	56	8460	89	59
<16	73	11280	90	58
<16	89	14100	86	54
--	112	16920	--	--