



Rolo & Dado

Surface



Body

Wall/ceiling mounted spotlight with light body and driver box in cast aluminium.

For retrofit version, easy relamping by the removable lamp front ring via simple snap-in catch action.

Tiltable vertically 0-90° and routable horizontally 350°.

LED sources

Citizen CLU series. SORAA SLE Optical Light Engine. CRI: 90, 95 | CCT: 3000K, 4000K.

Other CRI and CCT options available on request.

Optic

Lens.

Narrow, medium and wide beam angle available.

Accessories

Linear spread, honeycomb louvre. Snap System™ accessories available for SORAA SLC series with narrow beam angle.

Finish

Powder coat in white or grey colour.

Driver

Driver box inclusive of no-dimable driver.

Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.

Applications


A versatile and very directional cylindrical spotlight. The very compact sizes make it ideal for applications where the distance between ceiling and spot is an issue.

Application areas: retail, museums, residential, hospitality, window displays.

Related Products


Dado
Eurotype
Track &
Low Voltage
Track

P.162-165



Rolo
Eurotype
Track &
Low Voltage
Track

P.162-165








Rolo



Rolo

Surface

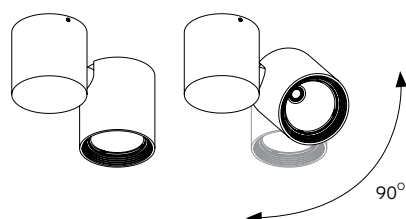

Code ordering example: **1 1 5 9 B B 2 2 - 9 0 3 0 1 4 D 0 1 1**

	Product Code	Light Source Code*	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Rolo	1159	BB22	90	30 3000K	6W	706 lm	14 / 24 / 34	D0 No Dim	11 □ White
Surface				40 4000K		757 lm			75 ■ Grey

Notes:

* For complete code ordering information, please see page 377.

** For other CCT options, please contact us.

For related accessories, please see page 197.








Dado



Dado

Surface

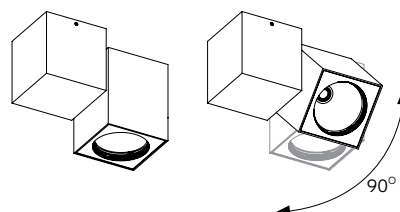

Code ordering example: **1 1 5 8 B B 2 2 - 9 0 3 0 1 4 D 0 1 1**

	Product Code	Light Source Code*	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Dado	1158	BB22	90	30 3000K	6W	706 lm	14 / 24 / 34	D0 No Dim	11 □ White
Surface				40 4000K		757 lm			75 ■ Grey

Notes:

* For complete code ordering information, please see page 377.

** For other CCT options, please contact us.

For related accessories, please see page 197.





Rolo & Dado Surface Family configuration options



Code ordering example: 1 1 5 8 B B 2 2 - 9 0 3 0 1 4 D 0 1 1

Dado & Rolo

Ceiling & Wall

Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
1158  Rolo	BB22 Bridgelux COB	90	30 3000K	7W	706 lm	14 / 24 / 34	D0 No Dim	11 ☐ White
1159  Dado			40 4000K		757 lm		DA Dali Dim	75 ☒ Grey
	BS12 Soraa SLC-16	95		8W	460 lm	10	DP Phase Dim	
					480 lm		DC CASAMBI	
				12W	720 lm	15 / 25 / 36	D1 0-10V Dim	
					755lm			
GU53 Retrofit	MR16-GU5.3	00	00	/	/	//(00)	DP Phase Dim	
GU10	GZ10-GU10							

Optical Accessories



Product / Optical Accessories

Linear Spread
Colour 41

Honeycomb Louvre
Colour 10

Rolo & Dado Surface
GU5.3

2362

2361

For Soraa specific accessories, please contact us and we will provide the detailed information.

Notes:

For other CCT options, please contact us.

