



DomoLED

Recessed Round & Square 90 | 175 | 230



Body

Round and square mounting trim in cast aluminium with springs for trim installation on a ceiling thickness of max. 25mm or brackets for trimless installation on a ceiling thickness of 12-15mm.

Luminaire body of formed white coated steel. Diffuser made of satin opal acrylic. Front trim/diffuser is fitted by snap-in catch action.

IP44 (protection against dust and spraying water). Available in three sizes.

LED sources

Samsung SMD LED.

CRI: 90 | CCT: 3000K, 4000K.

Other CRI and CCT options, Tuneable White and DimToWarm versions available on request.

Optic

Equipped with acrylic satin opal diffuser.

Related Products


Galaxis Pro Recessed

P.122




DomoLED Surface

P.212



DomoLED Pendant

P.238



Accessories

No accessories available.

Driver

Supplied with No-dimable remote driver.

Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.

Finish

Powder coat in black, white or grey colour.

Applications

Provide a visual comfortable energy-efficient with a wide uniform general lighting solution, also ideal for use in under canopy or bathroom locations.

Application areas: offices, receptions, hospitals, bathrooms, residential, hotels.






DomoLED Round





DomoLED 90 / 175 / 230

Round Trim

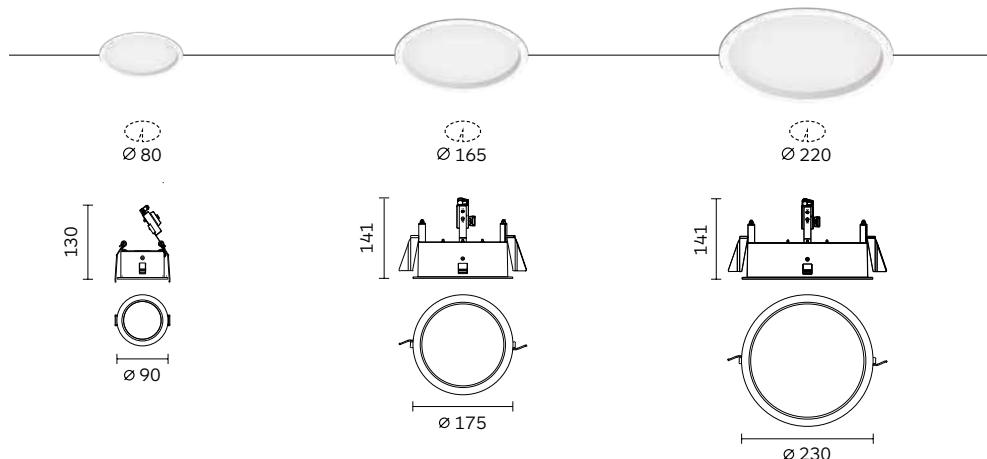

DomoLED 90 / 175 / 230

Round Trimless

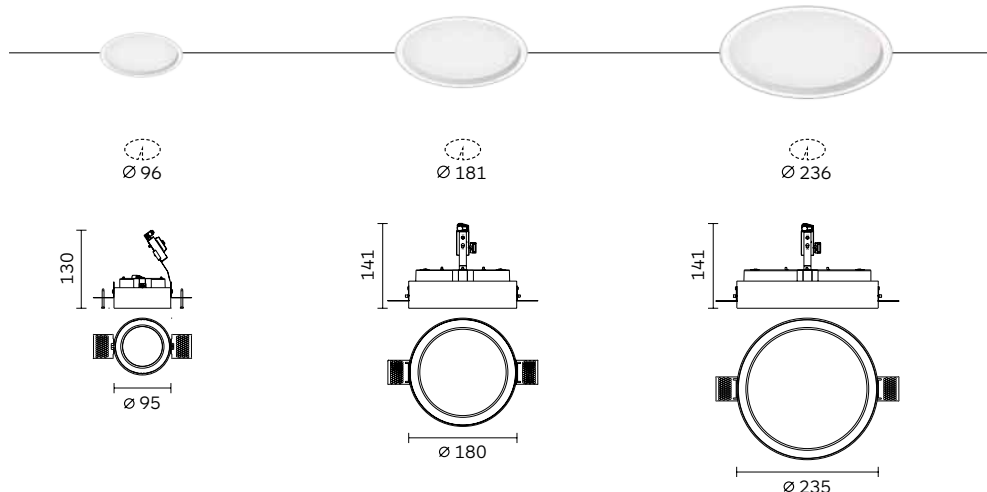

Code ordering example: **RE 23 BM 11 - 90 30 00 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
DomoLED 90 Round	RE23	BM11	90	30 3000K	8W	930 lm	EW(00)	D0 No Dim	10 Black
	RE24			40 4000K		950 lm		DA Dali Dim	11 White
DomoLED 175 Round	RE21				22W	2520 lm		DP Phase Dim	75 Grey
	RE22					2650 lm		DC CASAMBI	
DomoLED 230 Round	RE19				35W	3600 lm		D1 0-10V Dim	
	RE20					3760 lm			

Notes:

* For complete code ordering information, please see page 377.

** For other CCT options, please contact us.

EW = Extra Wide. Ordering code: **00**.






DomoLED Square




DomoLED 90 / 175 / 230

Fixed Square Trim ☒

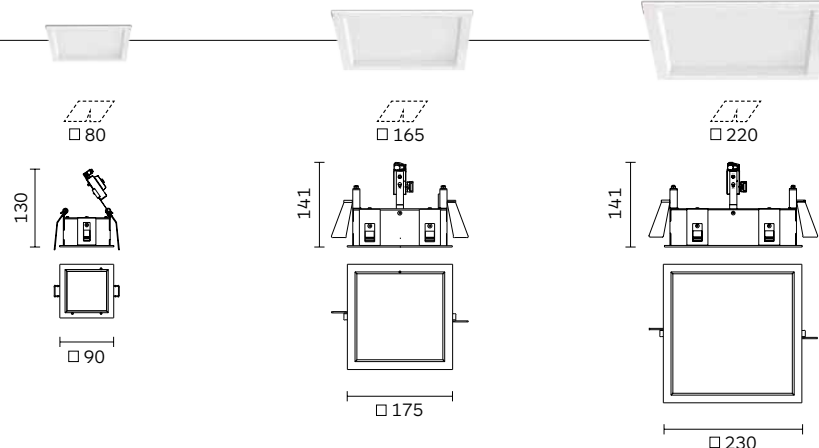

DomoLED 90 / 175 / 230

Square Trimless ☐

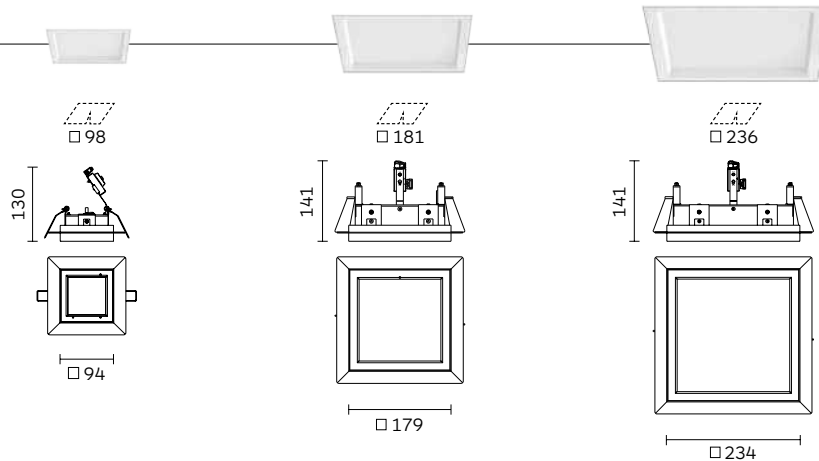

Code ordering example: **RD26 BM11-90 3000 D010**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
DomoLED 90 Square	RD26 ☒	BM11	90	30 3000K	8W	930 lm	EW(00)	D0 No Dim	10 ☒ Black
	RE28 ☐			40 4000K		950 lm		DA Dali Dim	11 ☐ White
DomoLED 175 Square	RD18 ☒	BM11			22W	2520 lm		DP Phase Dim	75 ☒ Grey
	RE27 ☐					2650 lm		DC CASAMBI	
DomoLED 230 Square	RE25 ☒	BM11			35W	3600 lm		D1 0-10V Dim	
	RE26 ☐					3760 lm			

Notes:

* For complete code ordering information, please see page 377.

** For other CCT options, please contact us.

EW = Extra Wide. Ordering code; **00**.





DomoLED Recessed Family configuration options

Code ordering example: **R E 2 3 B M 1 1 - 9 0 3 0 0 0 D 0 1 0**

DomoLED 90 Round & Square

Fixed

Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
RE23 ☒	BM11 Samsung SMD5630	90	30 3000K	8W	930 lm	EW(00)	D0 No Dim	10 ☒ Black
RE24 ☐			40 4000K				DA Dali Dim	11 ☐ White
RD26 ☒							DP Phase Dim	75 ☒ Grey
RE28 ☐							DC CASAMBI	
							D1 0-10V Dim	

DomoLED 175 Round & Square

Fixed

Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
RE21 ☒	BM11 Samsung SMD5630	90	30 3000K	22W	2520 lm	EW(00)	D0 No Dim	10 ☒ Black
RE22 ☐			40 4000K				DA Dali Dim	11 ☐ White
RD18 ☒							DP Phase Dim	75 ☒ Grey
RE27 ☐							DC CASAMBI	
							D1 0-10V Dim	

DomoLED 230 Round & Square

Fixed

Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
RE19 ☒	BM11 Samsung SMD5630	90	30 3000K	35W	3600 lm	EW(00)	D0 No Dim	10 ☒ Black
RE20 ☐			40 4000K				DA Dali Dim	11 ☐ White
RE25 ☒							DP Phase Dim	75 ☒ Grey
RE26 ☐							DC CASAMBI	
							D1 0-10V Dim	

Notes:

For other CCT options, please contact us.

