



DomoLED

Surface Round & Square 90 | 175 | 230



Body

Round or square ceiling mounted luminaire with light trim in cast aluminium inclusive of diffuser made of satin opal acrylic.

Light body in extruded aluminium. Easy installation via twist and lock action using PC injection moulded gear.

Front trim/diffuser removable by snap-in catch action. Available in 3 different sizes.

Accessories

No accessories available.

Finish

Powder coat in black, white or grey colour.

LED sources

Samsung SMD LED.

CRI: 90 | CCT: 3000K, 4000K.

Other CRI and CCT options available on request.

Optic

Equipped with acrylic satin opal diffuser.

Driver

Inclusive of integrated no-dimable driver.

Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.

Applications

A simple and stylish design. The 3 directional emitting satin acrylic cover enables the architect and lighting designers the ability to integrate it into most applications including wet rooms.

Application areas: office, schools, gyms, community buildings, supermarkets, retail.

Related Products


DomoLED Recessed

P.128




DomoLED Pendant

P.238






DomoLED Round



DomoLED 90 / 175 / 230

Surface Round

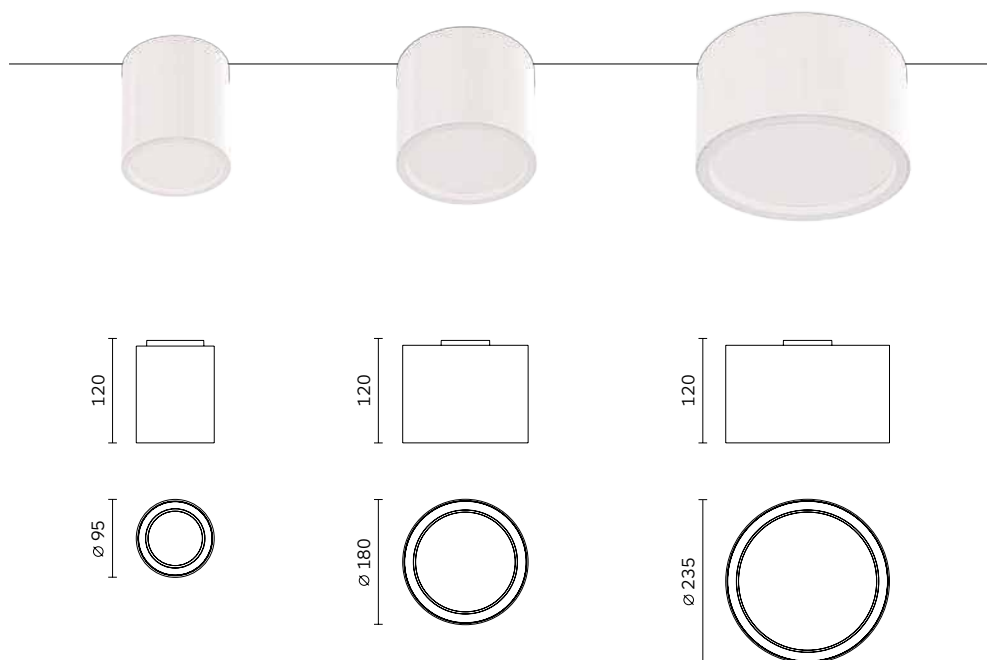

Code ordering example: **1 2 3 3 B M 1 1 - 9 0 3 0 0 0 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
DomoLED 90 Surface Round	1233	BM11	90	30 3000K	8W	928 lm	EW(00)	D0 No Dim	10 ■ Black
				40 4000K		976 lm		DP Phase Dim	11 □ White
								D1 0-10V Dim	75 ■ Grey
DomoLED 175 Surface Round	1232				22W	2552 lm		D0 No Dim	
						2684 lm		DA Dali Dim	
DomoLED 230 Surface Round	1231				34W	3944 lm		DP Phase Dim	
						4148 lm		DC CASAMBI	
								D1 0-10V Dim	

Notes:

* For complete code ordering information, please see page 377.


** For other CCT options, please contact us.

EW = Extra Wide. Ordering code: **00**.






DomoLED Square



DomoLED 90 / 175 / 230

Surface Square

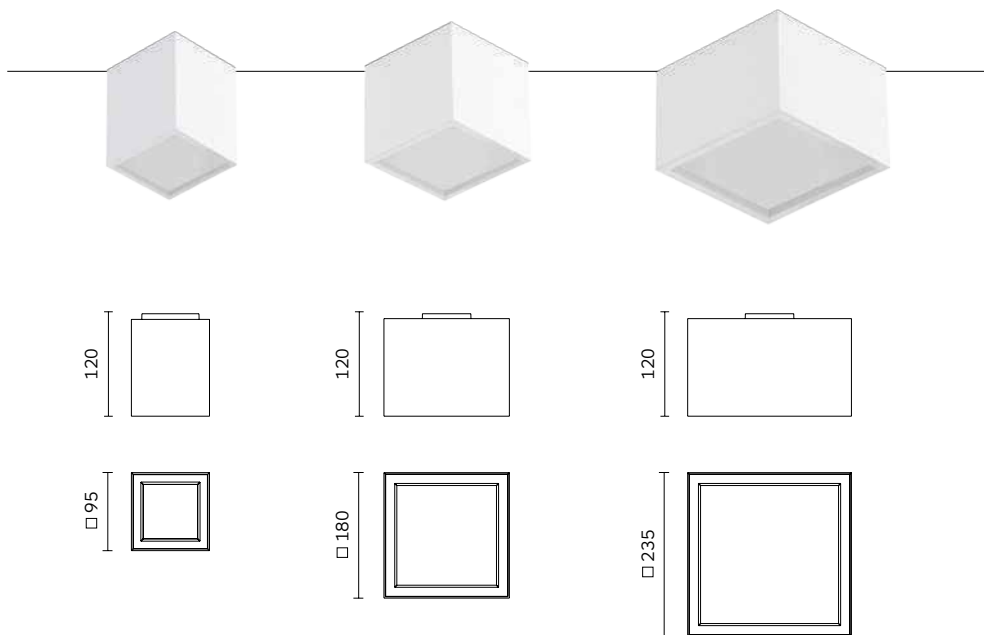

Code ordering example: **1 2 3 6 B M 1 1 - 9 0 3 0 0 0 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
DomoLED 90 Surface Square	1236	BM11	90	30 3000K	8W	928 lm	EW(00)	D0 No Dim	10 ■ Black
				40 4000K		976 lm		DP Phase Dim	11 □ White
								D1 0-10V Dim	75 ■ Grey
DomoLED 175 Surface Square	1235				22W	2552 lm		D0 No Dim	
						2684 lm		DA Dali Dim	
DomoLED 230 Surface Square	1234				34W	3944 lm		DP Phase Dim	
						4148 lm		DC CASAMBI	
								D1 0-10V Dim	

Notes:

* For complete code ordering information, please see page 377.

** For other CCT options, please contact us.

EW = Extra Wide. Ordering code: **00**.





DomoLED Ceiling Family configuration options

Code ordering example: 1 2 3 3 B M 1 1 - 9 0 3 0 0 0 D 0 1 0

DomoLED 90

Ceiling

Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
1233 Round	BM11 Samsung SMD	90	30 3000K	8W	928 lm	EW(00)	D0 No Dim	10 Black
1236 Square			40 4000K		976 lm		DP Phase Dim	11 White
							D1 0-10V Dim	75 Grey

DomoLED 175

Ceiling

Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
1232 Round	BM11 Samsung SMD	90	30 3000K	22W	2252 lm	EW(00)	D0 No Dim	10 Black
1235 Square			40 4000K		2684 lm		DA Dali Dim	11 White
							DP Phase Dim	75 Grey
							DC CASAMBI	
							D1 0-10V Dim	

DomoLED 230

Ceiling

Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
1231 Round	BM11 Samsung SMD	90	30 3000K	34W	3944 lm	EW(00)	D0 No Dim	10 Black
1234 Square			40 4000K		4148 lm		DA Dali Dim	11 White
							DP Phase Dim	75 Grey
							DC CASAMBI	
							D1 0-10V Dim	

Notes:

For other CCT options, please contact us.

