



BB9701

Steamer floor


floor / stand alone



1x COB LED max3500lm 3000k



A A+ A++

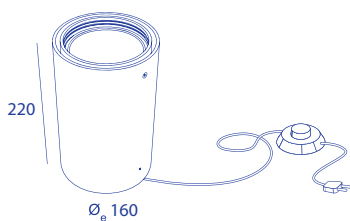

NON DIMMABLE

WH	24° 30W	BB9701A CL30_24 NW
BLK	24° 30W	BB9702A CL30_24 NW

ALTERNATIVE LIGHT COLOUR

WARM WHITE	2700K
NEUTRAL WHITE	3000K
MEDIUM WHITE	3500K
COLD WHITE	4000K

REPLACE NW BY


WW
NW
MW
CW



1x QR111 ≤ 100W



C A A+ A++



WH
BLK

BB9701 |
BB9702 |


! 1,4m cabel + switch included



1x QR111 OPTILED max800lm 2800k



A A+ A++

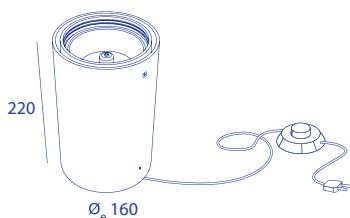

TRIAC DIMMABLE

WH	20° 11W	BB9701C OL8_20 WW
BLK	20° 11W	BB9702C OL8_20 WW

! 45° beam angle on request > ref=..._45





Private residence





Loft & Lys ApS

... løsninger med højt til loftet



Private residence
Photography: Mathias Lambrecht



Loft & Lys ApS

Værkstedsgården 9 ♦ DK-2620 Albertslund ♦ Denmark ♦ +45 6080 2973 ♦ www.loftlys.dk ♦ email: info@loftlys.dk



BB89102D CL7_30WW



FO99101B CL8_24WW




Small steamer ceiling

ceiling / surface mounted

1x CONE COB LED max700lm 2700k



A A⁺ A⁺⁺



NON DIMMABLE

WH	30°	7W	BB89101A CL7_30 WW
BLK	30°	7W	BB89102A CL7_30 WW

IGBT/TRIAC/1-10V DIMMABLE

WH	30°	7W	BB89101F CL7_30 WW
BLK	30°	7W	BB89102F CL7_30 WW

1-10V/PUSH DIMMABLE

WH	30°	7W	BB89101B CL7_30 WW
BLK	30°	7W	BB89102B CL7_30 WW

DALI DIMMABLE

WH	30°	7W	BB89101D CL7_30 WW
BLK	30°	7W	BB89102D CL7_30 WW

ALTERNATIVE LIGHT COLOUR

WARM WHITE	2700K
NEUTRAL WHITE	3000K

REPLACE WW BY


WW
NW



1x CONE COB LED max800lm 2700k



A A⁺ A⁺⁺



NON DIMMABLE

WH	24°	10W	FO99101A CL8_24 WW
BLK	24°	10W	FO99102A CL8_24 WW

1-10V/PUSH DIMMABLE

WH	24°	10W	FO99101B CL8_24 WW
BLK	24°	10W	FO99102B CL8_24 WW

HONEYCOMB D50

SQUARE OPTIC LENS
LINEAR SPREAD LENS

BS0298
BS0383
BS0384

ALTERNATIVE LIGHT COLOUR

WARM WHITE	2700K
NEUTRAL WHITE	3000K
COLD WHITE	4000K
DIM TO WARM	2200K-3000K

REPLACE WW BY

WW
NW
CW
DW



! 15° or 38° or 60° beam angle on request > ref=..._15 or ..._38 or..._60






Small steamer ceiling

ceiling / surface mounted

1x COB LED max1500lm 3000k



A A+ A++



NON DIMMABLE

WH	[30°]	11W	BB99131A CL12_30 NW
BLK	[30°]	11W	BB99132A CL12_30 NW

IGBT/TRIAC DIMMABLE

WH	[30°]	11W	BB99131C CL12_30 NW
BLK	[30°]	11W	BB99132C CL12_30 NW

DALI DIMMABLE

WH	[30°]	11W	BB99131D CL12_30 NW
BLK	[30°]	11W	BB99132D CL12_30 NW

HONEYCOMB D70

BS0297

ALTERNATIVE LIGHT COLOUR


WARM WHITE	2700K
NEUTRAL WHITE	3000K
MEDIUM WHITE	3500K
COLD WHITE	4000K
DIM TO WARM	2200K-3000K


REPLACE NW BY

WW
NW
MW
CW
DW



! 15° beam angle available on request > ref= ..._15

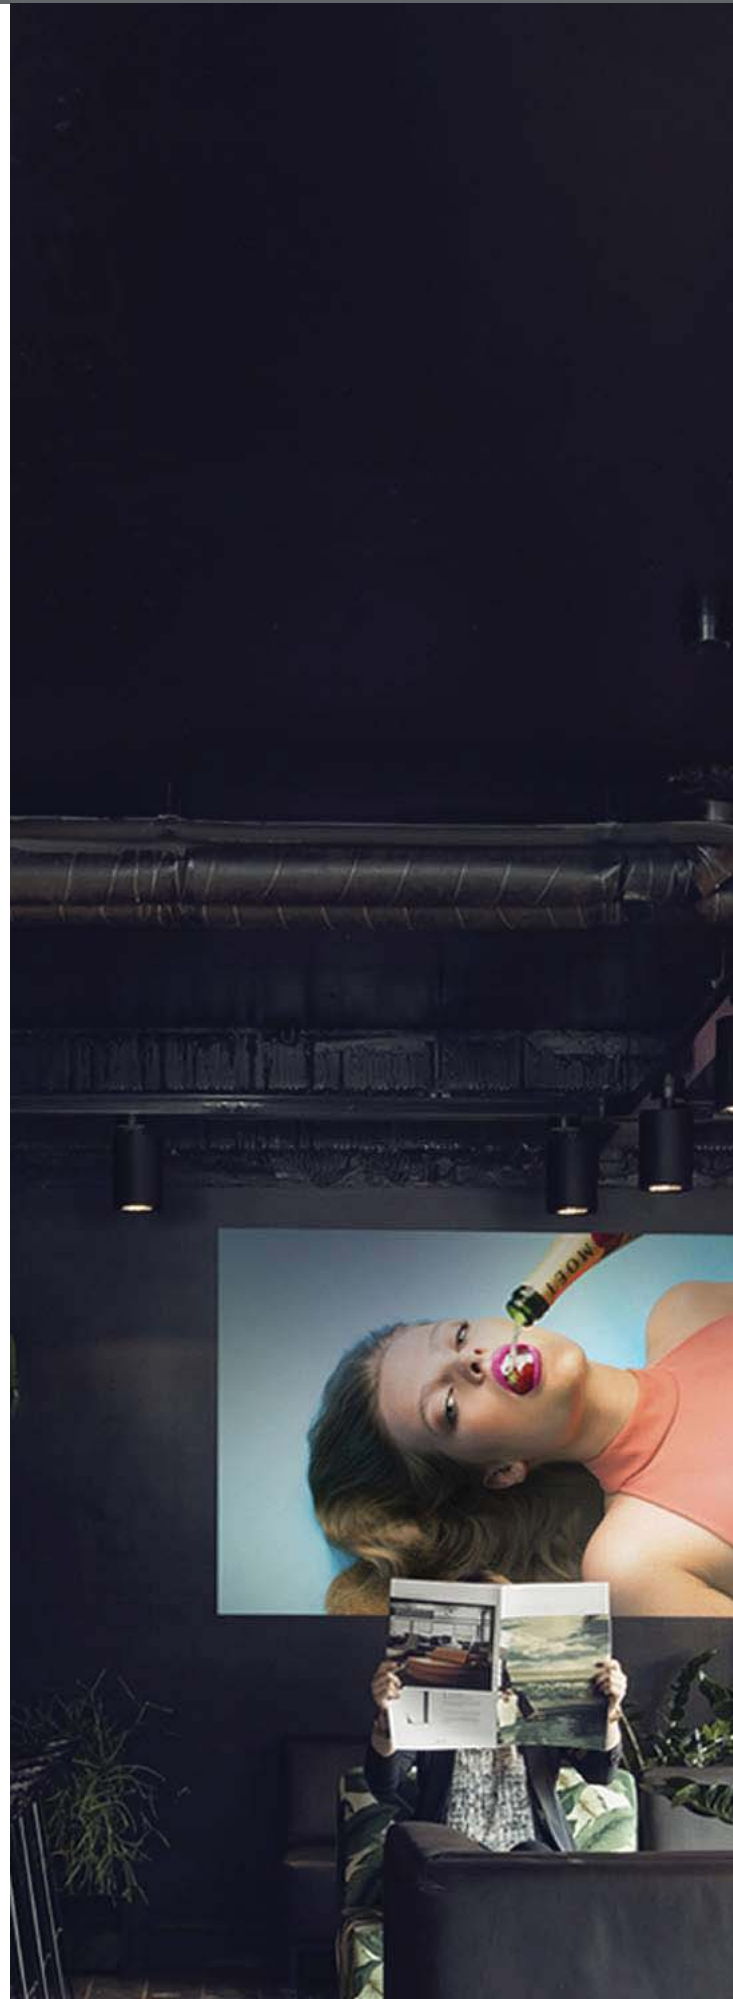

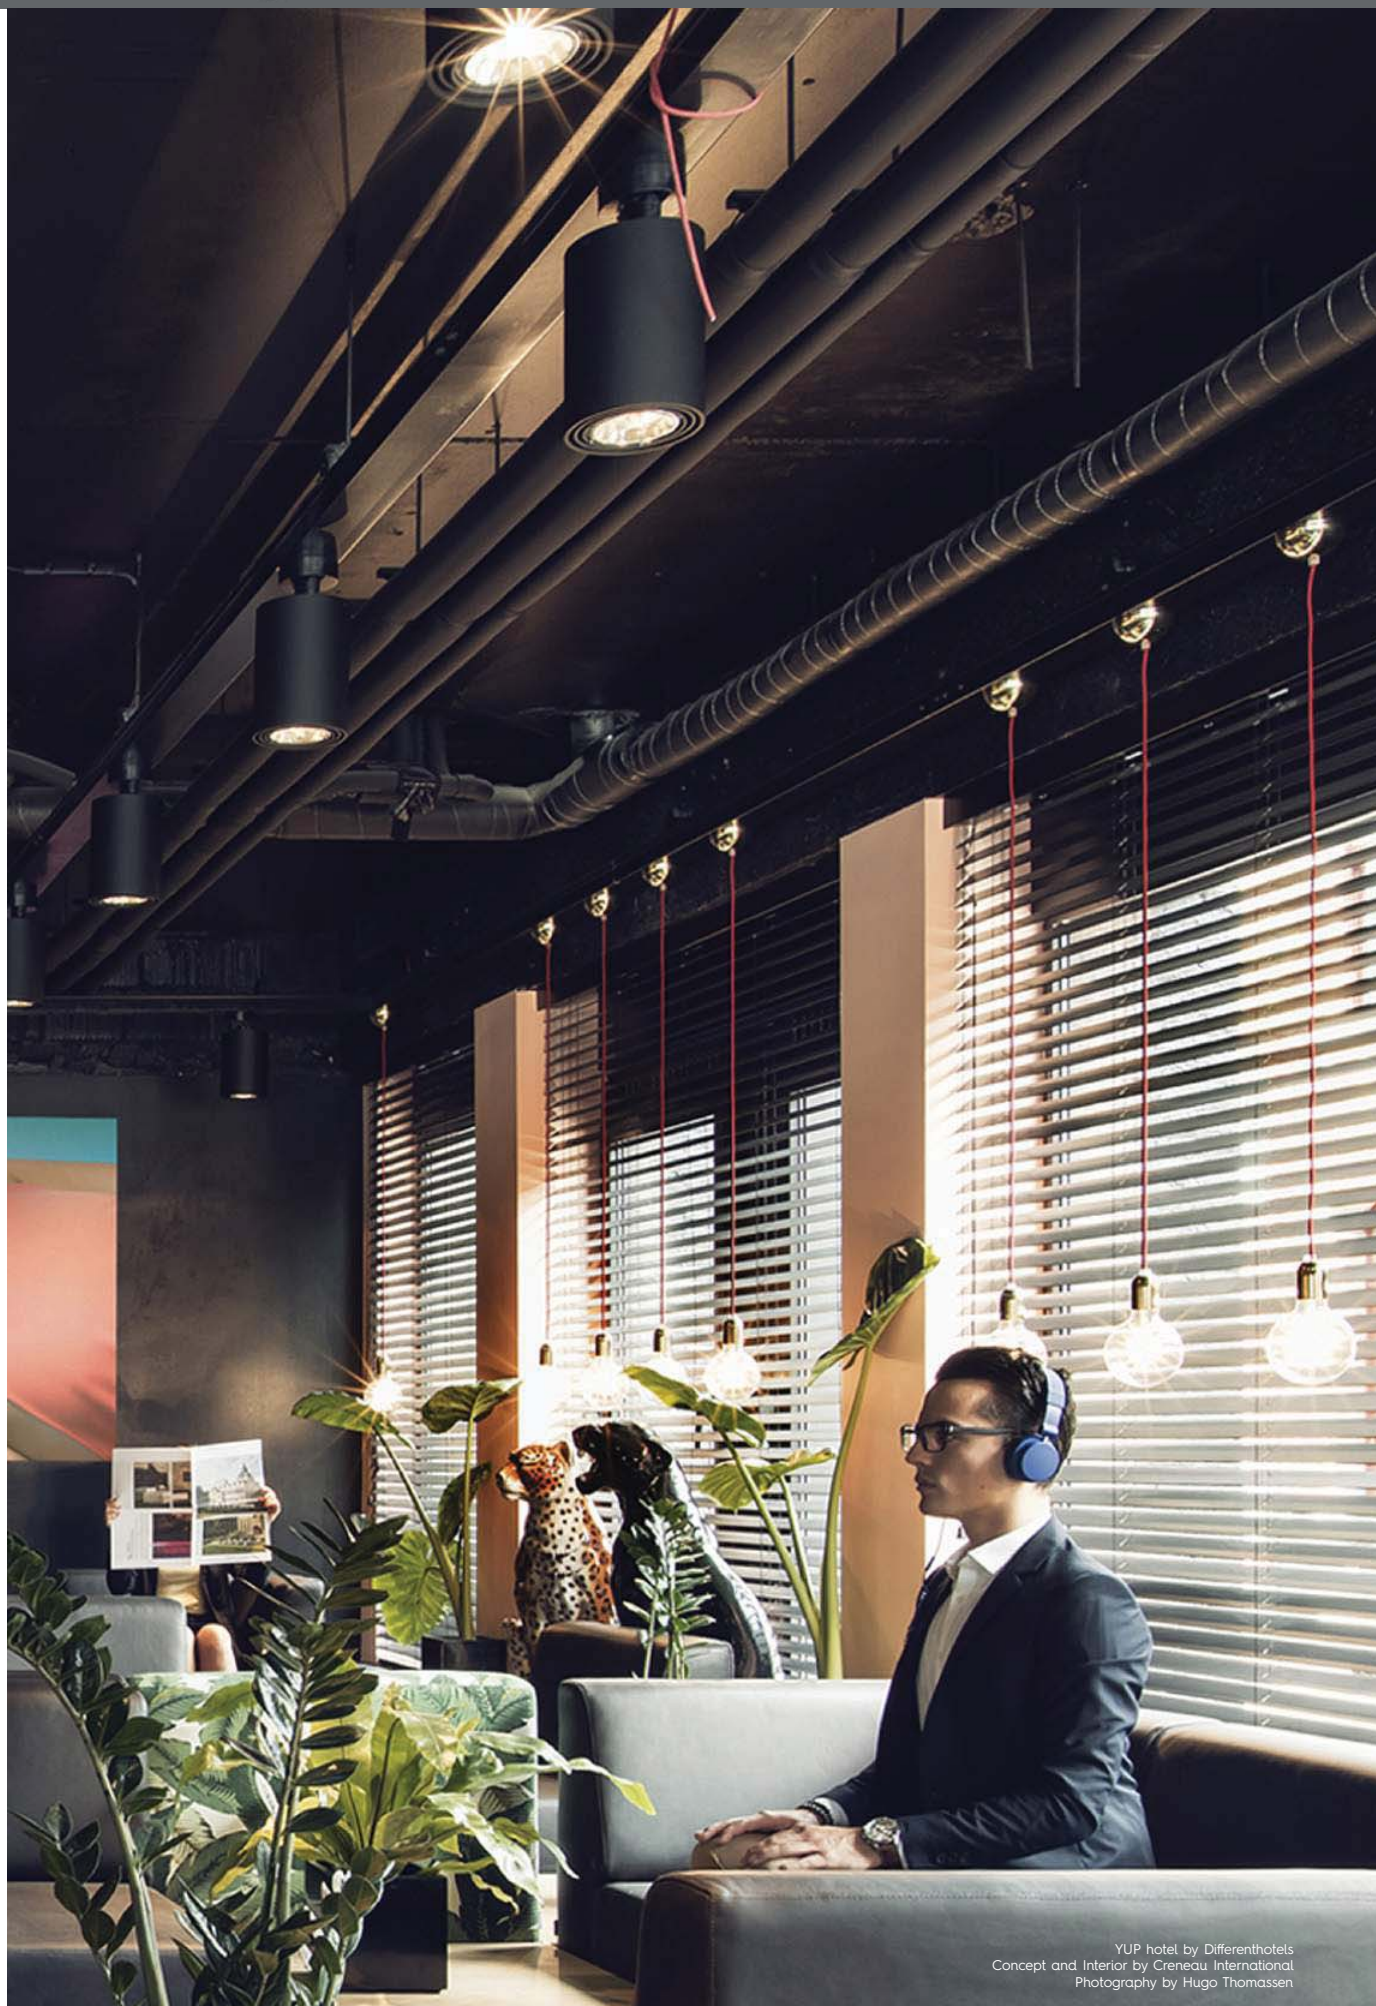

YUP hotel by Differenthotels
Concept and Interior by Creneau International
Photography by Hugo Thomassen






BB9102

Small steamer ceiling

ceiling / surface mounted



1x MR16 ≤ 50W




WH
BLK

BB9101 |
BB9102 |

! Can be combined with cone accessory



1x GU10 ≤ 50W / LED GU10 (max height 55mm)




WH
BLK

BB9121 |
BB9122 |

! Can be combined with cone accessory



1x QR70 ≤ 50W



WH
BLK

BB9111 |
BB9112 |






BB99531D CL20_24NW



Steamer ceiling

ceiling / surface mounted

1x COB LED max3500lm 3000k



NON DIMMABLE

WH	[24°]	30W	BB99531A CL30_24 NW
BLK	[24°]	30W	BB99532A CL30_24 NW

DALI DIMMABLE

WH	[24°]	30W	BB99531D CL30_24 NW
BLK	[24°]	30W	BB99532D CL30_24 NW

ALTERNATIVE LIGHT COLOUR


WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
MEDIUM WHITE	3500K	MW
COLD WHITE	4000K	CW
DIM TO WARM	2200K-3000K	DW

REPLACE NW BY



! 17° and 36° beam angles on request > ref= ..._17 or ..._36
! CRI 80+ available on request > change ref BB9... to BB8...
! COB specials on request (CrispWhite, food, ...)

1x QR111 OPTILED max800lm 2800k



IGBT/TRIAC DIMMABLE

WH	[20°]	12W	BB9501C OL8_20 WW
BLK	[20°]	12W	BB9502C OL8_20 WW


1-10V/PUSH/DALI DIMMABLE

WH	[20°]	12W	BB9501B OL8_20 WW
BLK	[20°]	12W	BB9502B OL8_20 WW

! 45° beam angle on request > ref=..._45



1x CONE COB LED max2400lm 3000k



NON DIMMABLE

WH	[24°]	18W	BB99531A CL20_24 NW
BLK	[24°]	18W	BB99532A CL20_24 NW

DALI DIMMABLE

WH	[24°]	18W	BB99531D CL20_24 NW
BLK	[24°]	18W	BB99532D CL20_24 NW

HONEYCOMB D76

BS0296

ALTERNATIVE LIGHT COLOUR

WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
MEDIUM WHITE	3500K	MW
COLD WHITE	4000K	CW
DIM TO WARM	2200K-3000K	DW

REPLACE NW BY



! 40° beam angle on request > ref= ..._40
! CRI 80+ available on request > change ref BB9...to BB8...
! COB specials on request (CrispWhite, food, ...)





A. Suivre
Concept Design Office ABC-Plan ID
Photography by Evgeniy Abrosimov






BB9502

Steamer ceiling

ceiling / surface mounted

1x QRIII ≤ 100W

C A A+ A++



WH
BLK

! Can be combined with cone accessory

BB9501 |
BB9502 |





FO99302B CL8_24WW



FO99301B CL8_24WW




Small steamer suspension

ceiling / suspension

1x CONE COB LED max800lm 2700k



A A+ A++



NON DIMMABLE

WH	24°	10W	FO99301A CL8_24 WW
BLK	24°	10W	FO99302A CL8_24 WW

1-10V/PUSH DIMMABLE

WH	24°	10W	FO99301B CL8_24 WW
BLK	24°	10W	FO99302B CL8_24 WW

HONEYCOMB D50	BS0298
SQUARE OPTIC LENS	BS0383
LINEAR SPREAD LENS	BS0384

ALTERNATIVE LIGHT COLOUR

WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
COLD WHITE	4000K	CW
DIM TO WARM	2200K-3000K	DW

! 15° or 38° or 60° beam angle on request > ref=..._15 or ..._38
or...._60
! DALI dimmable on request


REPLACE WW BY



1x CONE COB LED max700lm 2700k



A A+ A++



NON DIMMABLE

WH	30°	7W	BB89301A CL7_30 WW
BLK	30°	7W	BB89302A CL7_30 WW

IGBT/TRIAC/1-10V DIMMABLE

WH	30°	7W	BB89301F CL7_30 WW
BLK	30°	7W	BB89302F CL7_30 WW

1-10V/PUSH DIMMABLE

WH	30°	7W	BB89301B CL7_30 WW
BLK	30°	7W	BB89302B CL7_30 WW

DALI DIMMABLE

WH	30°	7W	BB89301D CL7_30 WW
BLK	30°	7W	BB89302D CL7_30 WW

ALTERNATIVE LIGHT COLOUR

WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW

REPLACE WW BY





Utrecht University Restaurant
Puur Interieur Architecten
Photography by Liesbet Goetschalckx


Small steamer suspension

ceiling / suspension

1x COB LED max1500lm 3000k



A A⁺ A⁺⁺



NON DIMMABLE

WH	30°	12W	BB99301A CL12_30 NW
BLK	30°	12W	BB99302A CL12_30 NW

IGBT/TRIAC DIMMABLE

WH	30°	12W	BB99301C CL12_30 NW
BLK	30°	12W	BB99302C CL12_30 NW

HONEYCOMB D70 BS0297

ALTERNATIVE LIGHT COLOUR

WARM WHITE	2700K
NEUTRAL WHITE	3000K
MEDIUM WHITE	3500K
COLD WHITE	4000K
DIM TO WARM	2200K-3000K

REPLACE NW BY

WW
NW
MW
CW
DW

CRI 90+	SDCM < 3	SO 1080lm
T	DLI	III
0.5m	11 kg	passive
LM80 50000	5 YEAR WARRANTY	

! 15° beam angle on request > ref=...15
! 10° narrow spot optical lens on request






BB9302



Small steamer suspension

ceiling / suspension

1x QR70 ≤ 50W




WH
BLK

BB9311 |
BB9312 |



1x MR16 ≤ 50W




WH
BLK

BB9301 |
BB9302 |

! Can be combined with cone accessory



1x GU10 ≤ 50W / LED GU10 (max height 55mm)



WH
BLK

BB9321 |
BB9322 |

! Can be combined with cone accessory





BB99831D CL20_24NW

Steamer suspension


ceiling / suspension



1x QR111 OPTILED max800lm 2800k



A A+ A++



IGBT/TRIAC DIMMABLE

WH	[24°]	12W	BB9801C OL8_20 WW
BLK	[20°]	12W	BB9802C OL8_20 WW

1-10V/PUSH/DALI DIMMABLE

WH	[20°]	12W	BB9801B OL8_20 WW
BLK	[20°]	12W	BB9802B OL8_20 WW


! 45° beam angle on request > ref=..._45



1x COB LED max3500lm 3000k



A A+ A++



NON DIMMABLE

WH	[24°]	30W	BB99831A CL30_24 NW
BLK	[24°]	30W	BB99832A CL30_24 NW

DALI DIMMABLE

WH	[24°]	30W	BB99831D CL30_24 NW
BLK	[24°]	30W	BB99832D CL30_24 NW

ALTERNATIVE LIGHT COLOUR

WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
MEDIUM WHITE	3500K	MW
COLD WHITE	4000K	CW
DIM TO WARM	2200K-3000K	DW

REPLACE NW BY


! 17° and 36° beam angles on request > ref= ..._17 or ..._36
! CRI 80+ available on request > change ref BB9... to BB8...
! COB specials on request (CrispWhite, food, ...)



1x CONE COB LED max2400lm 3000k



A A+ A++



NON DIMMABLE

WH	[24°]	18W	BB99831A CL20_24 NW
BLK	[24°]	18W	BB99832A CL20_24 NW

DALI DIMMABLE

WH	[24°]	18W	BB99831D CL20_24 NW
BLK	[24°]	18W	BB99832D CL20_24 NW

HONEYCOMB D76 BS0296

ALTERNATIVE LIGHT COLOUR

WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
MEDIUM WHITE	3500K	MW
COLD WHITE	4000K	CW
DIM TO WARM	2200K-3000K	DW

REPLACE NW BY


! 40° beam angle on request > ref= ..._40
! CRI 80+ available on request > change ref BB9... to BB8...
! COB specials on request (CrispWhite, food, ...)



1x QR111 ≤ 100W



C A A+ A++



WH		BB9801
BLK		BB9802

! Can be combined with cone accessory





Loft & Lys ApS

... løsninger med højt til loftet



Down 2 earth capital office
Antwerpen
Photography: Liesbet Goetschalckx



Loft & Lys ApS

Værkstedsgården 9 ♦ DK-2620 Albertslund ♦ Denmark ♦ +45 6080 2973 ♦ www.loftlys.dk ♦ email: info@loftlys.dk



FO99202D CL8_24WW



FO99201D CL8_24WW



1x **COB LED** max1500lm 3000k



A A+ A++



NON DIMMABLE

WH	30°	11W	BB99201A CL12_30 NW
BLK	30°	11W	BB99202A CL12_30 NW

DALI DIMMABLE

WH	30°	11W	BB99201D CL12_30 NW
BLK	30°	11W	BB99202D CL12_30 NW

HONEYCOMB D70 BS0297

ALTERNATIVE LIGHT COLOUR REPLACE NW BY

WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
MEDIUM WHITE	3500K	MW
COLD WHITE	4000K	CW
DIM TO WARM	2200K-3000K	DW

! 15° beam angle on request > ref= ...15

! DALI version can only be used in combination with DALI track system on p.342




Small steamer adaptor track

1x **CONE COB LED** max800lm 2700k



A A+ A++



NON DIMMABLE

WH	24°	10W	FO99201A CL8_24 WW
BLK	24°	10W	FO99202A CL8_24 WW

DALI DIMMABLE

WH	24°	10W	FO99201D CL8_24 WW
BLK	24°	10W	FO99202D CL8_24 WW

HONEYCOMB D50 BS0298
SQUARE OPTIC LENS BS0383
LINEAR SPREAD LENS BS0384

ALTERNATIVE LIGHT COLOUR REPLACE WW BY

WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
COLD WHITE	4000K	CW
DIM TO WARM	2200K-3000K	DW

! 15° or 38° or 60° beam angle on request > ref=...15 or ...38 or...60

! DALI version can only be used in combination with DALI track system on p.342





YUP hotel by Differenthotels
Concept and Interior By Caneau International
Photography By Hugo Thomassen






Small steamer adaptor track

1x MR16 ≤ 50W / LED MR16 12V

C A A+ A++



WH
BLK


BB9201 |
BB9202 |

! Can be combined with cone accessory



1x CONE COB LED max700lm 2700k

A A+ A++



NON DIMMABLE

WH	30°	7W		BB89201A CL7_30 WW
BLK	30°	7W		BB89202A CL7_30 WW

DALI DIMMABLE

WH	30°	7W		BB89201D CL7_30 WW
BLK	30°	7W		BB89202D CL7_30 WW

ALTERNATIVE LIGHT COLOUR

WARM WHITE	2700K
NEUTRAL WHITE	3000K

REPLACE WW BY

WW
NW

! DALI version can only be used in combination with DALI track system on p.342



1x QR70 ≤ 50W

C




WH
BLK

BB9211 |
BB9212 |



1x GU10 ≤ 50W / LED GU10 (max height 55mm)

C A A+ A++



WH
BLK

BB9221 |
BB9222 |

! Can be combined with cone accessory






BB99631D CL20_24NW

Steamer adaptor

track



1x CONE COB LED max2400lm 3000k



NON DIMMABLE

WH	[24°]	18W	BB99631A CL20_24 NW
BLK	[24°]	18W	BB99632A CL20_24 NW

DALI DIMMABLE

WH	[24°]	18W	BB99631D CL20_24 NW
BLK	[24°]	18W	BB99632D CL20_24 NW

HONEYCOMB D76 BS0296

ALTERNATIVE LIGHT COLOUR REPLACE NW BY

WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
MEDIUM WHITE	3500K	MW
COLD WHITE	4000K	CW
DIM TO WARM	2200K-3000K	DW

! 40° beam angle on request > ref= ...40

! CRI 80+ available on request > change ref BB9...to BB8...

! COB specials on request (CrispWhite, food, ...)

! DALI version can only be used in combination with DALI track system on p.342



1x COB LED max3500lm 3000k



NON DIMMABLE

WH	[24°]	26W	BB99631A CL30_24 NW
BLK	[24°]	26W	BB99632A CL30_24 NW

DALI DIMMABLE

WH	[24°]	26W	BB99631D CL30_24 NW
BLK	[24°]	26W	BB99632D CL30_24 NW

ALTERNATIVE LIGHT COLOUR REPLACE NW BY

WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
MEDIUM WHITE	3500K	MW
COLD WHITE	4000K	CW
DIM TO WARM	2200K-3000K	DW

! 17° and 36° beam angle on request > ref= ...17 or ...36

! CRI 80+ available on request > change ref BB9...to BB8...

! COB specials on request (CrispWhite, food, ...)

! DALI version can only be used in combination with DALI track system on p.342






Steamer adaptor track

1x QRIII OPTILED max800lm 2800k



A A+ A++



IGBT/TRIAC DIMMABLE

WH	20° 12W	BB89601C OL8_20 WW
BLK	20° 12W	BB89602C OL8_20 WW

DALI DIMMABLE

WH	20° 12W	BB89601D OL8_20 WW
BLK	20° 12W	BB89602D OL8_20 WW


! 45° beam angle on request > ref= ..._45
! DALI version can only be used in combination with DALI track system on p.342



1x QRIII ≤ 100W



C A A+ A++



WH		BB9601
BLK		BB9602

! Can be combined with cone accessory





