


Installations- / EDB gulv
Linoleum - træ

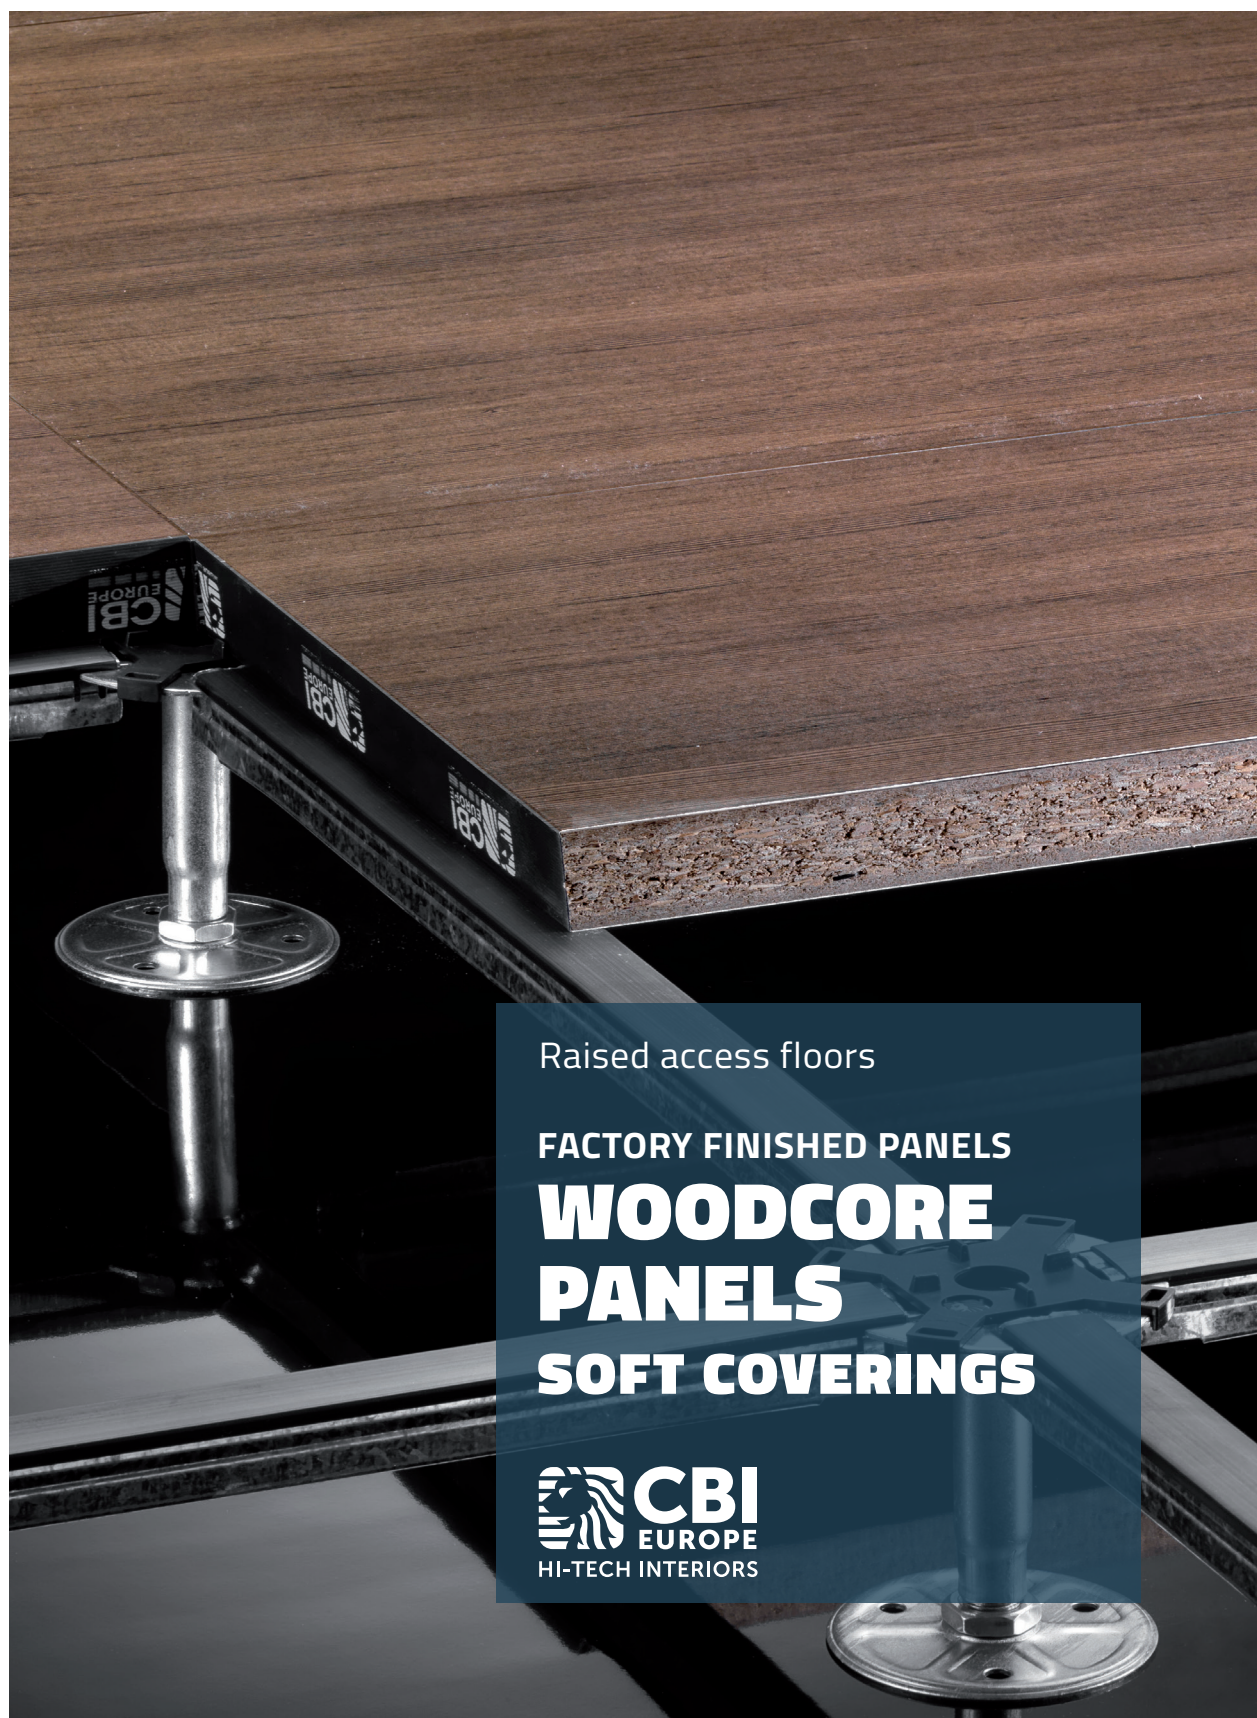

Raised access floors

FACTORY FINISHED PANELS

**WOODCORE
PANELS**

SOFT COVERINGS

 **CBI**
EUROPE
HI-TECH INTERIORS

Installations- / EDB gulv

Linoleum- træ

PANELS

WOODCORE PANELS


ALUFOIL BACKING / SOFT COVERINGS

woodcore high density 600 x 600 mm
alufoil backing 0.05 mm

PT30
ALUFOIL BACKING
S-P-03623 EPD®
environdec.com



PT38
ALUFOIL BACKING
S-P-03624 EPD®
environdec.com

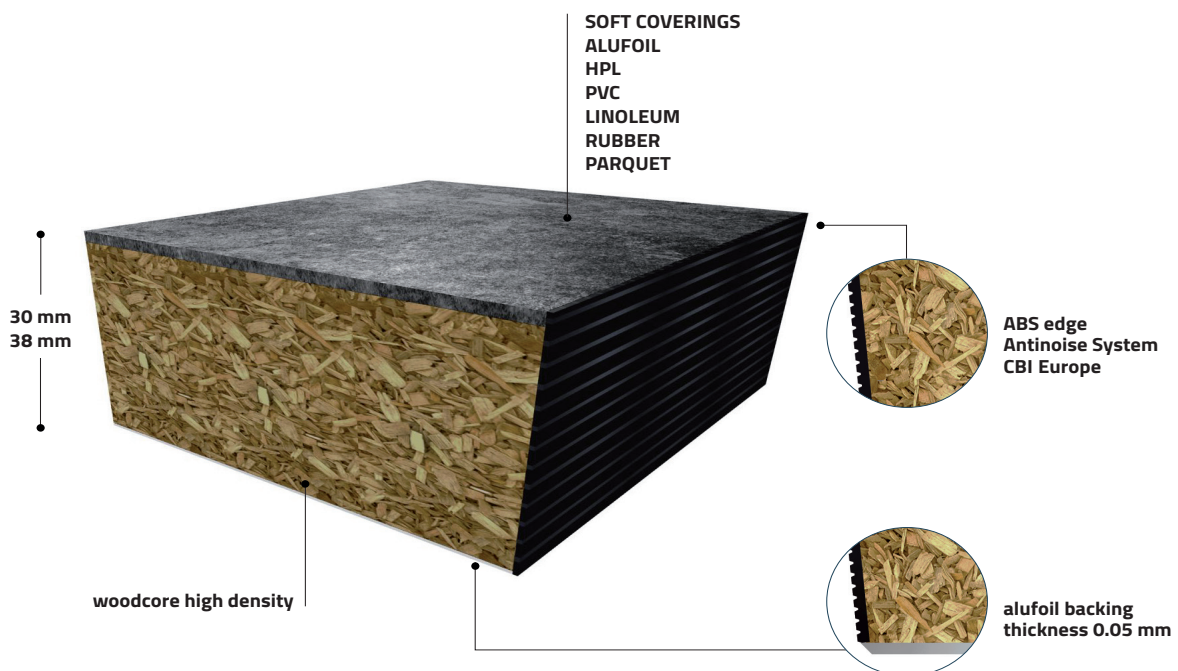

TECHNICAL SPECIFICATIONS	PT30 h 30 mm / kg 7,60	PT38 h 38 mm / kg 10,00
--------------------------	---------------------------	----------------------------

fire reaction UNI EN 13501-1	Bfl-s1	
fire resistance UNI EN 13501-2	REI 30	

TECHNICAL FEATURES UNI EN 12825

CBI/ST 	center of panel - deflection 2,5 mm	3,2 > 4,0 KN
	center of panel - ultimate load	9,0 > 11,5 KN
	loading class	4 > 5
CBI/CR 	center of panel - deflection 2,5 mm	3,3 > 4,2 KN
	center of panel - ultimate load	9,5 > 12,0 KN
	loading class	4 > 6
IF tubular 	center of panel - deflection 2,5 mm	3,5 > 4,4 KN
	center of panel - ultimate load	10,0 > 12,6 KN
	loading class	5 > 6

The load resistance tests have been performed in CBI Europe's internal laboratory and simulate the test method indicated by UNI EN 12825: 2001. The results obtained at a height of 20 cm may vary depending on the installation and the general conditions of the site. If the project requires a certification from a third party this must be explicitly requested.



Installations- / EDB gulv

Linoleum - træ

PANELS


WOODCORE PANELS




GALVANIZED STEEL DISH / SOFT COVERINGS

woodcore high density 600 x 600 mm
galvanized steel 0.5 mm

PT30V
GALVANIZED STEEL DISH
S-P-03265 EPD®
environdec.com

PT38V
GALVANIZED STEEL DISH
S-P-03626 EPD®
environdec.com

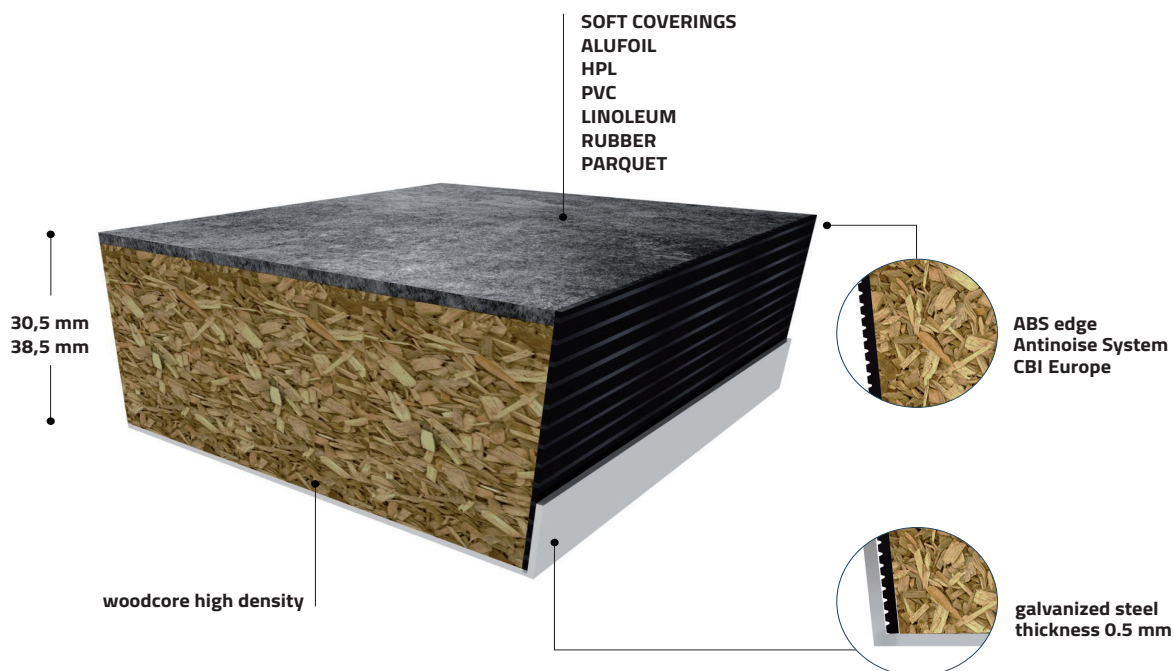

TECHNICAL SPECIFICATIONS		PT30V h 30,5 mm / kg 9,00	PT38V h 38,5 mm / kg 11,50
fire reaction UNI EN 13501-1			Bfl-s1
fire resistance UNI EN 13501-2			REI 30
TECHNICAL FEATURES UNI EN 12825			
CBI/ST 	center of panel - deflection 2,5 mm		3,5 > 5,5 KN
	center of panel - ultimate load		10,6 > 14,5 KN
	loading class		5 > 6
CBI/CR 	center of panel - deflection 2,5 mm		3,6 > 5,8 KN
	center of panel - ultimate load		11,2 > 15,2 KN
	loading class		5 > 6
IF tubular 	center of panel - deflection 2,5 mm		3,9 > 6,1 KN
	center of panel - ultimate load		11,8 > 16,0 KN
	loading class		5 > 6


The load resistance tests have been performed in CBI Europe's internal laboratory and simulate the test method indicated by UNI EN 12825: 2001. The results obtained at a height of 20 cm may vary depending on the installation and the general conditions of the site. If the project requires a certification from a third party this must be explicitly requested.



Installations- / EDB gulv Linoleum- træ

STRUCTURES

FLOOR SYSTEM **CBI/ST** without stringers

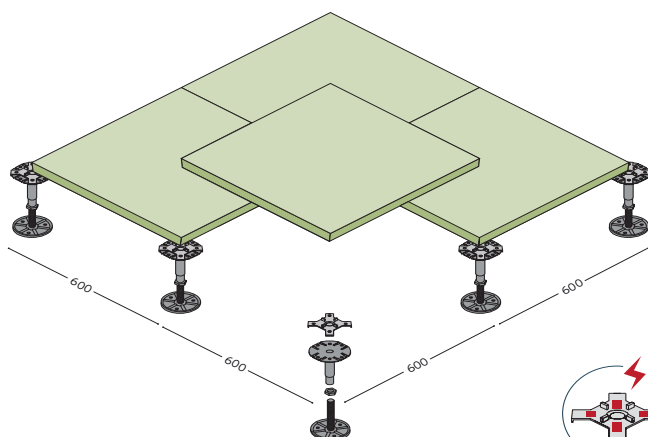

ON REQUEST
conductive washer
HGT 300/C.1

adjustable pedestal

CBI F12

code	height/mm	weight/pcs
CBIO3F12	45/65	0,23 Kg
CBIO4F12	61/90	0,24 Kg
CBIO5F12	83/130	0,27 Kg
CBIO6F12	120/200	0,30 Kg


ø 21 mm
ø 12 mm
ø 90 mm

CBI F16

code	height/mm	weight/pcs
CBIO3F16	45/65	0,30 Kg
CBIO4F16	61/90	0,34 Kg
CBIO5F16	83/130	0,39 Kg
CBIO6F16	120/200	0,45 Kg
CBIO7F16	170/290	0,55 Kg

ø 21 mm
ø 16 mm
ø 90 mm

FLOOR SYSTEM **CBI/ST** with stringers

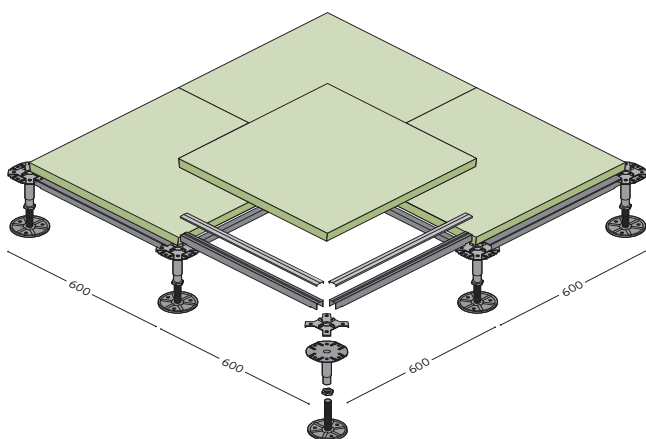

ON REQUEST
conductive washer
HGT 300/C.1

adjustable pedestal

CBI F12

code	height/mm	weight/pcs
CBIO3F12	45/65	0,23 Kg
CBIO4F12	61/90	0,24 Kg
CBIO5F12	83/130	0,27 Kg
CBIO6F12	120/200	0,30 Kg


ø 21 mm
ø 12 mm
ø 90 mm

CBI F16


code	height/mm	weight/pcs
CBIO3F16	45/65	0,30 Kg
CBIO4F16	61/90	0,34 Kg
CBIO5F16	83/130	0,39 Kg
CBIO6F16	120/200	0,45 Kg
CBIO7F16	170/290	0,55 Kg
CBIO8F16	250/390	0,70 Kg
CBIO9F16	350/490	0,83 Kg
CBIO10F16	450/650	1,00 Kg

ø 21 mm
ø 16 mm
ø 90 mm


T536/A HEAVY



T536/L LIGHT



T536/S SPACER



stringers

open section stringer made with galvanised steel,
Clip-On System with PVC washer.


T536/A 30 x 25 x 1 mm
T536/L 30 x 25 x 0,7 mm
T536/S 20 x 25 x 0,7 mm




Installations- / EDB gulv Linoleum - træ

STRUCTURES


FLOOR SYSTEM CR

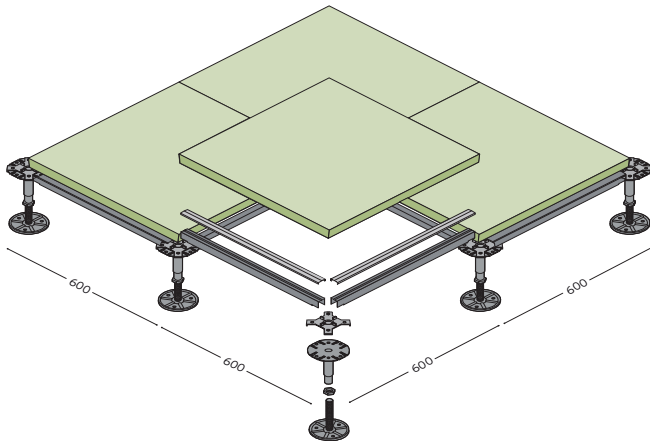


T536/A HEAVY



T536/L LIGHT




TT535



ON REQUEST
conductive washer
HGT 300/C.1

adjustable pedestal

CR




code	height/mm	weight/pcs
CR00F16	120/200	0,55 Kg
CR01F16	200/350	0,68 Kg
CR02F16	350/550	0,94 Kg
CR03F18	550/800	1,34 Kg
CR04F20	800/1050	1,85 Kg
CR05F20	1050/1300	2,14 Kg

stringers


open section stringer made with galvanised steel,
Clip-On / Screw Down System with PVC washer.

T536/A 30 x 25 x thk sp. 1 mm
T536/L 30 x 25 x thk sp. 0,7 mm
TT535 20 x 30 x thk sp. 0,8 mm

FLOOR SYSTEM IF

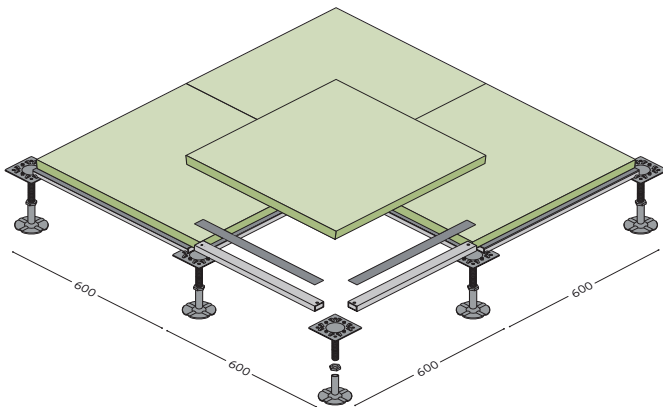


TT535



adjustable pedestal

IF



code	height/mm	weight/pcs
IF1622	160/220	0,70 Kg
IF2128	210/280	0,75 Kg
IF2734	270/340	0,80 Kg
IF3339	330/390	0,85 Kg
IF3844	380/440	0,90 Kg
IF4349	430/490	0,95 Kg
IF4854	480/540	1,00 Kg
IF5359	530/590	1,05 Kg
IF5873	580/730	1,25 Kg
IF7287	720/870	1,40 Kg
IF8699	860/990	1,70 Kg

stringers

open section stringer made with galvanised steel,
Screw Down System with PVC washer.

TT536 20 x 30 x thk sp. 1 mm

Installations- / EDB gulv

Linoleum- træ

FINISHES

ANTISTATIC HPL _ STANDARD

available sizes: 600 x 600 mm




577 grey




576 ivory



1666 beech

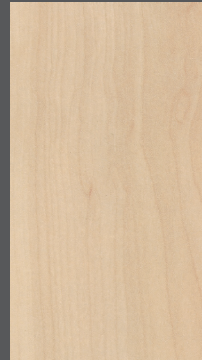

1611 maple

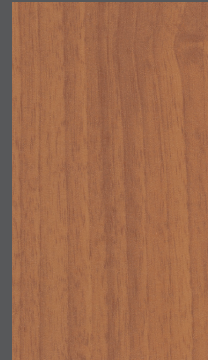

1329 doussié




650 oak texas



2810 cement



616 walnut sabec

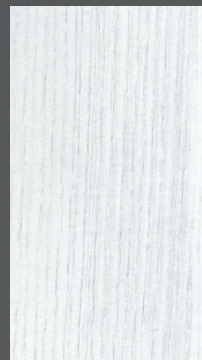


1385 ash white




1661 oak



671 rustic beech

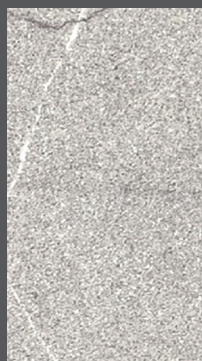

548 rocks piacentina

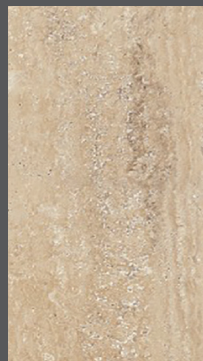

546 rocks tivoli

Other types of antistatic HPL available on request. The standard coverings used are all original Abet Walkprint finishing type SEI.

CBI EUROPE > RAISED ACCESS FLOORS > FACTORY FINISHED PANELS > WOODCORE PANELS > SOFT COVERINGS

01 / 2020



Loft & Lys ApS
www.loftlys.dk


Installations- / EDB gulv

Linoleum - træ

FINISHES

ANTISTATIC PVC - MIPOLAM CLASSIC

available sizes: 600 x 600 mm thickness: 2,0 mm



0003 ivory



0010 azure



0120 borneo



0108 pepper




0002 platinum

DISSIPATIVE FLOORING - MIPOLAM ROBUST EL7 STATIC

available sizes: 600 x 600 mm thickness: 2 mm




0002 platinum




0003 ivory




0005 steel



0013 pewter



0112 storm




0306 green

CONDUCTIVE PVC - MIPOLAM TECHNIC EL5


available sizes: 600 x 600 mm thickness: 0,9 mm




0635 white



0636 grey




0637 light blue



0638 blue



0639 green



0640 beige


Installations- / EDB gulv

Linoleum- træ


FINISHES

LINOLEUM

available sizes: 600 x 600 x 2,0 / 2,5 / 3,2 mm




amber




applegreen



begonia




camel




charcoal




coral



corn




durango



granata




graphite




grass




hyacinth




mint




navy




ocean



pale pink




pebble



salmon




silk




storm




terracotta



tiger eye



willow green



white

The linoleum tiles used from CBI Europe are all original Tarkett. Other types of linoleum, available on request

CBI EUROPE > RAISED ACCESS FLOORS > FACTORY FINISHED PANELS > WOODCORE PANELS > SOFT COVERINGS

01 / 2020



Loft & Lys ApS
www.loftlys.dk