


Installations- / EDB gulv
Fuldindkapslet i stål - calciumsulfat

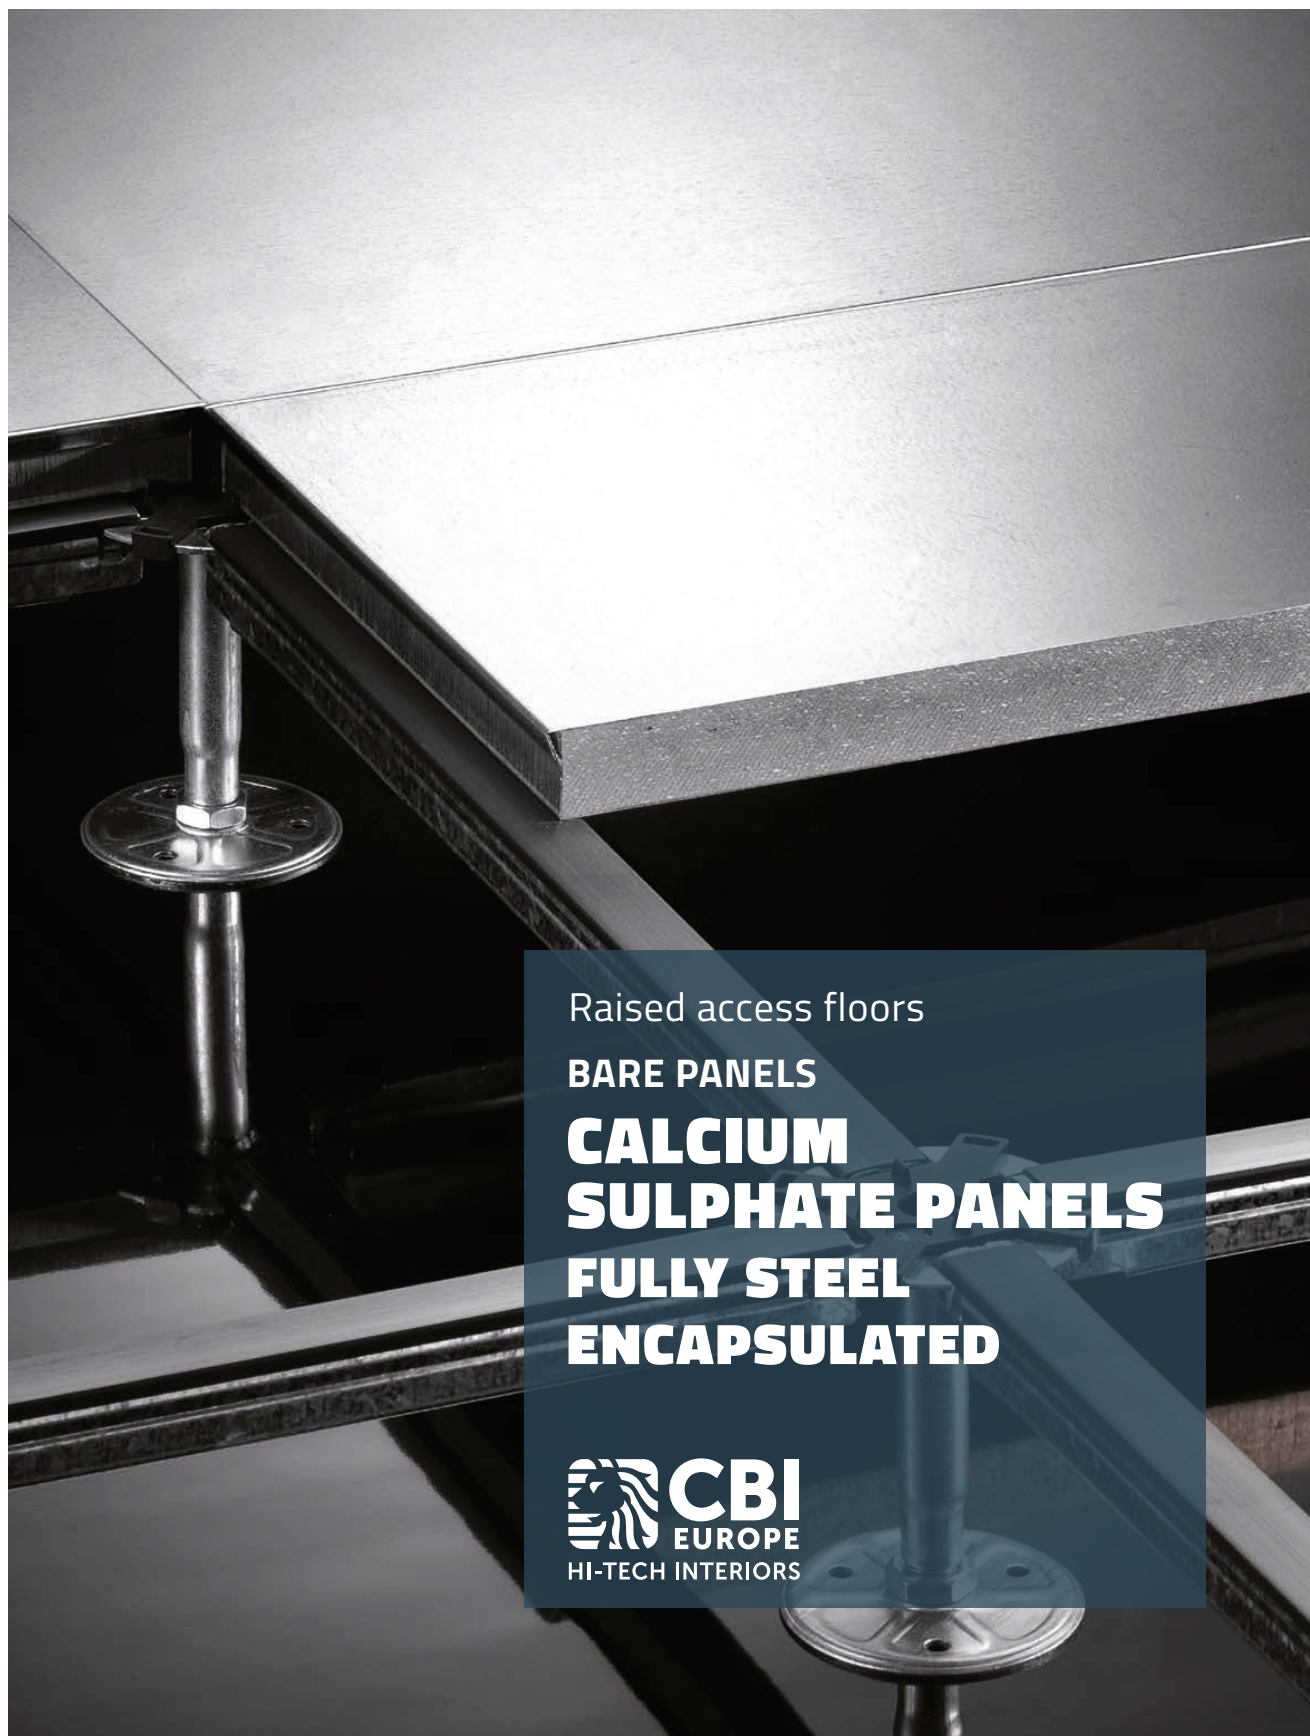

Raised access floors

BARE PANELS

**CALCIUM
SULPHATE PANELS**

**FULLY STEEL
ENCAPSULATED**



Installations- / EDB gulv

Fuldindkapslet i stål - calciumsulfat

PANELS

CALCIUM SULPHATE PANELS

FULLY STEEL ENCAPSULATED

calcium sulphate 600 x 600 mm
galvanized steel 0.5 mm
covering: lay-loose tiles (carpet, pvc, rubber)



REI 60

S-P-02180 EPD®
environdec.com



TECHNICAL SPECIFICATIONS	CBL1/S h 23 mm / kg 12,50	CBM/S h 28 mm / kg 14,65	CBH/S h 31 mm / kg 15,50
fire reaction UNI EN 13501-1	A1		
fire resistance UNI EN 13501-2	> REI 60 <		
TECHNICAL FEATURES UNI EN 12825			
CBI/ST 	center of panel - deflection 2,5 mm	3,5 > 5,5 KN	
	center of panel - ultimate load	10,6 > 14,5 KN	
	loading class	5 > 6	
CBI/CR 	center of panel - deflection 2,5 mm	3,6 > 5,8 KN	
	center of panel - ultimate load	11,2 > 15,2 KN	
	loading class	5 > 6	
IF tubolar 	center of panel - deflection 2,5 mm	3,9 > 6,1 KN	
	center of panel - ultimate load	11,8 > 16,0 KN	
	loading class	5 > 6	


The load resistance tests have been performed in CBI Europe's internal laboratory and simulate the test method indicated by UNI EN 12825: 2001. The results obtained at a height of 20 cm may vary depending on the installation and the general conditions of the site. If the project requires a certification from a third party this must be explicitly requested.



Installations- / EDB gulv Fuldindkapslet i stål - calciumsulfat


STRUCTURES

FLOOR SYSTEM **CBI/ST** without stringers

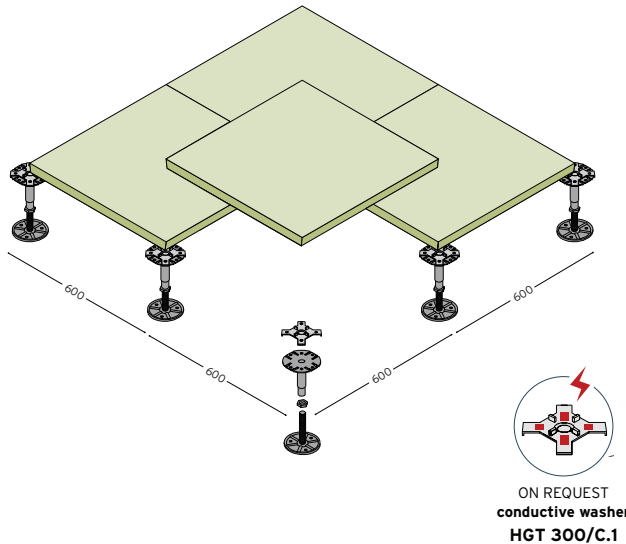


adjustable pedestal

CBI F12




code	height/mm	weight/pcs
CB103F12	45/65	0,23 Kg
CB104F12	61/90	0,24 Kg
CB105F12	83/130	0,27 Kg
CB106F12	120/200	0,30 Kg

CBI F16



code	height/mm	weight/pcs
CB103F16	45/65	0,30 Kg
CB104F16	61/90	0,34 Kg
CB105F16	83/130	0,39 Kg
CB106F16	120/200	0,45 Kg
CB107F16	170/290	0,55 Kg




FLOOR SYSTEM **CBI/ST** with stringers

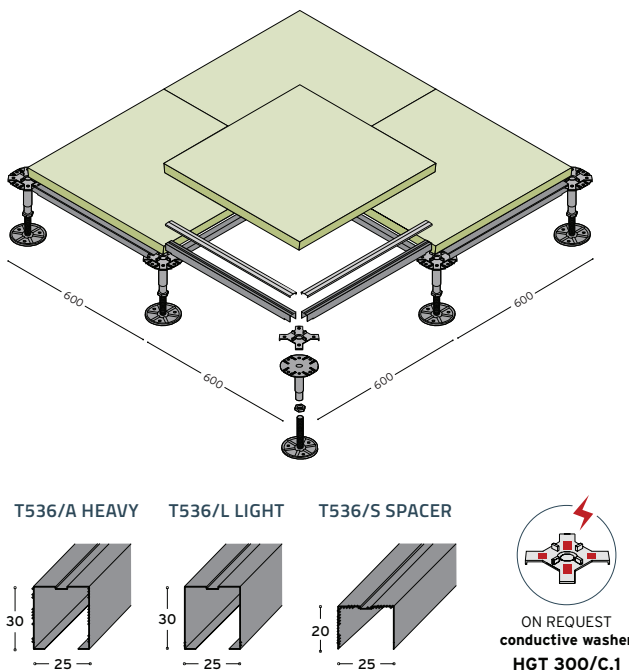

T536/A HEAVY

T536/L LIGHT

T536/S SPACER




adjustable pedestal

CBI F12



code	height/mm	weight/pcs
CB103F12	45/65	0,23 Kg
CB104F12	61/90	0,24 Kg
CB105F12	83/130	0,27 Kg
CB106F12	120/200	0,30 Kg

CBI F16



CB103F16	45/65	0,30 Kg
CB104F16	61/90	0,34 Kg
CB105F16	83/130	0,39 Kg
CB106F16	120/200	0,45 Kg
CB107F16	170/290	0,55 Kg
CB108F16	250/390	0,70 Kg
CB109F16	350/490	0,83 Kg
CB110F16	450/650	1,00 Kg

stringers


open section stringer made with galvanised steel, Clip-On System with PVC washer.

T536/A 30 x 25 x 1 mm
T536/L 30 x 25 x 0,7 mm
T536/S 20 x 25 x 0,7 mm


Installations- / EDB gulv Fuldindkapslet i stål - calciumsulfat

STRUCTURES


FLOOR SYSTEM CR

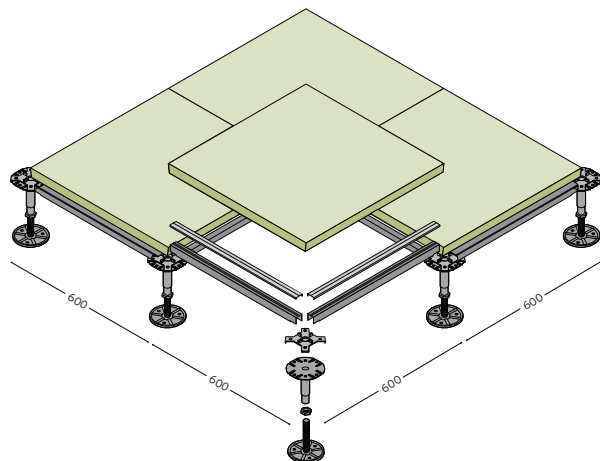


T536/A HEAVY



T536/L LIGHT




TT535



ON REQUEST
conductive washer
HGT 300/C.1

adjustable pedestal

CR




code	height/mm	weight/pcs
CR00F16	120/200	0,55 Kg
CR01F16	200/350	0,68 Kg
CR02F16	350/550	0,94 Kg
CR03F18	550/800	1,34 Kg
CR04F20	800/1050	1,85 Kg
CR05F20	1050/1300	2,14 Kg

stringers


open section stringer made with galvanised steel,
Clip-On / Screw Down System with PVC washer.

T536/A 30 x 25 x thk sp. 1 mm
T536/L 30 x 25 x thk sp. 0,7 mm
TT535 20 x 30 x thk sp. 0,8 mm

FLOOR SYSTEM IF

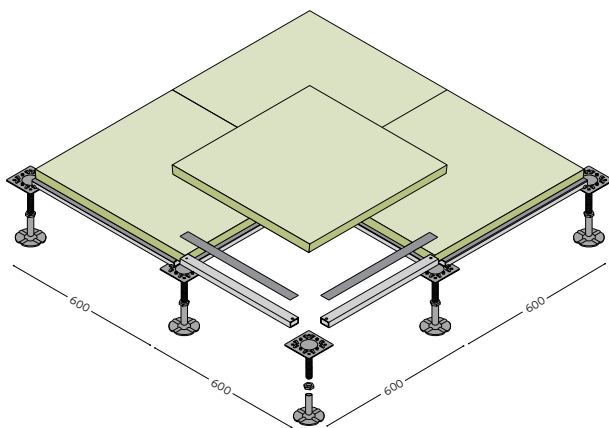


TT535



adjustable pedestal

IF



code	height/mm	weight/pcs
IF1622	160/220	0,70 Kg
IF2128	210/280	0,75 Kg
IF2734	270/340	0,80 Kg
IF3339	330/390	0,85 Kg
IF3844	380/440	0,90 Kg
IF4349	430/490	0,95 Kg
IF4854	480/540	1,00 Kg
IF5359	530/590	1,05 Kg
IF5873	580/730	1,25 Kg
IF7287	720/870	1,40 Kg
IF8699	860/990	1,70 Kg

stringers


open section stringer made with galvanised steel,
Screw Down System with PVC washer.

TT535 20 x 30 x thk sp. 1 mm

Installations- / EDB gulv Fuldindkapslet i stål - calciumsulfat


ACCESSORIES

RAMPS AND CONNECTION STEPS




R/RAC

*mdf, connection step with anti-slip black rubber



G/Gan

*mdf, connection step with anti-slip black rubber



extruded aluminium molding

A/ALL

● 436 grey

vertical upstand


FTN/12

○ 422 white ● 436 grey

● 421 black

*other ramp finishes available on request: HPL, PVC, linoleum


PERFORATED PANEL



AF1

AF2

perforated panel for ventilation



600 x 600 mm

AF1

holes \varnothing 8 mm $S=1.45$ dm² -20%


holes \varnothing 10 mm $S=2.26$ dm² -15%

AF2

holes \varnothing 8 mm $S=2.72$ dm² -20%

holes \varnothing 10 mm $S=4.27$ dm² -15%

ALUMINIUM VENTILATION GRID




GRS/150

GRS/300

GRS/600

aluminium ventilation grid with dumper for air regulation




GRS/150 600 x 150 mm

GRS/300 600 x 300 mm


GRS/600 600 x 600 mm

ELECTRICAL OUTLET BOX



TS/8

electrical outlet box




TS/8

electrical outlet box, 8 partitions

> available on request 16 modules version

PERIMETRAL GASKET FOR FIXING



X105

*perimetral gasket for fixing



X105/30 5x30 mm lenght 28 ml/rool


X105/40 5x40 mm lenght 28 ml/rool

*one-component polyuretane based foam available on request instead of the perimetral seal

Installations- / EDB gulv


Fuldindkapslet i stål - calciumsulfat

SKIRTING




BT/PVC
perimeter skirting

○ 422 white ● 436 grey
● 421 black




BT/PVC 60/80 x 5 x 3000 mm

SELF-ADHESIVE ALUMINIUM




SA/ALL
SA/ALL.1
self-adhesive aluminium tape
euro class A1 incombustible



SA/ALL/30 30 x length 50 ml/roll
SA/ALL/40 40 x length 50 ml/roll

MODULARITY

panel



The standard
600 x 600 mm
format effectively
optimises usage.

incidence

surface	panel	pedestal	stringer
25 m ²	3,3	4,0 pz/m ²	7,2 pz/m ²
50 m ²	3,3	3,5 pz/m ²	6,4 pz/m ²
100 m ²	3,3	3,3 pz/m ²	6,2 pz/m ²
200 m ²	3,3	3,2 pz/m ²	6,1 pz/m ²
400 m ²	3,3	3,2 pz/m ²	5,9 pz/m ²
1000 m ²	3,3	2,8 pz/m ²	5,6 pz/m ²

The average incidence is theoretic. It changes according to the dimension and shape of the space.

PACKAGING

pedestal

CBI12	height		CBI16	height		CR	height	
			CBI01F16	26/35 mm	80	CR00F16	120/200 mm	50
			CBI02F16	32/48 mm	80	CR01F16	200/350 mm	30
CBI03F12	45/65 mm	75	CBI03F16	45/65 mm	75	CR02F16	350/550 mm	30
CBI04F12	61/90 mm	60	CBI04F16	61/90 mm	60	CR03F18	550/800 mm	15
CBI05F12	83/130 mm	55	CBI05F16	83/130 mm	55	CR04F20	800/1050 mm	15
CBI06F12	120/200 mm	50	CBI06F16	120/200 mm	50	CR05F20	1050/1300 mm	10
CBI07F12	170/290 mm	40	CBI07F16	170/290 mm	40			
			CBI08F16	250/390 mm	30			
			CBI09F16	350/490 mm	20			
			CBI10F16	450/650 mm	20			

Pedestal for the IF / IF Plus system are sold individually.




Installations- / EDB gulv Fuldindkapslet i stål - calciumsulfat

RAISED ACCESS FLOORS: versatile, functional, 100% made in Italy.

CBI Europe is a leading manufacturer of raised access floors, with an output of over a 5 million square metres a year. Thirty years of development and the experience gained from installations in 70 different countries around the world ensure that CBI Europe's raised floor systems solve all the

problems normally caused by incompatibility between architectural restrictions and the perpetual changes demanded by evolving technology. CBI Europe's floors also create environments with a high level of sustainability and livability.

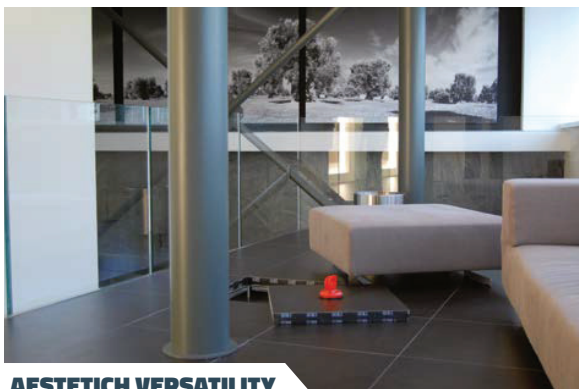

AESTETICH VERSATILITY



LIMITLESS CONFIGURATION



HI-TECH PERFORMANCES

Why

**VERSATILE, HIGH-TECH, SUSTAINABLE,
EASY TO INSTALL AND INSPECT:
THE PERFECT SOLUTION FOR ALL
TYPES OF STRUCTURAL AND DESIGN
REQUIREMENTS.**

Where

**NEW-BUILD AND REFURBISHED OFFICES,
BANKS, OPERATIONS CENTRES,
CONTROL ROOMS, HOSPITALS,
HOMES AND PUBLIC BUILDINGS.**

Benefit

- **ACHIEVING FLEXIBLE, COMFORTABLE, CONTEMPORARY AND RESPONSIBLE INTERIORS.**
- **OBTAINING POINTS FOR LEED CERTIFICATION.**
- **SOUNDPROOFED ENVIRONMENTS.**
- **SPEEDING UP CONSTRUCTION.**
- **CONTAINING COSTS OF LABOUR AND MAINTENANCE.**
- **STRUCTURES 100% INSPECTABLE.**
- **INTEGRATION WITH ADVANCED CLIMATE CONTROL, DOMOTICS AND LIGHTING.**
- **PRECISE BUDGETING.**



Installations- / EDB gulv

Fuldindkapslet i stål - calciumsulfat



FIRE REACTION

All products are continually subjected to laboratory tests during the design and testing of certified institutes before sale. The Calcium Sulphate Fully Steel Encapsulated System CBI Europe is the first and only one to have obtained the highest certification of fire resistance: REI 60.



EXTENDED WORKING LIFE & DIMENSIONAL STABILITY

The excellence of the materials used and the production technologies make panels and structures resistant and lasting over time.



ACOUSTIC ABSORPTION

The high density of the materials used contributes to the absorption of sounds, increasing the comfort of the working environments. Upon request they can be supplied with certifications.



WALKING COMFORT

The flexural strength ensures an optimal response to the stresses of foot traffic. Upon request they can be supplied with certifications.



HUMIDITY RESISTANCE

Maintain their dimensional stability even under extreme ambient conditions, and can therefore be installed in environments characterised by high levels of relative humidity and large variations in temperature.



LEED CERTIFICATION

Wood agglomerate or calcium sulphate panels obtained from recyclable raw materials and manufactured in certified and constantly monitored processes to guarantee the highest standards of quality and safety. Each system contributes to obtaining points for LEED certification.



FASTNESS

Light, modular and easy to handle, the systems are designed to guarantee rapid installation, respecting all the requirements of planarity and orthogonality. The inspection of the individual panels allows a significant reduction in time and maintenance costs.



INSPECTABILITY

100% inspectable, giving easy access to water pipes and electrical cables and permitting easy reconfiguration of rooms.

