



601301 HYDROBULLET MINI LED






800mm height bollard, round shape diam. 140 mm, for outdoor surface installation, 360° light emission, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage bolts included- Built-in LED driver 220-240V 50-60Hz, with CREE LED.

Energy Label **A++**

- Material: high corrosion resistance die-cast copper-free aluminum body and frame.
- Coating: polyester powder coating with phosphocromating pre-finish
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Anchorage unit included



	LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
12 WATT 220-240V 50-60HZ ELECTRONIC IP65 4,00 KG UNIT GROSS WEIGHT	MID-POWER LED	 3.000°K WARM-WHITE	 360°	888	74.00	 MATT BLACK

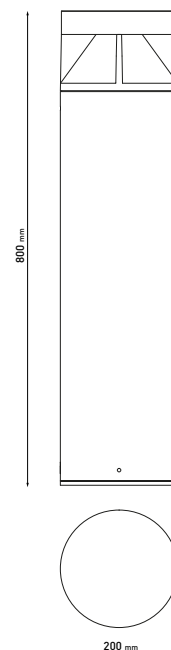
601302 HYDROBULLET MEDIUM LED






800mm height bollard, round shape diam. 200 mm, for outdoor surface installation, 360° light emission, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage bolts included- Built-in LED driver 220-240V 50-60Hz, with CREE LED.

Energy Label **A++**

- Material: high corrosion resistance die-cast copper-free aluminum body and frame.
- Coating: polyester powder coating with phosphocromating pre-finish
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Anchorage unit included



	LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
26 WATT 220-240V 50-60HZ ELECTRONIC IP65 6,00 KG UNIT GROSS WEIGHT	MID-POWER LED	 3.000°K WARM-WHITE	 360°	1.924	74.00	 MATT BLACK



