






603001 HYDROWAY MINI ROUND LED

680mm height bollard, round shape, for outdoor surface installation, 360° light emission, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage unit included- Built-in LED driver 220-240V 50-60Hz, with 4 CREE XP-E high-power LED. IP65 rating.

Energy Label **A++**

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 4 x 2W CREE "XP-E" LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser.
- Anchorage unit included.



| | LIGHT SOURCE | LED COLOR* | LIGHT BEAM OPTIONS | LUMEN OUTPUT (lm) | LUMINOUS EFFICACY (lm/w) | COLORS OPTIONS |
|---|----------------|--|---|-------------------|--------------------------|---|
| 10 WATT 220-240V 50-60HZ ELECTRONIC IP65 2,80 KG UNIT GROSS WEIGHT | HIGH-POWER LED |  3.000°K WARM-WHITE |  360° | 600 | 60.00 |  TEXTURED GREY |




603002 HYDROWAY MINI SQUARE LED

680mm height bollard, square shape, for outdoor surface installation, 4x85° light emission, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage unit included- Built-in LED driver 220-240V 50-60Hz, with 4 CREE XP-E high-power LED. IP65 rating.

Energy Label **A++**

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 4 x 2W CREE "XP-E" LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser.
- Anchorage unit included.



| | LIGHT SOURCE | LED COLOR* | LIGHT BEAM OPTIONS | LUMEN OUTPUT (lm) | LUMINOUS EFFICACY (lm/w) | COLORS OPTIONS |
|---|----------------|--|--|-------------------|--------------------------|---|
| 10 WATT 220-240V 50-60HZ ELECTRONIC IP65 2,80 KG UNIT GROSS WEIGHT | HIGH-POWER LED |  3.000°K WARM-WHITE |  4 X 85° | 600 | 60.00 |  TEXTURED GREY |






603003 HYDROWAY MEDIUM 01 ROUND LED

380mm height bollard, round shape, for outdoor surface installation, 360° light emission, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage bolts included- Built-in LED driver 220-240V 50-60Hz, with 8 CREE XP-E high-power LED. IP65 rating.

Energy Label **A++**

- Material: high corrosion resistance die-cast copper-free aluminum body and frame.
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 8 x 2.5 W CREE XP-E LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser
- Anchorage unit included

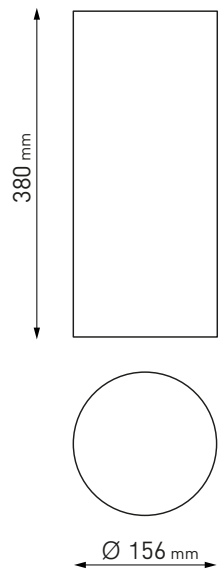

| | LIGHT SOURCE | LED COLOR* | LIGHT BEAM OPTIONS | LUMEN OUTPUT (lm) | LUMINOUS EFFICACY (lm/w) | COLORS OPTIONS |
|---|----------------|-----------------------|--------------------|-------------------|--------------------------|----------------|
| 20 WATT 220-240V 50-60HZ ELECTRONIC IP65 4,30 KG UNIT GROSS WEIGHT | HIGH-POWER LED | 3.000°K WARM-WHITE | 360° | 1.200 | 60.00 | TEXTURED GREY |












603004 HYDROWAY MEDIUM 02 ROUND LED

680mm height bollard, round shape, for outdoor surface installation, 360° light emission, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage bolts included- Built-in LED driver 220-240V 50-60Hz, with 8 CREE XP-E high-power LED. IP65 rating.

Energy Label A++

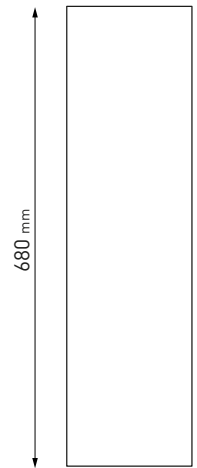- Material: high corrosion resistance die-cast copper-free aluminum body and frame.
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 8 x 2.5 W CREE XP-E LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser
- Anchorage unit included



| | LIGHT SOURCE | LED COLOR* | LIGHT BEAM OPTIONS | LUMEN OUTPUT (lm) | LUMINOUS EFFICACY (lm/w) | COLORS OPTIONS |
|---|----------------|--|---|-------------------|--------------------------|---|
| 20 WATT 220-240V 50-60HZ ELECTRONIC IP65 5,20 KG UNIT GROSS WEIGHT | HIGH-POWER LED |  3.000°K WARM-WHITE |  360° | 1.200 | 60.00 |  TEXTURED GREY |








603005 HYDROWAY MEDIUM 01 SQUARE LED

380mm height bollard, square shape, for outdoor surface installation, 4x85° light emission, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage bolts included- Built-in LED driver 220-240V 50-60Hz, with 8 CREE XP-E high-power LED. IP65 rating.

Energy Label **A++**

- Material: high corrosion resistance die-cast copper-free aluminum body and frame.
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 8 x 2.5 W CREE XP-E LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser
- Anchorage unit included

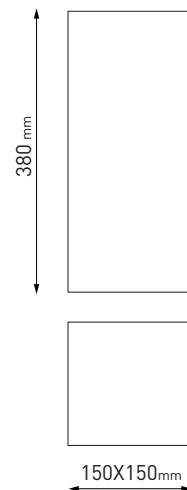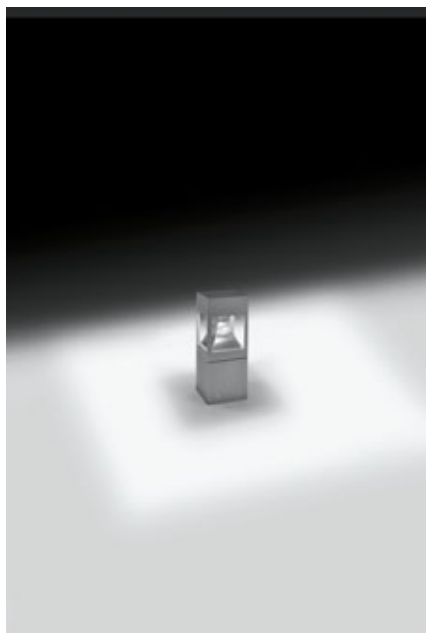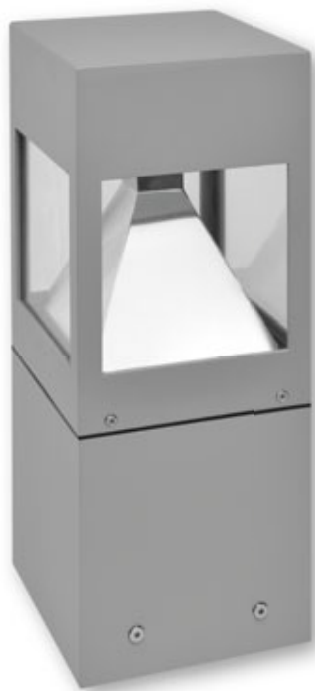

| | LIGHT SOURCE | LED COLOR* | LIGHT BEAM OPTIONS | LUMEN OUTPUT (lm) | LUMINOUS EFFICACY (lm/w) | COLORS OPTIONS |
|---|----------------|-----------------------|--------------------|-------------------|--------------------------|----------------|
| 20 WATT 220-240V 50-60HZ ELECTRONIC IP65 3,80 KG UNIT GROSS WEIGHT | HIGH-POWER LED | 3.000°K WARM-WHITE | 4 X 85° | 1.200 | 60.00 | TEXTURED GREY |









603006 HYDROWAY MEDIUM 02 SQUARE LED

680mm height bollard, square shape, for outdoor surface installation, 4x85° light emission, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage bolts included- Built-in LED driver 220-240V 50-60Hz, with 8 CREE XP-E high-power LED. IP65 rating.


Energy Label **A++**

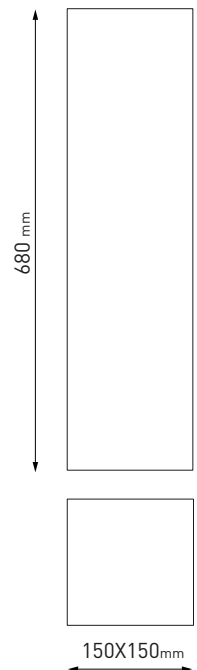- Material: high corrosion resistance die-cast copper-free aluminum body and frame.
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 8 x 2.5 W CREE XP-E LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser
- Anchorage unit included



| | LIGHT SOURCE | LED COLOR* | LIGHT BEAM OPTIONS | LUMEN OUTPUT (lm) | LUMINOUS EFFICACY (lm/w) | COLORS OPTIONS |
|---|----------------|--|--|-------------------|--------------------------|---|
| 20 WATT 220-240V 50-60HZ ELECTRONIC IP65 5,20 KG UNIT GROSS WEIGHT | HIGH-POWER LED |  3.000°K WARM-WHITE |  4 X 85° | 1.200 | 60.00 |  TEXTURED GREY |



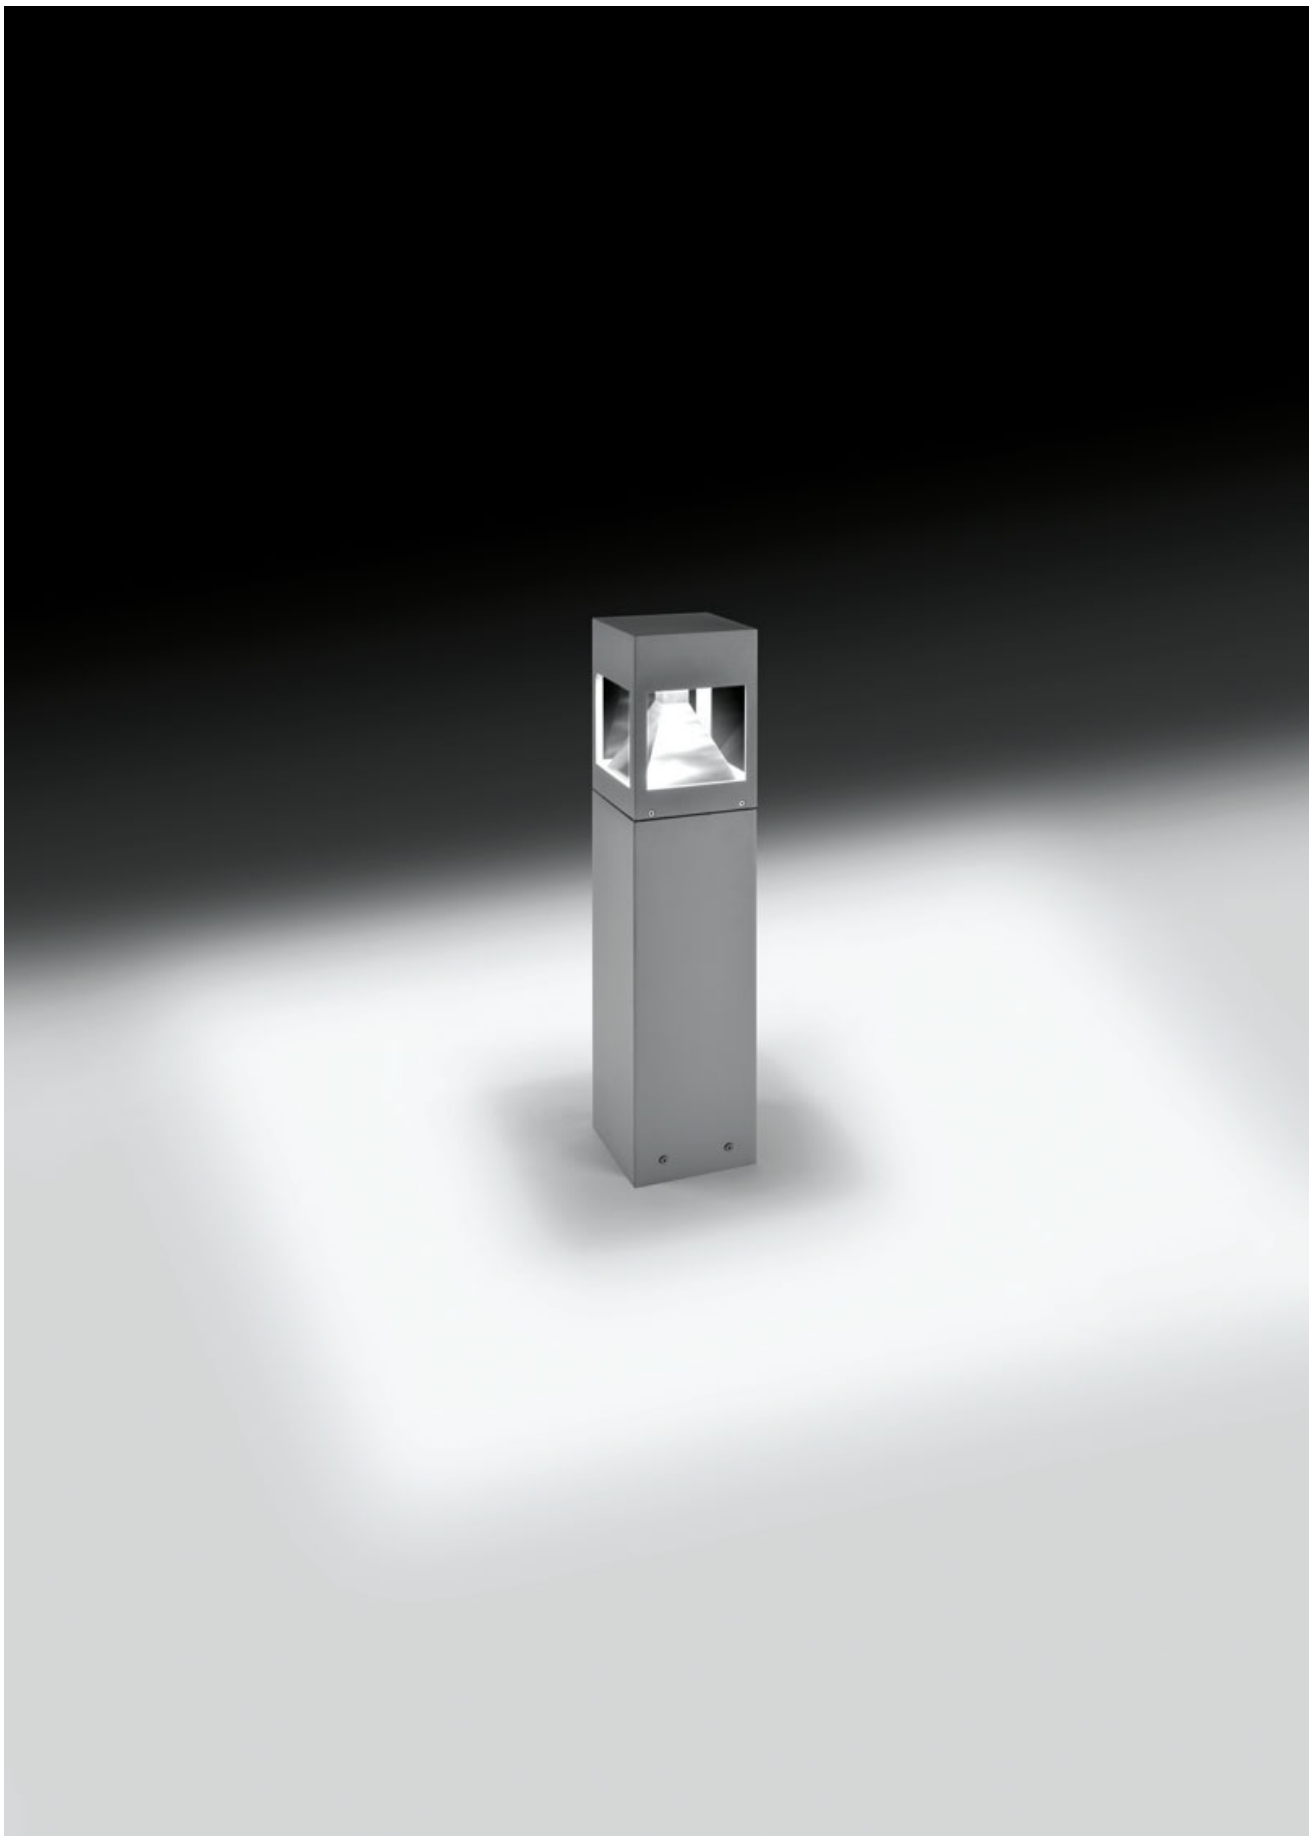




601401 HYDROWAY MEDIUM STEEL ROUND LED




NEW

700mm height bollard, round shape diam. 157 mm, for outdoor surface installation, 360° light emission, completely realized in stainless steel AISI 316L brushed finish, 4mm thick PMMA diffuser, moulded silicone gasket and stainless steel AISI 316 screws. Anchorage bolts included- Built-in LED driver 220-240V 50-60Hz, with 1 x CREE COB LED.

Energy Label **A++**

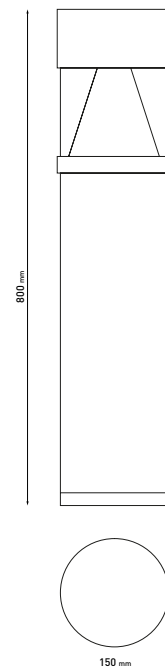- Material: stainless steel AISI 316L
- NR. 1 x CREE COB LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Anchorage unit included



| | LIGHT SOURCE | LED COLOR* | LIGHT BEAM OPTIONS | LUMEN OUTPUT (lm) | LUMINOUS EFFICACY (lm/w) | COLORS OPTIONS |
|--|--------------|--|---|-------------------|--------------------------|---|
| 15 WATT 220-240V 50-60HZ ELECTRONIC IP65 10,00 KG UNIT GROSS WEIGHT | COB LED |  3.000°K WARM-WHITE |  360° | 900 | 60.00 |  STAINLESS STEEL |



