




TTM - LED




Norms
EN 60598-1, EN 60598-2-1


CE IP68 IK10 960°C



TTM LED 26W
TUP 4000K



TTM LED 26W
TOP 4000K

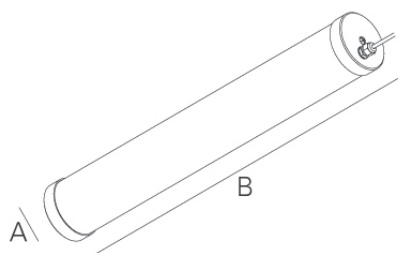

Diameter (mm)	Længde (mm)	Vægt (kg)
Ø105	662	2,9
Ø105	1222	3,2
Ø105	1502	4,5
Ø105	1502	4,5

W	Lm	Lm/W	n(%)
Transparent afskærmning			
26	3220	124	100
47	6440	137	100
57	8050	140	99
84	13400	152	95
Opal afskærmning			
26	3220	113	91
47	6440	127	93
57	8050	127	90
84	13400	139	87

Armaturhus:

Polycarbonatrør med isatte polycarbonat afslutninger

Overfladebehandling:

Pulverlakeret bakke til driver

Afskærmning:

Polycarbonat

Fortrådning:

Gennemfortrådet.

Lyskilde:

LED 3000K CRI >80

Forventet levetid:

65.000T/L80, B10, Ta:25°C

LED driver:

200-240 VAC/50/60 Hz

Tilbehør:

- ◆ Monteringstype
- ◆ wireophæng
- ◆ 1 times nødbelysning
- ◆ Metalmuffe

Skal specificeres ved køb:

- ◆ afskærmningKelvin (standard 3000K)
- ◆ dæmpbar driver
- ◆ 1T nødbelysning
- ◆ vægmonteret eller nedhængt

