



Concept O D/I



Armaturhus:

Extruderet aluminium

Overfladebehandling:

Pulverlakeret

Afskærmning:

Polycarbonat

Lyskilde:


LED 3000K CRI >80

Forventet levetid:


65.000T/L80, B10, Ta:25°C

LED driver:

200-240 VAC/50/60 Hz

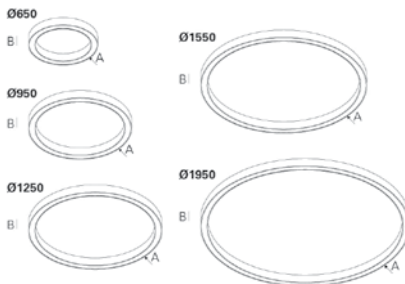

EN 60598-1 , EN 60598-2-2

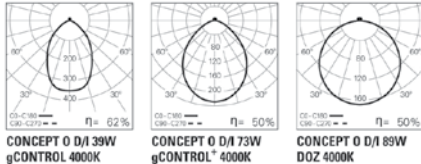

White	W	Golden eye	G
Gray	G	Safari	S
Black	B	Auburn	A
Blue	U	Rusty shell	R
Green	V	Pine chocolate	C
Yellow	T	Mix	M
Red	K	Dark rock	D
Orange	N	Carbon	I

Dimensioner (mm)	Hulmål (mm)	vægt (kg)
Ø650x85	6,4	4,2
Ø950x85	7,0	6,3
Ø1250x85	8,4	8,3
Ø1550x85	10,6	10,5
Ø1950x85	11,2	13,2

URG	W	Lm	Lm/W	n(%)
Opal afskærmning				
<19	39	5640	80	55
<16	56	8460	82	54
<19	73	11280	83	54
<16	89	14100	79	50
--	112	16920	--	--

Microprismatisk polycarbonat plus				
<16	39	5640	71	49
<16	56	8460	74	49
<16	73	11280	77	50
<16	89	14100	73	46
--	112	16920	--	00

Microprismatisk polycarbonat				
<16	39	5640	90	62
<16	56	8460	92	61
<16	73	11280	94	61
<16	89	14100	90	57
--	112	16920	--	--

Tilbehør:

- ◆ loftroset
- ◆ forsyningskabel (2 tykkelser)
- ◆ centreret loftroset
- ◆ ophæng

Skal specificeres ved køb:

- ◆ afskærmning
- ◆ farve på armaturhus
- ◆ Kelvin (standard 3000K)
- ◆ dæmpbar driver
- ◆ dynamisk hvid LED
- ◆ 1 ell 3T nødbelysning

