

HIKARI /C

TECHNICAL LIGHTING

Norms

EN 60598-1 , EN 60598-2-1


Body: Steel sheet.

Finish: Powder coated.


Optical system: Optical glass convex lenses.

Light source: LED 4000K, CRI>80.


LED life time: 50.000h @ L80, B10, Ta 25°C.

Control gear: LED Driver 220-240VAC-50/60Hz.

50° Lens

LED	UGR	W	Lm	Lm/W	η(%)	AxBxC (mm)	Kg	HF	DALI
	≤10	44	5768	104	79	597x597x42	8,5	90322.L038.E5	90322.L038.H5
	≤10	44	5768	104	79	1180x258x42	8,0	90323.L038.E5	90323.L038.H5


80° Lens

LED	UGR	W	Lm	Lm/W	η(%)	AxBxC (mm)	Kg	HF	DALI
	≤16	44	5768	105	80	597x597x42	8,5	90322.L038.E8	90322.L038.H8
	≤16	44	5768	102	78	1180x258x42	8,0	90323.L038.E8	90323.L038.H8

OPTIONS

Finish

1	2	Order code
		White / Black W/B
		White / Gray W/G
		Gray / White G/W
		Gray / Black G/B
		Black / White B/W
		Black / Gray B/G

Subtitle:


- (1) Luminaire outside trim colour
- (2) Luminaire inside trim colour

• The finish order code is based on two colours, where (1) is the luminaire outside trim colour and (2) is the luminaire inside trim colour.


Colour temperature

Order code
3000K
3000



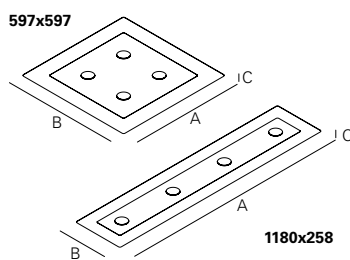

Bluetooth module

Bluetooth module for wireless control through smartphone.

Option supplied under request.


Low power version

Option supplied under request.

PHOTOMETRY

HIKARI /C 44W (600x600mm) 4000K 50°

HIKARI /C 44W (600x600mm) 4000K 80°
DIMENSIONS

TO SPECIFY

Surface LED luminaire, with modern and elegant lines. Equipped with 50° or 80° convex optical glass lenses, providing high visual comfort (UGR≤10). Standard version with 4000K, CRI>80 and 50.000h lifetime (@ L80, B10, Ta 25°C). Different colour combinations available. Optional DALI dimmable driver, 3000K and Bluetooth module for wireless control through smartphone. - as Roxo Lighting HIKARI /C

