



HIKARI D/I

TECHNICAL LIGHTING

Norms

EN 60598-1, EN 60598-2-1



Body: Steel sheet.

Finish: Powder coated.

Optical system: Optical glass convex lenses.

Light source: LED 4000K, CRI>80.

LED life time: 50.000h @ L80, B10, Ta 25°C.

Control gear: LED Driver 220-240VAC-50/60Hz.



50° Lens | 70% (Direct) + 30% (Indirect)

LED	UGR	W	Lm	Lm/W	η(%)	AxBxC (mm)	Kg	HF	DALI
	≤10	57	7900	114	82	600x600x46	8,3	90385.L038.E5	90385.L038.H5
	≤10	53	7367	111	80	1180x258x46	7,6	90386.L038.E5	90386.L038.H5

80° Lens | 70% (Direct) + 30% (Indirect)

LED	UGR	W	Lm	Lm/W	η(%)	AxBxC (mm)	Kg	HF	DALI
	≤13	57	7900	114	82	600x600x46	8,3	90385.L038.E8	90385.L038.H8
	≤13	53	7367	111	80	1180x258x46	7,6	90386.L038.E8	90386.L038.H8

50° Lens | 80° Lens:

- To complete the 600x600 version add suspension, current supply cable and ceiling rose. Please order separately.
- To complete the 1180x258 version add suspension, please order separately. Current supply cable and ceiling rose included.


OPTIONS



Finish

Order code	Finish
W/B	White / Black
W/G	White / Gray
G/W	Gray / White
G/B	Gray / Black
B/W	Black / White
B/G	Black / Gray

Subtitle:



- (1) Luminaire outside trim colour
- (2) Luminaire inside trim colour

- The finish order code is based on two colours, where (1) is the luminaire outside trim colour and (2) is the luminaire inside trim colour.



Ceiling rose (for 600x600mm version)

Order code	Ceiling rose
9717	Square ceiling rose Surface mounted
9714	Recessed

- Please order suspension type "1" (x4) separately.
- Other colours under request.



Ceiling rose (for 1180x258mm version)

Order code	Ceiling rose
CXS	Rectangular ceiling rose Surface mounted
CXE	Recessed

- Please order suspension type "1" (x2) separately.
- Other colours under request.



Colour temperature

Order code	Colour temperature
3000	3000K



Current supply cable

Order code	Current supply cable
940400	1,5m transparent cable 0,75mm ² 3x0,75mm ²
940500	5x0,75mm ²



Bluetooth module

Bluetooth module for wireless control through smartphone.

Option supplied under request.




Suspension

Order code	Suspension
910001	Suspension type "1" (x2)
910002	Suspension type "1" (x4)

- (x2) only for 1180x258 version.
- (x4) only for 600x600 version.



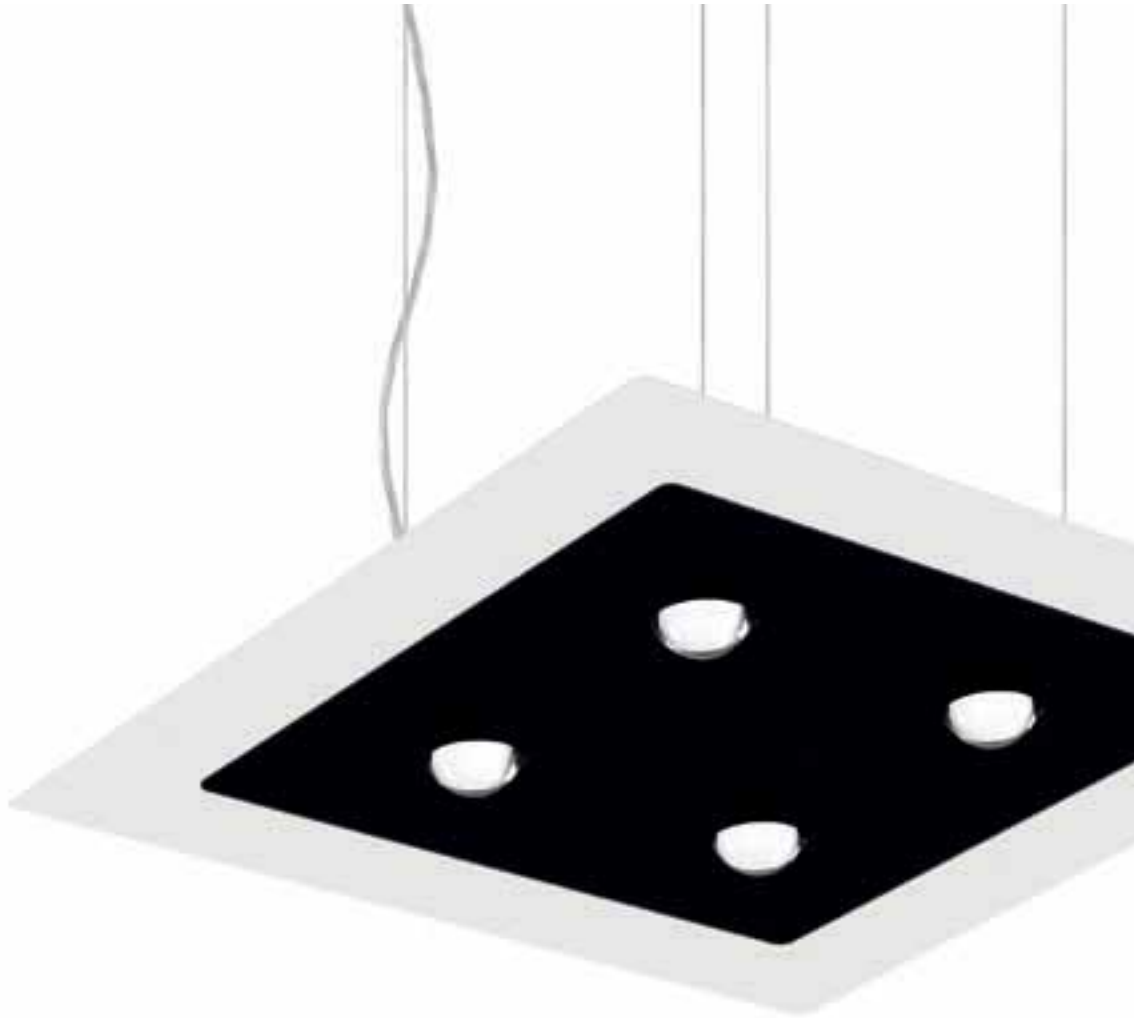


OPTIONS (CONTINUE)

Low power


Low power version

Option supplied under request.

PHOTOMETRY




HIKARI D/I 57W
(600x600mm) 4000K 50°



HIKARI D/I 57W
(600x600mm) 4000K 80°

DIMENSIONS

600x600



1180x258

TO SPECIFY

Suspended direct/indirect LED luminaire, with modern and elegant lines. Equipped with 50° or 80° convex optical glass lenses, providing high visual comfort (UGR≤10). Standard version with 4000K, CRI>80 and 50.000h lifetime (@ L80, B10, Ta 25°C). Different colour combinations available. Optional DALI dimmable driver, 3000K and Bluetooth module for wireless control through smartphone. Suspension, current supply cable and ceiling rose as accessories. - as Roxo Lighting HIKARI D/I

