



## HIKARI /E

TECHNICAL LIGHTING

### Norms

EN 60598-1 , EN 60598-2-2



**Body:** Steel sheet.

**Finish:** Powder coated.

**Optical system:** Optical glass convex lenses.

**Fixing system:** Brackets.

**Light source:** LED 4000K, CRI>80.

**LED life time:** 50.000h @ L80, B10, Ta 25°C.

**Control gear:** LED Driver 220-240VAC-50/60Hz.

### 50° Lens

LED	UGR	W	Lm	Lm/W	η(%)	AxBxC (mm)	Icon	Kg	HF	DALI
	≤10	44	5768	104	79	597x597x82	485x485	8,5	90320.L038.E5	90320.L038.H5
	≤10	44	5768	104	79	1180x258x81	1105x185	8,0	90321.L038.E5	90321.L038.H5

### 80° Lens

LED	UGR	W	Lm	Lm/W	η(%)	AxBxC (mm)	Icon	Kg	HF	DALI
	≤16	44	5768	105	80	597x597x82	485x485	8,5	90320.L038.E8	90320.L038.H8
	≤16	44	5768	102	78	1180x258x81	1105x185	8,0	90321.L038.E8	90321.L038.H8

### OPTIONS




#### Finish

- |   |   |            |
|---|---|------------|
| 1 | 2 | Order code |
|   |   | W/B        |
|   |   | W/G        |
|   |   | G/W        |
|   |   | G/B        |
|   |   | B/W        |
|   |   | B/G        |

Order code  
W/B  
W/G  
G/W  
G/B  
B/W  
B/G

#### Subtitle:



- (1) Luminaire outside trim colour
- (2) Luminaire inside trim colour

• The finish order code is based on two colours, where (1) is the luminaire outside trim colour and (2) is the luminaire inside trim colour.



#### Colour temperature

3000K

Order code  
3000



#### Safety cable

Steel safety cable

Order code  
955000



#### Bluetooth module

Bluetooth module for wireless control through smartphone.


Option supplied under request.




#### Low power version

Option supplied under request.

### PHOTOMETRY




**HIKARI /E 44W**  
(600x600mm) 4000K 50°



**HIKARI /E 44W**  
(600x600mm) 4000K 80°

### DIMENSIONS

597x597

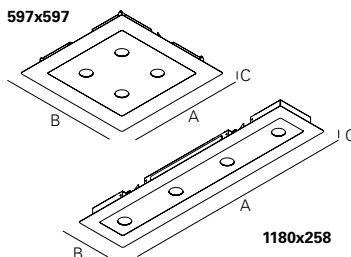

1180x258





#### TO SPECIFY

---

Recessed LED luminaire, with modern and elegant lines. Equipped with 50° or 80° convex optical glass lenses, providing high visual comfort ( $UGR \leq 10$ ). Standard version with 4000K,  $CRI > 80$  and 50.000h lifetime (@ L80, B10, Ta 25°C). Different colour combinations available. Optional DALI dimmable driver, 3000K and Bluetooth module for wireless control through smartphone. - as Roxo Lighting HIKARI /E

