

# REBA E Line


**Armaturhus:**

Extruderet aluminiumsprofil

**Overfladebehandling:**

Anodiseret aluminium

**Lyskilde:**

LED 3000K CRI &gt;80



**Forventet levetid:**

50.000T/L80, B10, Ta:25°C

**LED driver:**

200-240 VAC/50/60 Hz

EN 60598-1, EN 60598-2-1

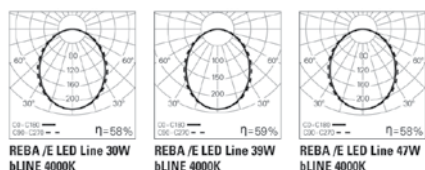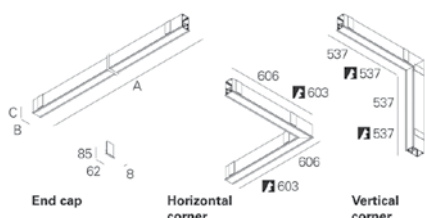

Dimensioner (mm)	Hulmål (mm)	vægt (kg)
842 x 62 x 85	842 x 56	1,9
1122 x 62 x 85	1122 x 56	2,4
1402 x 62 x 85	1402 x 56	2,8
1682 x 62 x 85	1682 x 56	3,8
1964 x 62 x 85	1964 x 56	4,3
2244 x 62 x 85	2244 x 56	4,7
2524 x 62 x 85	2524 x 56	5,2
2804 x 62 x 85	2804 x 56	5,6

URG	W	Lm	Lm/W	n(%)
<25	30	3870	75	58
<25	39	5160	78	59
<25	47	6450	80	58
<25	56	7740	80	58
-	64	9030	83	59
-	77	10320	78	58
-	86	11610	80	59
-	94	12900	80	58

**Tilbehør:**

- ◆ Wieland konnektor
- ◆ start kit
- ◆ gennemfortrådning
- ◆ samle stykke
- ◆ blank afskærmning
- ◆ transparent hjørnesamling
- ◆ sikkerhedskabel

**Skal specificeres ved køb:**

- ◆ Kelvin (standard 3000K)
- ◆ dæmpbar driver
- ◆ dynamisk hvid LED
- ◆ 1 ell 3T nødbelysning