

REBA Line


Armaturhus:

Extruderet aluminiumsprofil

Overfladebehandling:

Anodiseret aluminium

Lyskilde:


LED 3000K CRI >80

Forventet levetid:


50.000T/L80, B10, Ta:25°C

LED driver:

200-240 VAC/50/60 Hz

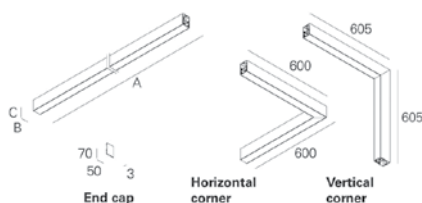

EN 60598-1, EN 60598-2-1

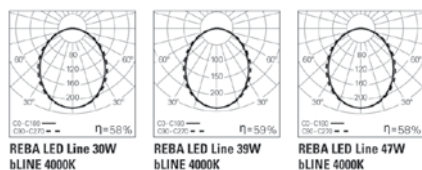

Dimensioner (mm)	vægt (kg)
842 x 50 x 70	1,9
1122 x 50 x 70	2,4
1402 x 50 x 70	2,8
1682 x 50 x 70	3,8
1964 x 50 x 70	4,3
2244 x 50 x 70	4,7
2524 x 50 x 70	5,2
2804 x 50 x 70	5,6

URG	W	Lm	Lm/W	n(%)
<25	30	3870	75	58
<25	39	5160	78	59
<25	47	6450	80	58
<25	56	7740	80	58
-	64	9030	83	59
-	77	10320	78	58
-	86	11610	80	59
-	94	12900	80	58

Tilbehør:

- ◆ Wieland konektor
- ◆ start kit
- ◆ forsyningskabel
- ◆ gennemfortrådning
- ◆ samle stykke
- ◆ blank afskærmning
- ◆ transparent hjørnesamling
- ◆ loftsroset
- ◆ ophæng

Skal specificeres ved køb:

- ◆ Kelvin (standard 3000K)
- ◆ dæmpbar driver
- ◆ dynamisk hvid LED
- ◆ 1 ell 3T nødbelysning