




## REBA P



EN 60598-1, EN 60598-2-1

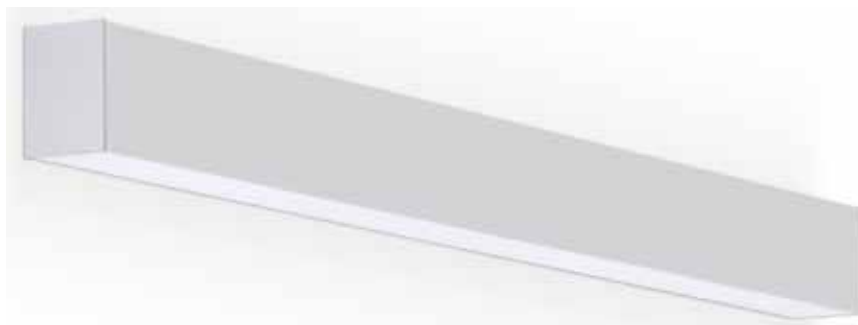

**Armaturhus:**

Extruderet aluminiumsprofil

**Overfladebehandling:**

Anodiseret aluminium

**Lyskilde:**


LED 3000K CRI >80

**Forventet levetid:**


50.000T/L80, B10, Ta:25°C

**LED driver:**

200-240 VAC/50/60 Hz

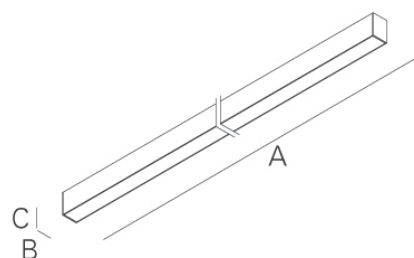

Dimensioner (mm)	vægt (kg)
848 x 50 x 70	1,9
1128 x 50 x 70	2,4
1408 x 50 x 70	2,8



REBA /P LED 39W  
bLINE 4000K

URG	W	Lm	Lm/W	n(%)
<25	30	3879	75	58
<25	39	5160	78	59
<25	47	6450	80	58

**Skal specificeres ved køb:**

- ◆ Kelvin (standard 3000K)
- ◆ dæmpbar driver
- ◆ dynamisk hvid LED
- ◆ afskærmning
- ◆ 1 ell 3T nødbelysning

