



## REBA T



### Armaturhus:

Extruderet aluminiumsprofil

### Overfladebehandling:

Anodiseret aluminium

### Lyskilde:

LED 3000K CRI >80



### Forventet levetid:

50.000T/L80, B10, Ta:25°C


### LED driver:

200-240 VAC/50/60 Hz

EN 60598-1, EN 60598-2-1

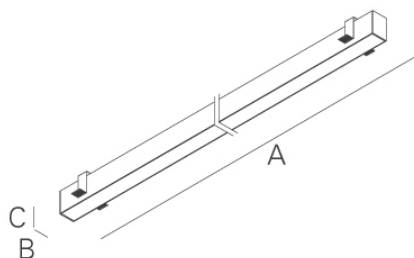

REBA /T LED 39W  
bLINE 4000K



REBA /T LED 47W  
bLINE 4000K

Dimensioner (mm)	Hulmål (mm)	vægt (kg)
848 x 50 x 70	849 x 51	1,9
1128 x 50 x 70	1129 x 51	2,4
1408 x 50 x 70	1409 x 51	2,8
1688 x 50 x 70	1689 x 51	3,8
1970 x 50 x 70	1971 x 51	4,3
2250 x 50 x 70	2251 x 51	4,7
2530 x 50 x 70	2531 x 51	5,2
2810 x 50 x 70	2811 x 51	5,6

URG	W	Lm	Lm/W	n(%)
<25	30	3870	75	58
<25	39	5160	78	59
<25	47	6450	80	58
<25	56	7740	80	58
-	64	9030	83	59
-	77	10320	78	58
-	86	11610	80	59
-	94	12900	80	58

### Tilbehør:

- ◆ sikkerhedskabel

### Skal specificeres ved køb:

- ◆ Kelvin (standard 3000K)
- ◆ dæmpbar driver
- ◆ dynamisk hvid LED
- ◆ 1 ell 3T nødbelysning

