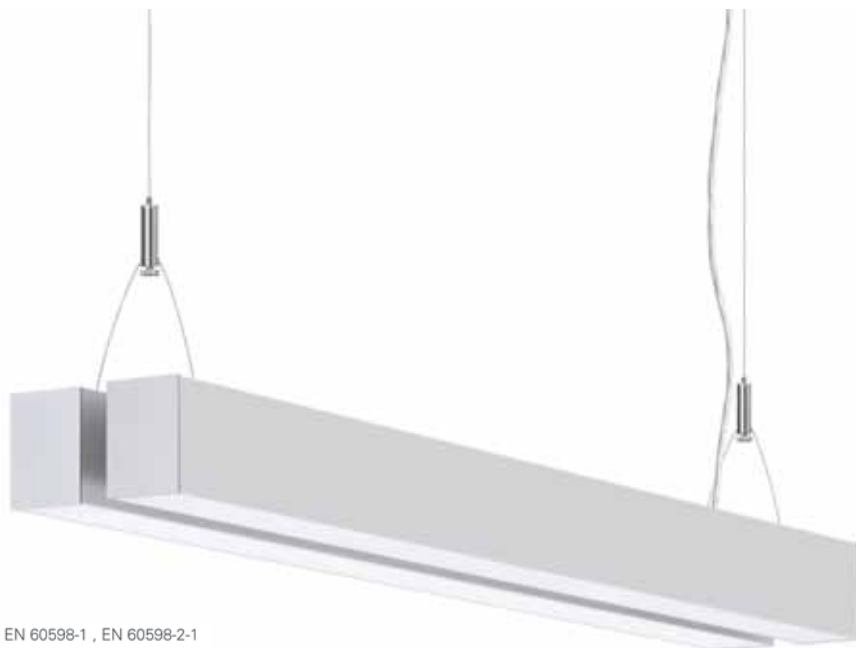


REBA X


Armaturhus:

Extruderet aluminiumsprofil

Overfladebehandling:

Anodiseret aluminium

Lyskilde:

LED 3000K CRI >80

Forventet levetid:


50.000T/L80, B10, Ta:25°C

LED driver:

200-240 VAC/50/60 Hz

Dimensioner (mm)	vægt (kg)
848 x 120 x 70	4,5
1128 x 120 x 70	5,5
1408 x 120 x 70	6,5

EN 60598-1, EN 60598-2-1

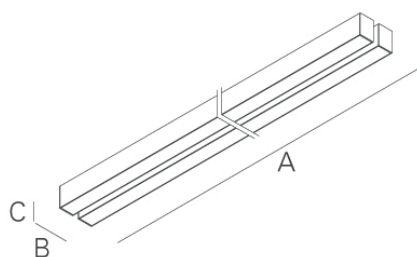

W	Lm	Lm/W	n(%)
micropismatisk afskærmning			
48	6078	77	61
60	8104	81	60
74	10130	86	63
Opal polycarbonat afskærmning			
60	7740	75	58
78	10320	78	59
94	12900	80	58

Tilbehør:

- ◆ loftroset
- ◆ forsyningskabel
- ◆ ophæng

Skal specificeres ved køb:

- ◆ Kelvin (standard 3000K)
- ◆ dæmpbar driver
- ◆ dynamisk hvid LED
- ◆ 1 ell 3T nødbelysning