




REBA 35 D/I LED

ALUMINIUM PROFILE SYSTEMS

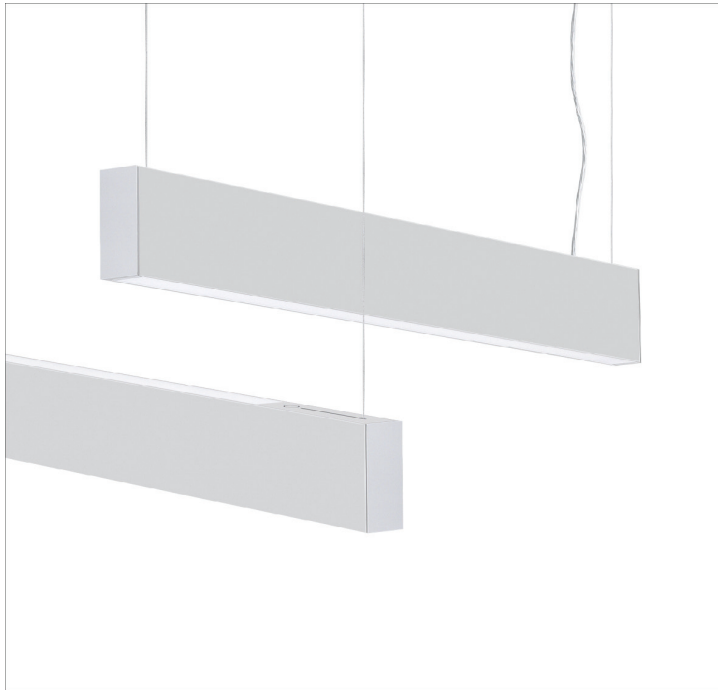

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Private Houses, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting:	Suspended.
Light Distribution:	Direct / Indirect.
Light Source:	LED 4000K, CRI>80, MacAdam Step<3, 80.000h life (@L80, B10, Ta 25°C).
Optical System:	Diffuser: Opal polycarbonate.
Control Gear:	LED driver, 220-240VAC-50/60Hz.
Materials:	Body: Extruded aluminium profile.
Surface Finish:	Anodised in natural colour.

bLINE - Opal polycarbonate diffuser


LED	UGR	W	Lm	Lm/W	η(%)	AxBxC (mm)	kg	HF	DALI
	≤22	57	8729	98	64	1128x35x100	3,5	90453.L004.E	90453.L004.H
	≤22	72	11223	101	65	1408x35x100	4,1	90453.L005.E	90453.L005.H
	≤22	87	13717	99	63	1688x35x100	4,8	90453.L006.E	90453.L006.H
	-	111	17458	101	64	2250x35x100	6,4	90453.L008.E	90453.L008.H
	-	129	19952	101	65	2530x35x100	7,2	90453.L009.E	90453.L009.H
	-	144	22446	101	65	2810x35x100	8,0	90453.L010.E	90453.L010.H

Note:
• To complete the product add suspension, current supply cable and ceiling rose. Please order separately.

COLOUR / FINISH

Code	Description
W	White
B	Black

DIMENSIONS



Example code for order: 90453.L005.E (HF) + 3000 + 971400 + 940400 + 912400Z (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

T10002EN/01





REBA 35 D/I LED ALUMINIUM PROFILE SYSTEMS

OPTIONS

Colour temperature



3000K
Tunable White

Order code
3000
T000

SwitchDIM Tunable White



SwitchDIM Tunable White

Order code
926600

Ceiling rose



Recessed
White
Black
Gray
Surface
White
Black
Gray

Order code
971400
971401
971402
971700
971701
971702

Current supply cable



1,5m transparent cable 0,75mm²
3 x 0,75 mm²
5 x 0,75 mm²

Order code
940400
940500

Suspension



Suspension type "I" (x2)
White
Black
Anodised

Order code
912400W
912400B
912400Z

Low power version



Option supplied under request.

DETAILS



Clip-in diffuser system




Suspended version



End caps without visible screws

PHOTOMETRY



REBA 35 D/I LED
L1128 bLINE 4000K

TO SPECIFY:

Linear suspended LED luminaire, with direct and indirect light, individually mounted. Extruded aluminium profile, anodised in natural colour and 35mm width. Injected polycarbonate end caps, without visible screws, and clip-in polycarbonate bLINE diffuser. Standard version with LED 4000K, CRI>80, MacAdam Step<3 and 80.000h lifetime (@L80, B10, Ta 25°C). Optional DALI dimmable LED driver, 3000K, Tunable White, suspension kit, transparent current supply cable and surface or recessed mounted ceiling rose. - as Roxo Lighting REBA 35 D/I LED.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.


TFC020EN01





REBA 35 D/I LED Line

ALUMINIUM PROFILE SYSTEMS

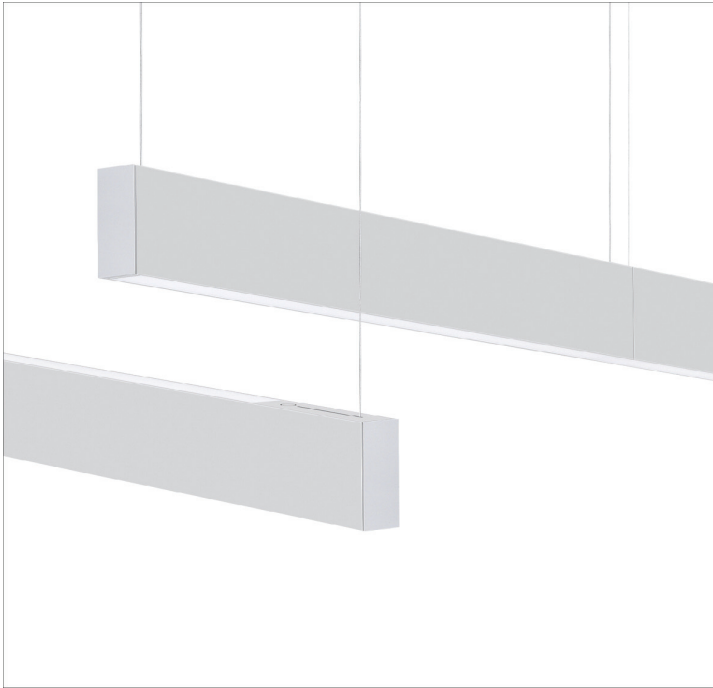

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Private Houses, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting:	Suspended.
Light Distribution:	Direct / Indirect.
Light Source:	LED 4000K, CRI>80, MacAdam Step<3, 80.000h life (@L80, B10, Ta 25°C).
Optical System:	Diffuser: Opal polycarbonate.
Control Gear:	LED driver, 220-240VAC-50/60Hz.
Wiring:	Through-wiring included.
Materials:	Body: Extruded aluminium profile.
Surface Finish:	Anodised in natural colour.

bLINE - Opal polycarbonate diffuser (middle)



LED	UGR	W	Lm	Lm/W	η(%)	AxBxC (mm)	Kg	HF	DALI
	≤22	57	8729	98	64	1122x35x100	3,5	90454.L004.E	90454.L004.H
	≤22	72	11223	101	65	1402x35x100	4,1	90454.L005.E	90454.L005.H
	≤22	87	13717	99	63	1682x35x100	4,8	90454.L006.E	90454.L006.H
-	111	17458	101	64	2244x35x100	6,4	90454.L008.E	90454.L008.H	
-	129	19952	101	65	2524x35x100	7,2	90454.L009.E	90454.L009.H	
-	144	22446	101	65	2804x35x100	8,0	90454.L010.E	90454.L010.H	

Add suffix to order: Start - 00000.0000.0.0049 End - 00000.0000.0.0050

Note:

- To complete a line, start kit will be necessary. Please order separately.
- Dimensions without end caps, please add 6mm to complete the line.
- Diffuser not included. Please order separately.
- For the lines up till 7m length, the adequate cabling is a power-supply cable with 0,75mm² thickness. Please order separately.
- For the lines with length above 7m and below 22m, the adequate cabling is a power-supply cable with 1,5mm² thickness. Please order separately.

Example code for order: 90454.L005.H.0049 (START) + 90454.L005.H (MIDDLE) + 90454.L005.H.0050 (END) + 985615 + 3000 + 922910G + (2x)931910 + 971400 + 940500 + (3x) 912400Z + 992811 (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

TIG002EN/01






REBA 35 D/I LED Line ALUMINIUM PROFILE SYSTEMS

COLOUR / FINISH

Code	Description
□ W	White
■ B	Black

DIMENSIONS



End cap 100 | 35 | 3

OPTIONS

bLINE diffuser



5m length
15m length
30m length

Order code
985605
985615
985630

Colour temperature



3000K
Tunable White

Order code
3000
T000

SwitchDIM Tunable White



SwitchDIM Tunable White

Order code
926600

Start Kit



Start Kit - Start / End
White
Black
Gray

• Two end caps included.

Order code
922910W
922910B
922910G

Body connector



Body connector

Order code
931910

Ceiling rose



Recessed
White
Black
Gray
Surface
White
Black
Gray

Order code
971400
971401
971402
971700
971701
971702

Current supply cable



1,5m transparent cable 0,75mm²
3 x 0,75 mm²
5 x 0,75 mm²
1,5m transparent cable 1,5mm²
3 x 1,5 mm²
5 x 1,5 mm²

Order code
940400
940500
940300
940000

Suspension



Suspension type "I" (x2)
White
Black
Anodised
Suspension type "I" for light corners (x2)
White
Black
Anodised

Order code
912400W
912400B
912400Z
912401W
912401B
912401Z

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

TFC0302EN01





REBA 35 D/I LED Line ALUMINIUM PROFILE SYSTEMS

Blank parts



1.5m length
Start/Middle
End

Order code

992810
992811

3m length
Start/Middle
End

992820
992821

Low power version



Option supplied under request.

Bespoke projects



Option supplied under request.

DETAILS



Clip-in diffuser system




Suspension detail




End caps without visible screws


PHOTOMETRY



REBA 35 D/I LED Line
L1122 bLINE 4000K SRT



REBA 35 D/I LED Line
L1122 bLINE 4000K MID



REBA 35 D/I LED Line
L1122 bLINE 4000K END

TO SPECIFY:

Linear suspended LED luminaire, with direct and indirect light, for continuous line. Extruded aluminium profile, anodised in natural colour and 35mm width. Injected polycarbonate end caps, without visible screws, and clip-in polycarbonate bLINE diffuser with up till 30m length in one single piece. Standard version with LED 4000K, CRI>80, MacAdam Step<3 and 80.000h lifetime (@L80, B10, Ta 25°C). Optional DALI dimmable LED driver, 3000K, Tunable White suspension kit, transparent current supply cable and surface or recessed mounted ceiling rose. - as Roxo Lighting REBA 35 D/I LED Line.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

TIGOR/EN01





REBA 35 /E LED

ALUMINIUM PROFILE SYSTEMS



LED

Norms: EN 60598-1, EN 60598-2-2



PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Private Houses, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting: Ceiling recessed.

Light Distribution: Direct.

Light Source: LED 4000K, CRI>80, MacAdam Step<3, 80.000h life (@L80, B10, Ta 25°C).

Optical System: Diffuser: Opal polycarbonate.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Extruded aluminium profile.

Surface Finish: Anodised in natural colour.

Fixing system: Brackets.


bLINE - Opal polycarbonate diffuser

LED	UGR	W	lm	lm/W	η(%)	AxBxC (mm)	█	kg	HF	DALI
	≤25	25	3741	87	58	863x50x80	850x41	2,3	90449.L003.E	90449.L003.H
	≤25	32	4988	92	59	1143x50x80	1130x41	2,8	90449.L004.E	90449.L004.H
	≤25	40	6235	90	58	1423x50x80	1410x41	3,3	90449.L005.E	90449.L005.H
	≤25	47	7482	91	57	1703x50x80	1690x41	3,8	90449.L006.E	90449.L006.H
	-	57	8729	90	59	1985x50x80	1972x41	4,6	90449.L007.E	90449.L007.H
	-	64	9976	92	59	2265x50x80	2252x41	5,1	90449.L008.E	90449.L008.H
	-	72	11223	92	59	2545x50x80	2532x41	5,6	90449.L009.E	90449.L009.H
	-	80	12470	90	58	2825x50x80	2812x41	6,1	90449.L010.E	90449.L010.H

COLOUR / FINISH

Code	Description
W	White
B	Black

DIMENSIONS



Example code for order: 90449.L003.E (HF) + 3000 + 955000(OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

TG00ZENV01





REBA 35 /E LED ALUMINIUM PROFILE SYSTEMS

OPTIONS

Colour temperature



3000K
Tunable White

Order code
**3000
T000**

SwitchDIM Tunable White



SwitchDIM Tunable White.

Order code
926600

Steel safety cable



Steel safety cable

Order code
955000

Low power option




Option supplied under request.

DETAILS



Clip-in diffuser system




Bracket



End caps without visible screws

PHOTOMETRY



REBA 35 /E LED
L1143 bLINE 4000K

TO SPECIFY:

Linear recessed LED luminaire, with trim, individually mounted. Extruded aluminium profile, anodised in natural colour and 50mm width. Injected polycarbonate end caps, without visible screws, and clip-in polycarbonate bLINE diffuser. Standard version with LED 4000K, CRI>80, MacAdam Step<3 and 80.000h lifetime (@L80, B10, Ta 25°C). Optional DALI dimmable LED driver, 3000K and Tunable White. - as Roxo Lighting REBA 35 /E LED.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.


TE602ENV01





REBA 35 /E LED Line

ALUMINIUM PROFILE SYSTEMS

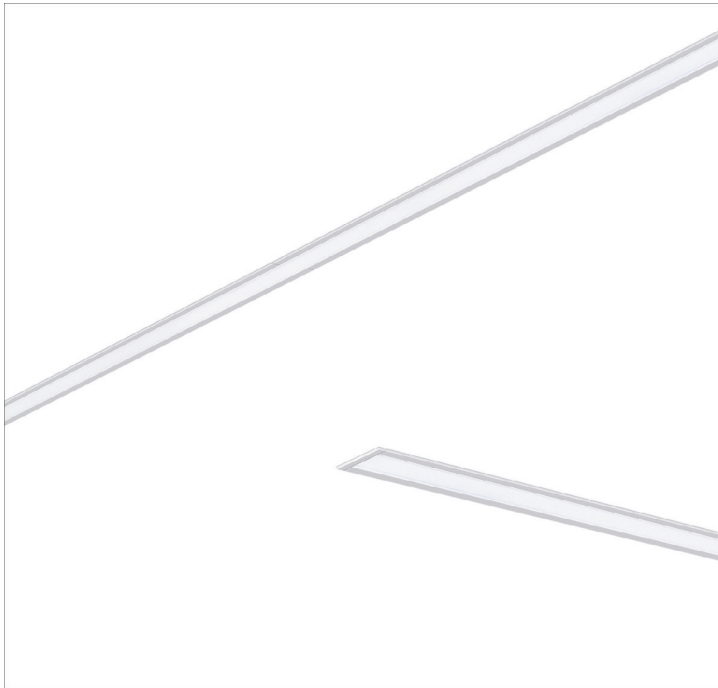

Norms: EN 60598-1, EN 60598-2-2



PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Private Houses, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting: Recessed.

Light Distribution: Direct.

Light Source: LED 4000K, CRI>80, MacAdam Step<3, 80.000h life (@L80, B10, Ta 25°C).

Optical System: Diffuser: Opal polycarbonate.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Extruded aluminium profile.

Surface Finish: Anodised in natural colour.

Fixing system: Brackets.

bLINE - Opal polycarbonate diffuser (middle)

LED	UGR	W	lm	lm/W	η(%)	AxBxC (mm)		kg	HF	DALI
	≤25	17	2494	87	59	562x50x80	562x41	1,7	90450.L002.E	90450.L002.H
	≤25	25	3741	87	58	842x50x80	842x41	2,3	90450.L003.E	90450.L003.H
	≤25	32	4988	92	59	1122x50x80	1122x41	2,8	90450.L004.E	90450.L004.H
	≤25	40	6235	90	58	1402x50x80	1402x41	3,3	90450.L005.E	90450.L005.H
	≤25	47	7482	91	57	1682x50x80	1682x41	3,8	90450.L006.E	90450.L006.H
	-	57	8729	90	59	1964x50x80	1964x41	4,6	90450.L007.E	90450.L007.H
	-	64	9976	92	59	2244x50x80	2244x41	5,1	90450.L008.E	90450.L008.H
	-	72	11223	92	59	2524x50x80	2524x41	5,6	90450.L009.E	90450.L009.H
	-	80	12470	90	58	2804x50x80	2804x41	6,1	90450.L010.E	90450.L010.H

Add suffix to order: Start - 00000.0000.0.0049 End - 00000.0000.0.0050

Note:

- To complete a line, start kit will be necessary. Please order separately.
- Recessed dimensions without end caps, please add 6mm to complete cutting dimensions.
- Diffuser not included. Please order separately.
- Profile 562mm only available for end line.
- The maximum length that a continuous line with one single power-supply can have is 30m.

Example code for order: 90450.L004.E.0049 (START) + 90450.L004.E (MIDDLE) + 90450.L004.E.0050(END) + 3000 + 922900G + (2x) 9456 + (2x) 931900 + (3x) 955000(OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

TIGBOUEN/02






REBA 35 /E LED Line ALUMINIUM PROFILE SYSTEMS

COLOUR / FINISH


Code	Description
□ W	White
■ B	Black

DIMENSIONS

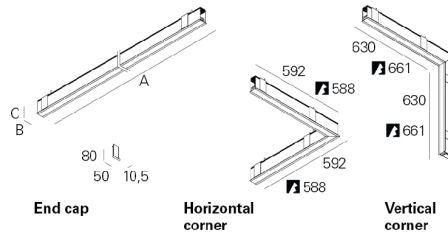

OPTIONS

bLINE diffuser



5m length
15m length
30m length

Order code
985605
985615
985630

Colour temperature



3000K
Tunable White

Order code
3000
T000

SwitchDIM Tunable White



SwitchDIM Tunable White.

Order code
926600

Start Kit




Start Kit - Start/End
White
Black
Gray

• Two end caps included.

Order code

922900W
922900B
922900G

Through-wiring



1,5mm² through-wiring
3 x 1,5 mm²
5 x 1,5 mm²

Order code
9456
9457

Body connector



Body connector

Order code
931900

Light corners



Horizontal
32W HF
32W DALI
Vertical
32W HF
32W DALI

• LED light corner luminaire includes complete gear tray with non-Dimmable or DALI LED driver and polycarbonate diffuser.

Order code
90450.H202.E
90450.H202.H
90450.V202.E
90450.V202.H

Blank parts



1,5m length
3m length

• Includes empty aluminium body and blanking cover.

Order code
992800
992801

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

T1000202





REBA 35 /E LED Line ALUMINIUM PROFILE SYSTEMS

Safety cable



Steel safety cable

Order code
955000

Low power version



Option supplied under request.

Bespoke projects




Option supplied under request.


DETAILS



Clip-in diffuser system




Bracket




End caps without visible screws


PHOTOMETRY



REBA 35 /E LED Line
L1122 bLINE 4000K SRT



REBA 35 /E LED Line
L1122 bLINE 4000K MID



REBA 35 /E LED Line
L1122 bLINE 4000K END

TO SPECIFY:

Linear recessed LED luminaire with trim, for continuous line. Extruded aluminium profile, anodised in natural colour and 50mm width. Injected polycarbonate end caps, without visible screws, and clip-in polycarbonate bLINE diffuser with up till 30m length in one single piece. Standard version with LED 4000K, CRI>80, MacAdam Step<3 and 80.000h lifetime (@L80, B10, Ta 25°C). Optional DALI dimmable LED driver, 3000K and Tunable White and light corners. - as Roxo Lighting REBA 35 /E LED Line.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.


TI600ZEN/02





REBA 35 LED

ALUMINIUM PROFILE SYSTEMS

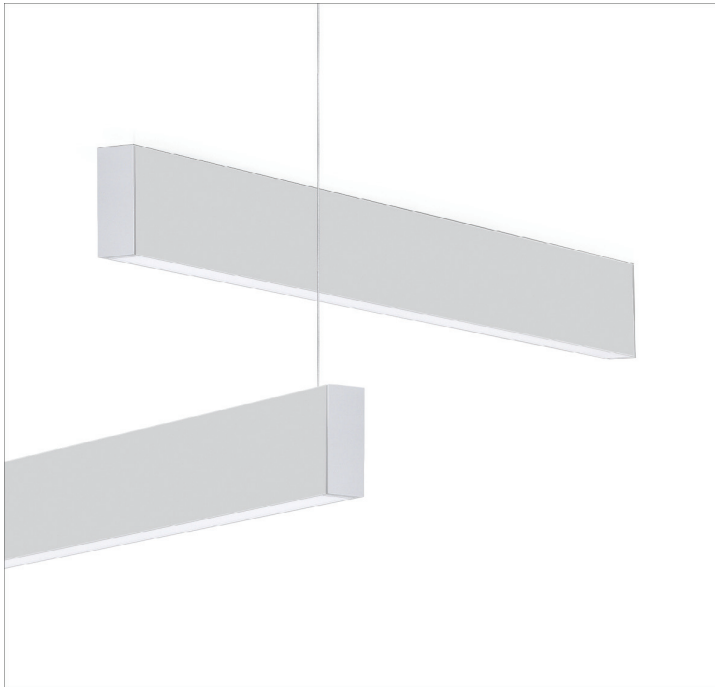

LED

Norms: EN 60598-1, EN 60598-2-1

CE RoHS COMPLIANT IP 40 950°C 230V/50Hz SELV

PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Private Houses, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting: Surface/Suspended.

Light Distribution: Direct.

Light Source: LED 4000K, CRI>80, MacAdam Step<3, 80.000h life (@L80, B10, Ta 25°C).

Optical System: Diffuser: Opal polycarbonate.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Extruded aluminium profile.

Surface Finish: Anodised in natural colour.

bLINE - Opal polycarbonate diffuser


LED	UGR	W	lm	lm/W	η(%)	AxBxC (mm)	kg	HF	DALI
	≤25	25	3741	87	58	848x35x100	2,3	90451.L003.E	90451.L003.H
	≤25	32	4988	92	59	1128x35x100	2,8	90451.L004.E	90451.L004.H
	≤25	40	6235	90	58	1408x35x100	3,3	90451.L005.E	90451.L005.H
	≤25	47	7482	91	57	1688x35x100	3,9	90451.L006.E	90451.L006.H
	-	57	8729	90	59	1970x35x100	4,6	90451.L007.E	90451.L007.H
	-	64	9976	92	59	2250x35x100	5,2	90451.L008.E	90451.L008.H
	-	72	11223	92	59	2530x35x100	5,7	90451.L009.E	90451.L009.H
	-	80	12470	90	58	2810x35x100	6,3	90451.L010.E	90451.L010.H

- Note:
- To complete the surface product add surface fixing. Please order separately.
 - To complete the suspended product add suspension, current supply cable and ceiling rose. Please order separately.

COLOUR / FINISH

Code	Description
□ W	White
■ B	Black

DIMENSIONS



Example code for order: 90451.L005.H (DALI) + 3000 + 971400 + 940400 + 912400Z (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

TIG002EN01





REBA 35 LED ALUMINIUM PROFILE SYSTEMS

OPTIONS

Colour temperature



3000K
Tunable White

Order code
3000
T000

SwitchDIM Tunable White



SwitchDIM Tunable White

Order code
926600

Ceiling rose



Recessed
White
Black
Gray
Surface
White
Black
Gray

Order code
971400
971401
971402
971700
971701
971702

Current supply cable



1,5m transparent cable 0,75mm²
3 x 0,75 mm²
5 x 0,75 mm²

Order code
940400
940500

Suspension



Suspension type "I" (x2)
White
Black
Anodised

Order code
912400W
912400B
912400Z

Surface fixing



Surface fixing (x1)
Surface fixing (x2)

Order code
912500
912501

Low power version



Option supplied under request.

DETAILS



Clip-in diffuser system



Suspended version



End caps without visible screws

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

TIG02EN01






REBA 35 LED

ALUMINIUM PROFILE SYSTEMS

PHOTOMETRY



REBA 35 LED
L1128 bLINE 4000K

TO SPECIFY:

Linear surface or suspended LED luminaire individually mounted. Extruded aluminium profile, anodised in natural colour and 35mm width. Injected polycarbonate end caps, without visible screws and clip-in polycarbonate bLINE diffuser. Standard version with LED 4000K, CRI>80, MacAdam Step<3 and 80.000h lifetime (@L80, B10, Ta 25°C). Optional DALI dimmable LED driver, 3000K, Tunable White, suspension kit, transparent current supply cable and surface or recessed mounted ceiling rose - as Roxo Lighting REBA 35 LED.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.


TIG0002EN/01





REBA 35 LED Line

ALUMINIUM PROFILE SYSTEMS

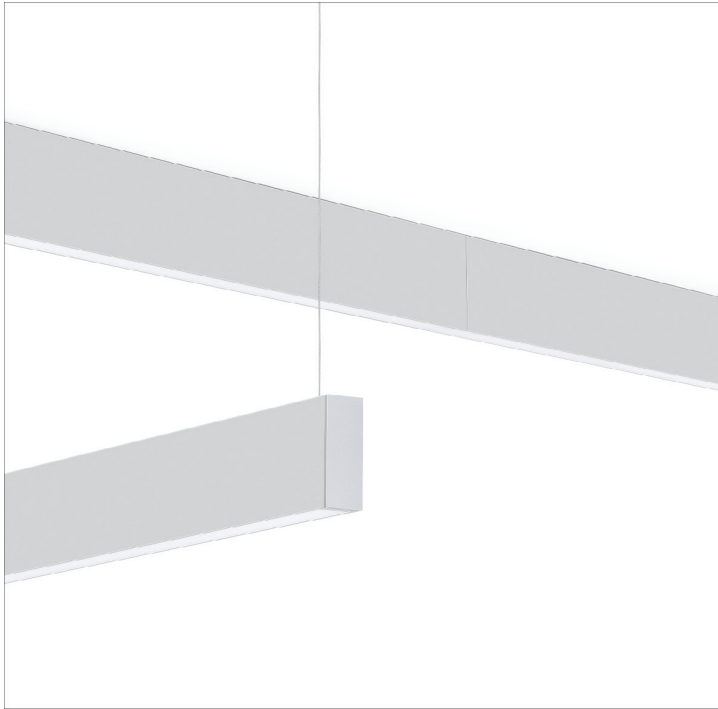

LED

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Private Houses, Art and Culture spaces, Offices, Public buildings, Hotel and Restaurant services.

Mounting: Surface/Suspended.

Light Distribution: Direct.

Light Source: LED 4000K, CRI>80, MacAdam Step<3, 80.000h life (@L80, B10, Ta 25°C).

Optical System: Diffuser: Opal polycarbonate.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Wiring: Through-wiring included.

Materials: Body: Extruded aluminium profile.

Surface Finish: Anodised in natural colour.

bLINE - Opal polycarbonate diffuser (middle)

LED	UGR	W	lm	lm/W	η(%)	AxBxC (mm)	kg	HF	DALI
	≤25	17	2494	87	59	562x50x100	1,7	90452.L002.E	90452.L002.H
	≤25	25	3741	87	58	842x35x100	2,3	90452.L003.E	90452.L003.H
	≤25	32	4988	92	59	1122x35x100	2,8	90452.L004.E	90452.L004.H
	≤25	40	6235	90	58	1402x35x100	3,3	90452.L005.E	90452.L005.H
	≤25	47	7482	91	57	1682x35x100	3,8	90452.L006.E	90452.L006.H
	-	57	8729	90	59	1964x35x100	4,6	90452.L007.E	90452.L007.H
	-	64	9976	92	59	2244x35x100	5,1	90452.L008.E	90452.L008.H
	-	72	11223	92	59	2524x35x100	5,6	90452.L009.E	90452.L009.H
	-	80	12470	90	58	2804x35x100	6,1	90452.L010.E	90452.L010.H

Add suffix to order: Start - 00000.0000.0.0049 End - 00000.0000.0.0050

Note:

- To complete the surface product add surface fixing. Please order separately.
- To complete the suspended product add suspension, current supply cable and ceiling rose. Please order separately.
- To complete a line, start kit will be necessary. Please order separately.
- Dimensions without end caps, please add 6mm to complete the line.
- Diffuser not included. Please order separately.
- Profile 562mm only available for end line.
- For the lines up till 13m length, the adequate cabling is a power-supply cable with 0,75mm² thickness. Please order separately.
- For the lines with length above 13m and below 30m, the adequate cabling is a power-supply cable with 1,5mm² thickness. Please order separately.

Example code for order: 90452.L005.E.0049 (START) + 90452.L005.E (MIDDLE) + 90452.L005.E.0050 (END) + 985605 + 3000 + 922910G + (2x)931910 + 971400 + 940400 + (2x) 912400Z(OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.






REBA 35 LED Line ALUMINIUM PROFILE SYSTEMS

COLOUR / FINISH


Code	Description
□ W	White
■ B	Black

DIMENSIONS

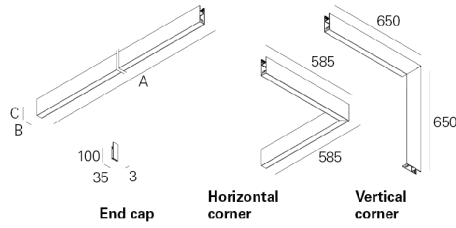

OPTIONS

bLINE diffuser



5m length
15m length
30m length

Order code
985605
985615
985630

Colour temperature



3000K
Tunable White

Order code
3000
T000


SwitchDIM Tunable White



SwitchDIM Tunable White

Order code
926600

Start Kit



Start Kit - Start / End
White
Black
Gray

• Two end caps included.

Order code
922910W
922910B
922910G

Body connector



Body connector

Order code
931910

Ceiling rose



Recessed
White
Black
Gray
Surface
White
Black
Gray

Order code
971400
971401
971402
971700
971701
971702

Current supply cable



1,5m transparent cable 0,75mm²
3 x 0,75 mm²
5 x 0,75 mm²
1,5m transparent cable 1,5mm²
3 x 1,5 mm²
5 x 1,5 mm²

Order code
940400
940500
940300
940000

Suspension



Suspension type "I" (x2)
White
Black
Anodised
Suspension type "I" for light corners (x2)
White
Black
Anodised

Order code
912400W
912400B
912400Z
912401W
912401B
912401Z

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

TFC002EN02





REBA 35 LED Line ALUMINIUM PROFILE SYSTEMS

Surface fixing



Surface fixing (x1)
Surface fixing (x2)

Order code
912500
912501

Blank parts



1,5m length
Start/Middle
End

Order code
992810
992811

3m length
Start/Middle
End

992820
992821

Light corners



Horizontal corner
32W HF
32W DALI
Vertical corner
32W HF
32W DALI

Order code
90452.H202.E
90452.H202.H
90452.V202.E
90452.V202.H

• LED light corner luminaire includes complete gear tray with non-Dimmable or DALI LED driver and polycarbonate diffuser.

Low power version



Option supplied under request.

Bespoke projects



Option supplied under request.

DETAILS



Clip-in diffuser system




Suspension detail




End caps without visible screws


PHOTOMETRY



REBA 35 LED Line
L1122 bLINE 4000K SRT



REBA 35 LED Line
L1122 bLINE 4000K MID



REBA 35 LED Line
L1122 bLINE 4000K END

TO SPECIFY:

Linear surface or suspended LED luminaire, for continuous line. Extruded aluminium profile, anodised in natural colour and 35mm width. Injected polycarbonate end caps, without visible screws, and clip-in polycarbonate bLINE diffuser with up till 30m length in one single piece. Standard version with LED 4000K, CRI>80, MacAdam Step<3 and 80.000h lifetime (@L80, B10, Ta 25°C). Optional DALI dimmable LED driver, 3000K, Tunable White, suspension kit, transparent current supply cable and surface or recessed mounted ceiling rose. - as Roxo Lighting REBA 35 LED Line.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

TI600ZEN/02

