




REBA 35 LED

ALUMINIUM PROFILE SYSTEMS

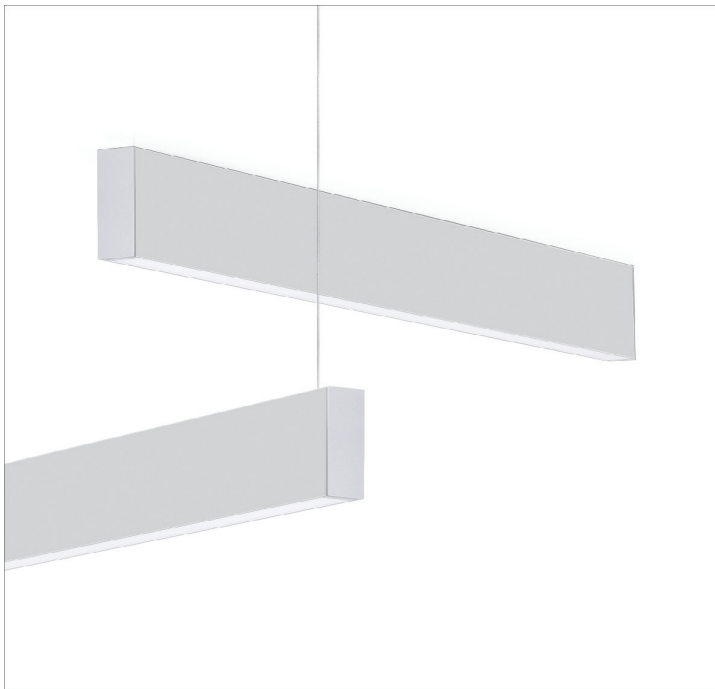

LED

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Private Houses, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting: Surface/Suspended.

Light Distribution: Direct.

Light Source: LED 4000K, CRI>80, MacAdam Step<3, 80.000h life (@L80, B10, Ta 25°C).

Optical System: Diffuser: Opal polycarbonate.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Extruded aluminium profile.

Surface Finish: Anodised in natural colour.

bLINE - Opal polycarbonate diffuser


LED	UGR	W	lm	lm/W	η(%)	AxBxC (mm)	kg	HF	DALI
	≤25	25	3741	87	58	848x35x100	2,3	90451.L003.E	90451.L003.H
	≤25	32	4988	92	59	1128x35x100	2,8	90451.L004.E	90451.L004.H
	≤25	40	6235	90	58	1408x35x100	3,3	90451.L005.E	90451.L005.H
	≤25	47	7482	91	57	1688x35x100	3,9	90451.L006.E	90451.L006.H
-	-	57	8729	90	59	1970x35x100	4,6	90451.L007.E	90451.L007.H
-	-	64	9976	92	59	2250x35x100	5,2	90451.L008.E	90451.L008.H
-	-	72	11223	92	59	2530x35x100	5,7	90451.L009.E	90451.L009.H
-	-	80	12470	90	58	2810x35x100	6,3	90451.L010.E	90451.L010.H

- Note:
- To complete the surface product add surface fixing. Please order separately.
 - To complete the suspended product add suspension, current supply cable and ceiling rose. Please order separately.

COLOUR / FINISH

Code	Description
□ W	White
■ B	Black

DIMENSIONS



Example code for order: 90451.L005.H (DALI) + 3000 + 971400 + 940400 + 912400Z (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

TIG002EN01





REBA 35 LED ALUMINIUM PROFILE SYSTEMS

OPTIONS

Colour temperature



3000K
Tunable White

Order code
3000
T000

SwitchDIM Tunable White



SwitchDIM Tunable White

Order code
926600

Ceiling rose



Recessed
White
Black
Gray
Surface
White
Black
Gray

Order code
971400
971401
971402
971700
971701
971702

Current supply cable



1,5m transparent cable 0,75mm²
3 x 0,75 mm²
5 x 0,75 mm²

Order code
940400
940500

Suspension



Suspension type "I" (x2)
White
Black
Anodised

Order code
912400W
912400B
912400Z

Surface fixing



Surface fixing (x1)
Surface fixing (x2)

Order code
912500
912501

Low power version



Option supplied under request.

DETAILS



Clip-in diffuser system



Suspended version



End caps without visible screws

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

TIG02EN01






REBA 35 LED

ALUMINIUM PROFILE SYSTEMS

PHOTOMETRY



REBA 35 LED
L1128 bLINE 4000K

TO SPECIFY:

Linear surface or suspended LED luminaire individually mounted. Extruded aluminium profile, anodised in natural colour and 35mm width. Injected polycarbonate end caps, without visible screws and clip-in polycarbonate bLINE diffuser. Standard version with LED 4000K, CRI>80, MacAdam Step<3 and 80.000h lifetime (@L80, B10, Ta 25°C). Optional DALI dimmable LED driver, 3000K, Tunable White, suspension kit, transparent current supply cable and surface or recessed mounted ceiling rose - as Roxo Lighting REBA 35 LED.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

TIG0002EN/01

