




REBA 35 D/I LED

ALUMINIUM PROFILE SYSTEMS

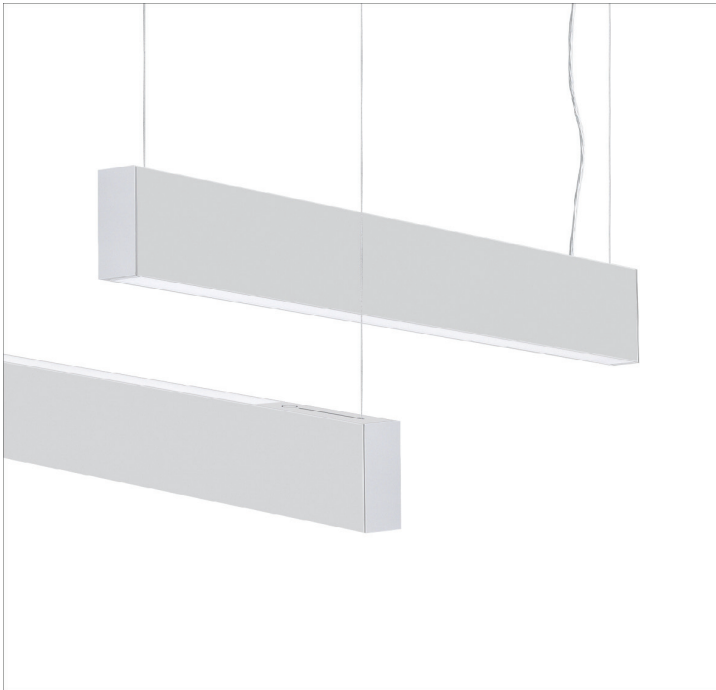

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Private Houses, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting:	Suspended.
Light Distribution:	Direct / Indirect.
Light Source:	LED 4000K, CRI>80, MacAdam Step<3, 80.000h life (@L80, B10, Ta 25°C).
Optical System:	Diffuser: Opal polycarbonate.
Control Gear:	LED driver, 220-240VAC-50/60Hz.
Materials:	Body: Extruded aluminium profile.
Surface Finish:	Anodised in natural colour.

bLINE - Opal polycarbonate diffuser


LED	UGR	W	Lm	Lm/W	η(%)	AxBxC (mm)	kg	HF	DALI
	≤22	57	8729	98	64	1128x35x100	3,5	90453.L004.E	90453.L004.H
	≤22	72	11223	101	65	1408x35x100	4,1	90453.L005.E	90453.L005.H
	≤22	87	13717	99	63	1688x35x100	4,8	90453.L006.E	90453.L006.H
	-	111	17458	101	64	2250x35x100	6,4	90453.L008.E	90453.L008.H
	-	129	19952	101	65	2530x35x100	7,2	90453.L009.E	90453.L009.H
	-	144	22446	101	65	2810x35x100	8,0	90453.L010.E	90453.L010.H

Note:
• To complete the product add suspension, current supply cable and ceiling rose. Please order separately.

COLOUR / FINISH

Code	Description
W	White
B	Black

DIMENSIONS



Example code for order: 90453.L005.E (HF) + 3000 + 971400 + 940400 + 912400Z (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

T10002EN/01





REBA 35 D/I LED ALUMINIUM PROFILE SYSTEMS

OPTIONS

Colour temperature



3000K
Tunable White

Order code
3000
T000

SwitchDIM Tunable White



SwitchDIM Tunable White

Order code
926600

Ceiling rose



Recessed
White
Black
Gray
Surface
White
Black
Gray

Order code

971400
971401
971402

971700
971701
971702

Current supply cable



1,5m transparent cable 0,75mm²
3 x 0,75 mm²
5 x 0,75 mm²

Order code

940400
940500

Suspension



Suspension type "I" (x2)
White
Black
Anodised

Order code

912400W
912400B
912400Z

Low power version



Option supplied under request.

DETAILS



Clip-in diffuser system




Suspended version



End caps without visible screws

PHOTOMETRY



REBA 35 D/I LED
L1128 bLINE 4000K

TO SPECIFY:

Linear suspended LED luminaire, with direct and indirect light, individually mounted. Extruded aluminium profile, anodised in natural colour and 35mm width. Injected polycarbonate end caps, without visible screws, and clip-in polycarbonate bLINE diffuser. Standard version with LED 4000K, CRI>80, MacAdam Step<3 and 80.000h lifetime (@L80, B10, Ta 25°C). Optional DALI dimmable LED driver, 3000K, Tunable White, suspension kit, transparent current supply cable and surface or recessed mounted ceiling rose. - as Roxo Lighting REBA 35 D/I LED.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

T160202EN01

