



Architectural  
lighting

# ROFY



**ROFY 60 / T**  
166



**ROFY 60 / T D/I**  
168



**ROFY 60**  
172



**ROFY 60 D/I**  
176



**ROFY 85 / E**  
180



**ROFY 85**  
182



**ROFY 85 D/I**  
186



**ROFY 85 IP / E**  
190



**ROFY 85 IP / C**  
192





## Application types





---

**1. Recessed  
with trim/frame**

---

**2. Trimless  
Direct**

---

**3. Trimless  
Direct / Indirect**

---

---

**4. Wall mounted  
Direct**

---

**5. Wall mounted  
Direct / Indirect**

---

**6. Surface mounted  
Direct**

---

---

**7. Surface mounted  
Direct / Indirect**

---

**8. Suspended  
Direct**

---

**9. Suspended  
Direct / Indirect**

---





## Two available versions



ROFY 60






ARCHITECTURAL  
LIGHTING



ROFY 85



85 mm






# Optical system



ARCHITECTURAL  
LIGHTING

Scale 1:1

## 1. gCONTROL+



## 2. LIGHT+

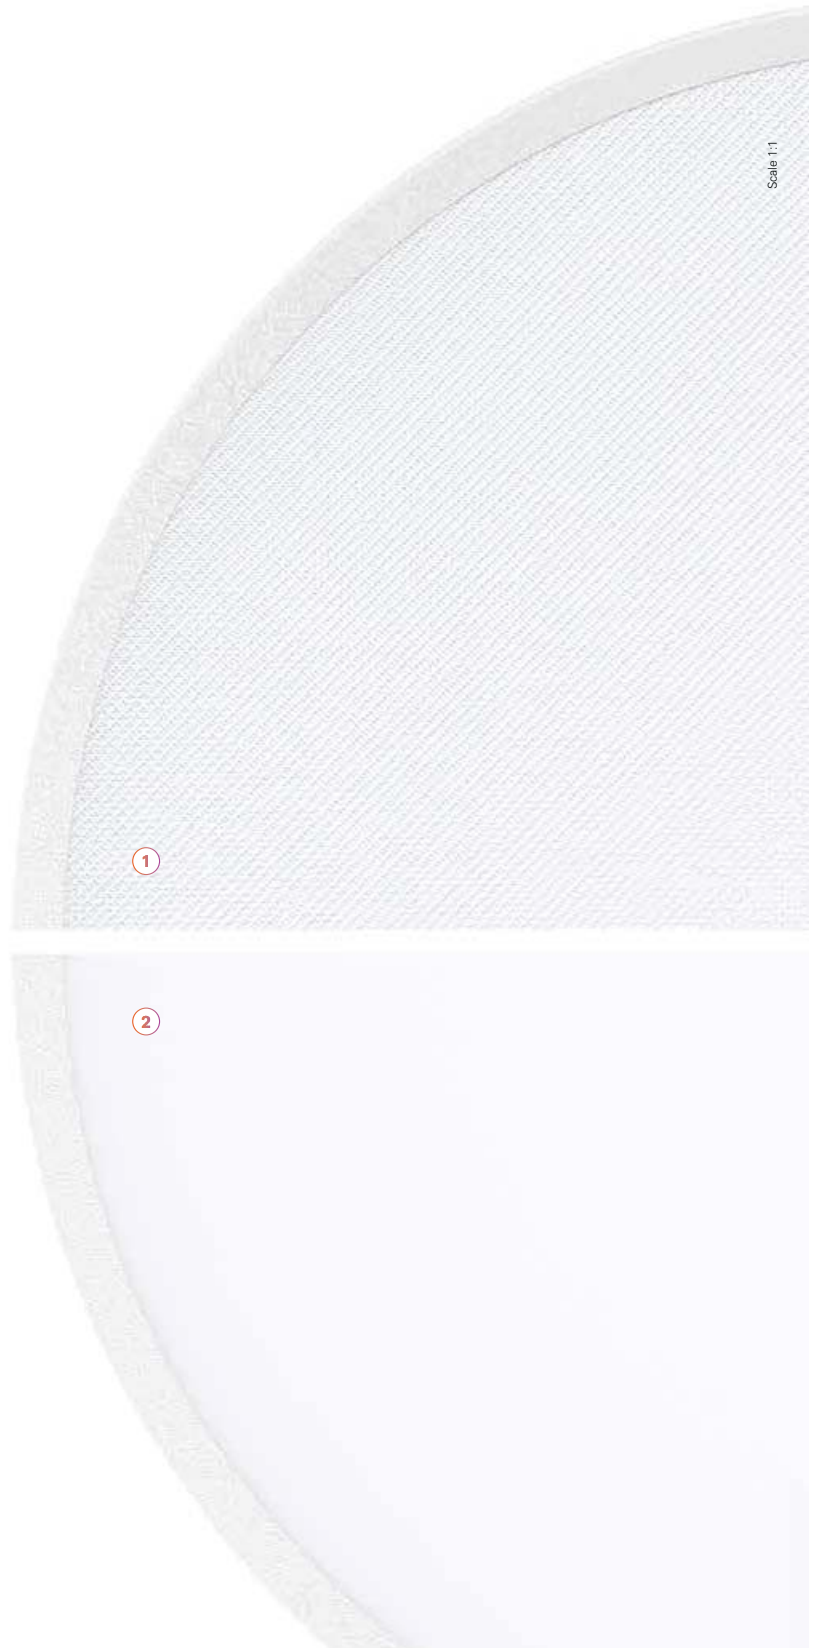



## Minimalism and technology

### 1. Body

Seamlessly welded aluminium profile, available in 12 colours.

### 2. LED

SDCM MacAdam  $\leq 3$ , 3000K / 4000K colour temperature, CRI > 80 and 80.000h lifetime L90 B10.

### 3. Tunable White

Tunable White versions available with a white light spectrum from 2700K to 6500K. Available from  $\varnothing 400$  mm.



### 4. gCONTROL+ or LIGHT+

High-tech optical system with LIGHT+ opal version to ensure smooth and uniform light, or gCONTROL+ microprismatic version for high visual comfort (UGR < 19) and without visible spots).



### 5. HPR

Internal high-performance reflector to ensure high efficiency and smooth and uniform light.

### 6. Indirect light


Direct / indirect version with 80% / 20% light ratio and opal diffuser for light uniformity on the ceiling.



### 7. HF or dimmable DALI driver

### 8. Suspension and current supply cable

Thanks to a wide range of suspensions and ceiling roses, you can select a very minimalist and discrete suspension. The central suspension allows the luminaire to subtly integrate into any project. Suspensions and power cable available in 1500, 3000 or 6000 mm length.

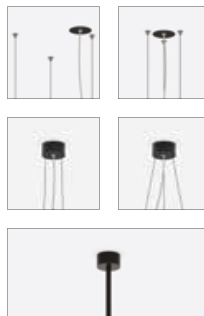

### 9. Ceiling rose

Recessed, surface mounted or central ceiling roses, available in white or black colour.



### 10. Emergency unit

3h emergency unit. Available from  $\approx 600$  to  $\approx 1150$  mm.


### 11. IP version

Available with water and dust protection index IP54.





ARCHITECTURAL  
LIGHTING

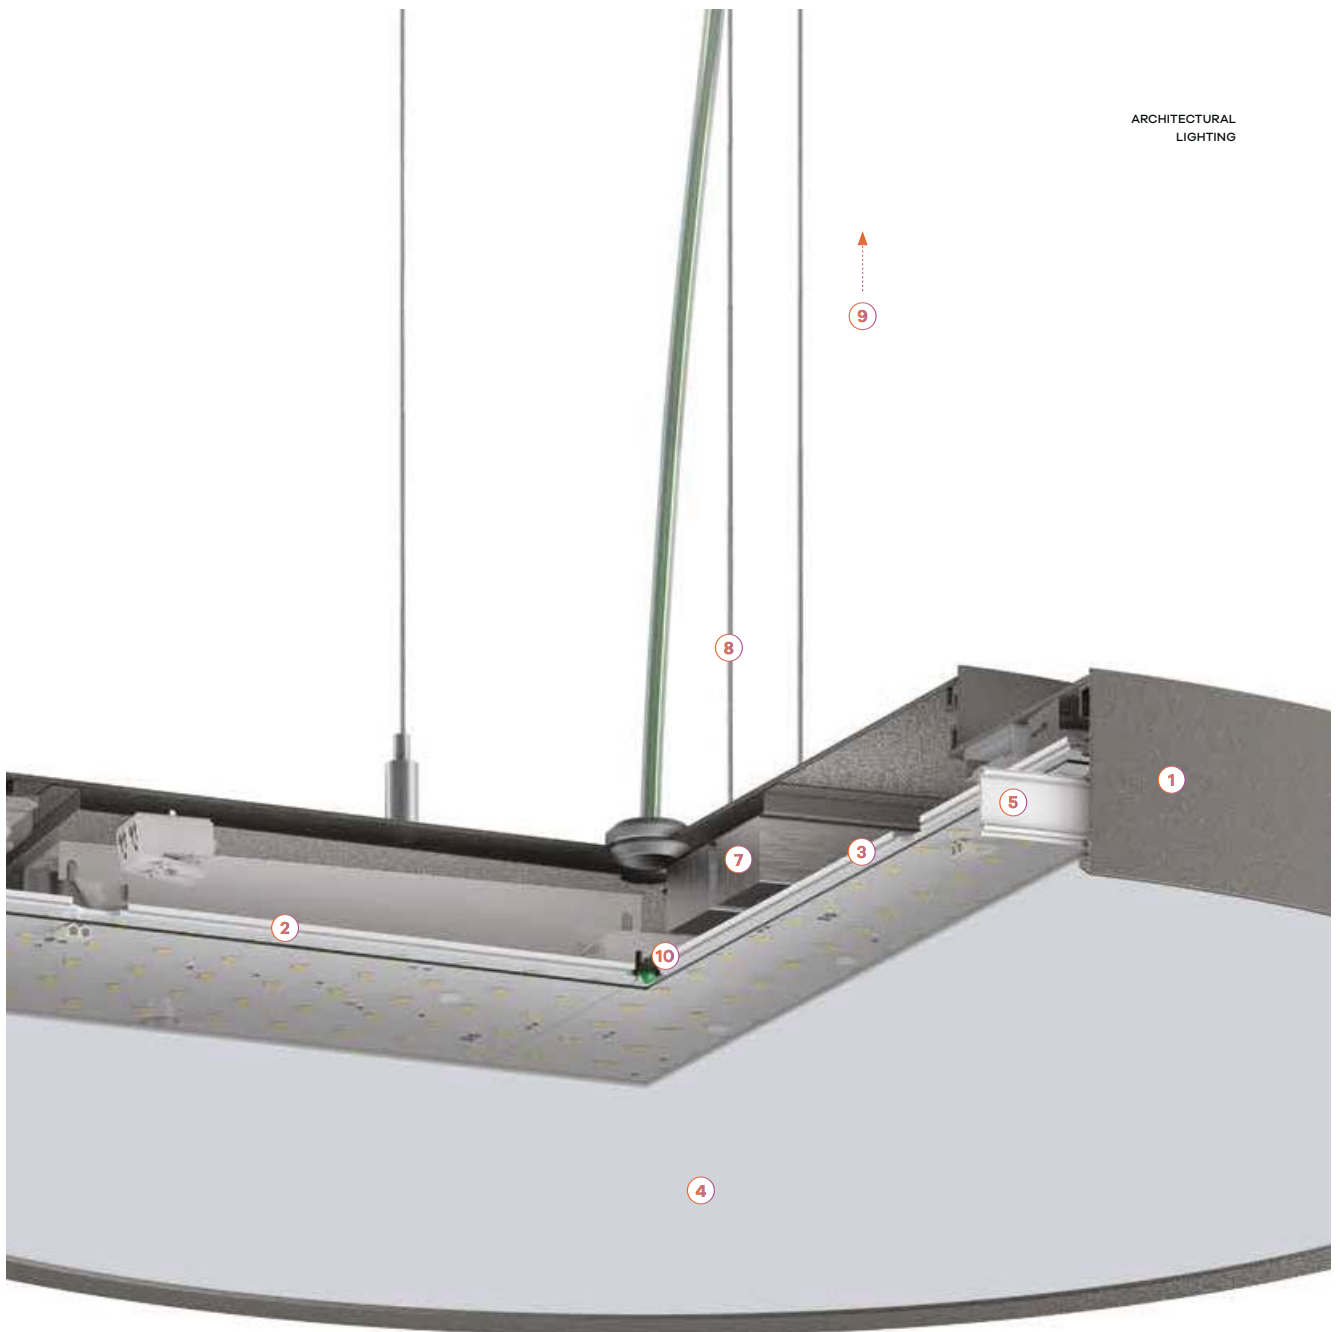





# Define your colour

ARCHITECTURAL  
LIGHTING

