





Architectural  
lighting


# ROFY



**ROFY 60 / T**  
166



**ROFY 60 / T D/I**  
168



**ROFY 60**  
172



**ROFY 60 D/I**  
176



**ROFY 85 / E**  
180



**ROFY 85**  
182



**ROFY 85 D/I**  
186



**ROFY 85 IP / E**  
190



**ROFY 85 IP / C**  
192





## Application types





1. Recessed  
with trim/frame

2. Trimless  
Direct

3. Trimless  
Direct / Indirect

4. Wall mounted  
Direct

5. Wall mounted  
Direct / Indirect

6. Surface mounted  
Direct

7. Surface mounted  
Direct / Indirect

8. Suspended  
Direct

9. Suspended  
Direct / Indirect





## Two available versions



ROFY 60





ARCHITECTURAL  
LIGHTING



ROFY 85



85 mm








# Optical system



ARCHITECTURAL  
LIGHTING

Scale 1:1

## 1. gCONTROL+

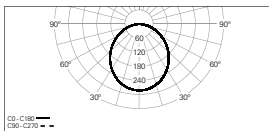

## 2. LIGHT+







## Minimalism and technology

### 1. Body

Seamlessly welded aluminium profile, available in 12 colours.

### 2. LED

SDCM MacAdam  $\leq 3$ , 3000K / 4000K colour temperature, CRI $>80$  and 80.000h lifetime L90 B10.

### 3. Tunable White

Tunable White versions available with a white light spectrum from 2700K to 6500K. Available from  $\varnothing 400$  mm.



### 4. gCONTROL+ or LIGHT+

High-tech optical system with LIGHT+ opal version to ensure smooth and uniform light, or gCONTROL+ microprismatic version for high visual comfort (UGR  $<19$ ) and without visible spots).



### 5. HPR

Internal high-performance reflector to ensure high efficiency and smooth and uniform light.

### 6. Indirect light


Direct / indirect version with 80% / 20% light ratio and opal diffuser for light uniformity on the ceiling.



### 7. HF or dimmable DALI driver

### 8. Suspension and current supply cable

Thanks to a wide range of suspensions and ceiling roses, you can select a very minimalist and discrete suspension. The central suspension allows the luminaire to subtly integrate into any project. Suspensions and power cable available in 1500, 3000 or 6000 mm length.

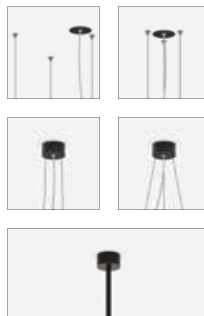

### 9. Ceiling rose

Recessed, surface mounted or central ceiling roses, available in white or black colour.



### 10. Emergency unit

3h emergency unit. Available from  $\approx 600$  to  $\approx 1150$  mm.


### 11. IP version

Available with water and dust protection index IP54.






ARCHITECTURAL  
LIGHTING

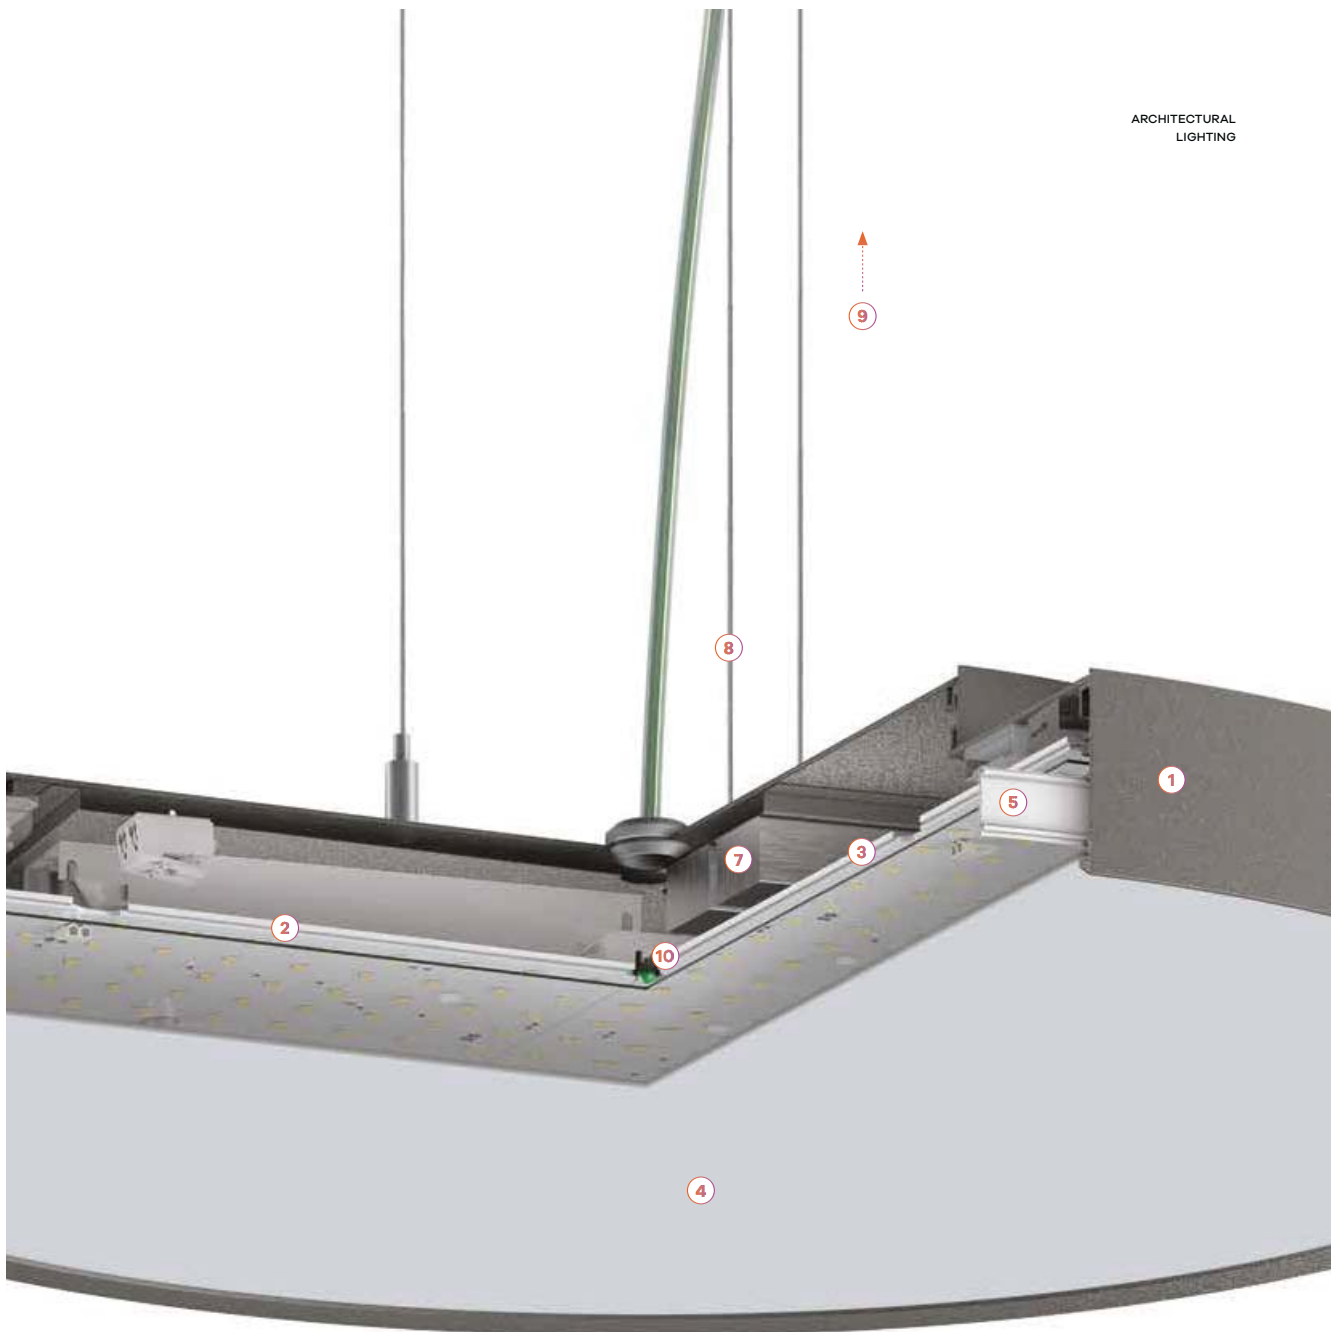



# Define your colour

ARCHITECTURAL  
LIGHTING

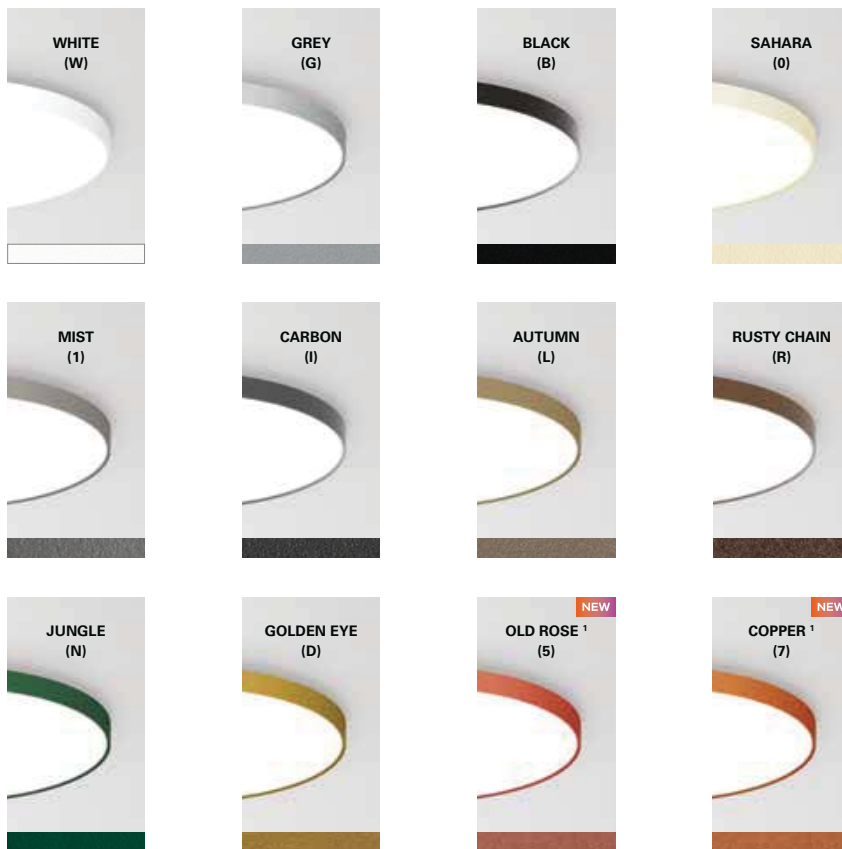





ARCHITECTURAL  
LIGHTING

## ROFY 60 /T



### Product characteristics

**Body**

Aluminium

**Finish**

Powder coated

**Optical system**

gCONTROL+ - Microprismatic diffuser  
LIGHT+ - Opal diffuser

**Light source**

LED, RG1, CRI>80, MacAdam Step ≤3

**LED lifetime**

80.000h @ L90, B10, Ta 25°C

**Control gear**

LED driver 220-240V-50/60Hz included

**Ceiling thickness**

For ceilings between 9,5-18 mm






## 01. Select version

### ROFY 60 /T




#### gCONTROL+ - Microprismatic diffuser



UGR	W	lm output	lm/W	Dmm	Ø	Ø	CODE*
≤22	16	1945	122	Ø300	Ø331		90559L300▼▲◆◆00
≤22	24	3085	129	Ø400	Ø427		90559L400▼▲◆◆00
≤19	43	5939	138	Ø600	Ø630		90559L600▼▲◆◆00
≤19	65	8844	136	Ø900	Ø927		90559L900▼▲◆◆00
≤19	107	14432	135	Ø1150	Ø1179		90559L115▼▲◆◆00

#### LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	Dmm	Ø	Ø	CODE*
≤22	16	2135	133	Ø300	Ø331		90561L300▼▲◆◆00
≤25	24	3385	141	Ø400	Ø427		90561L400▼▲◆◆00
≤22	43	6516	152	Ø600	Ø630		90561L600▼▲◆◆00
≤22	65	9704	149	Ø900	Ø927		90561L900▼▲◆◆00
≤22	107	15835	148	Ø1150	Ø1179		90561L115▼▲◆◆00

### ROFY 60 /T

- This product cannot be installed on the wall.



\*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H

Colour 1	
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D

Emergency	
No EM	0
EM 3h (K3) 2	3

Colour temp.	
3000K	3
4000K	0
Tunable White 3	T

## 02. Select options

### OPTIONS Code


**Steel safety cable**  
L1500 mm 955000

#### Low Output version

- Under request.



### Product details



Trimless application



gCONTROL+ diffuser



LIGHT+ diffuser





ARCHITECTURAL  
LIGHTING

## ROFY 60 /T D/I



### Product characteristics

**Body**

Aluminium

**Finish**

Powder coated

**Optical system**

gCONTROL+ - Microprismatic diffuser  
LIGHT+ - Opal diffuser

**Light source**

LED, RG1, CRI>80, MacAdam Step ≤3

**LED lifetime**

80.000h @ L90, B10, Ta 25°C

**Control gear**

LED driver 220-240V-50/60Hz included

**Ceiling thickness**


For ceilings between 9,5-18 mm






## 01. Select version

### ROFY 60 / T D/I




#### gCONTROL+ - Microprismatic diffuser (80%/20%)



UGR	W	lm output	lm/W	Dmm	Φ	CODE*
≤19	32	3683	115	Ø400	Ø523	90591L400▼▲0♦00
≤19	56	6869	123	Ø600	Ø723	90591L600▼▲0♦00
≤19	84	10270	122	Ø900	Ø1023	90591L900▼▲0♦00
≤19	137	16846	123	Ø1150	Ø1273	90591L115▼▲0♦00

#### LIGHT+ - Opal diffuser (80%/20%)



UGR	W	lm output	lm/W	Dmm	Φ	CODE*
≤22	32	3851	120	Ø400	Ø523	90593L400▼▲0♦00
≤22	56	7182	128	Ø600	Ø723	90593L600▼▲0♦00
≤22	84	10736	128	Ø900	Ø1023	90593L900▼▲0♦00
≤22	137	17612	129	Ø1150	Ø1273	90593L115▼▲0♦00

### ROFY 60 / T D/I

• This product cannot be installed on the wall.



\*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H

Colour 1	
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D

Emergency	
No EM	0
EM 3h (K3) 2	3

Colour temp.	
3000K	3
4000K	0
Tunable White	T

## 02. Select options

### OPTIONS Code

#### Tilted bracket

Ø400 mm	927100
Ø600 mm	927101
Ø900 mm	927102
Ø1150 mm	927103

#### Steel safety cable

L1500 mm	955000
----------	--------

#### Low Output version

• Under request.



### Product details



Trimless application



Tilted bracket




gCONTROL+ diffuser



LIGHT+ diffuser





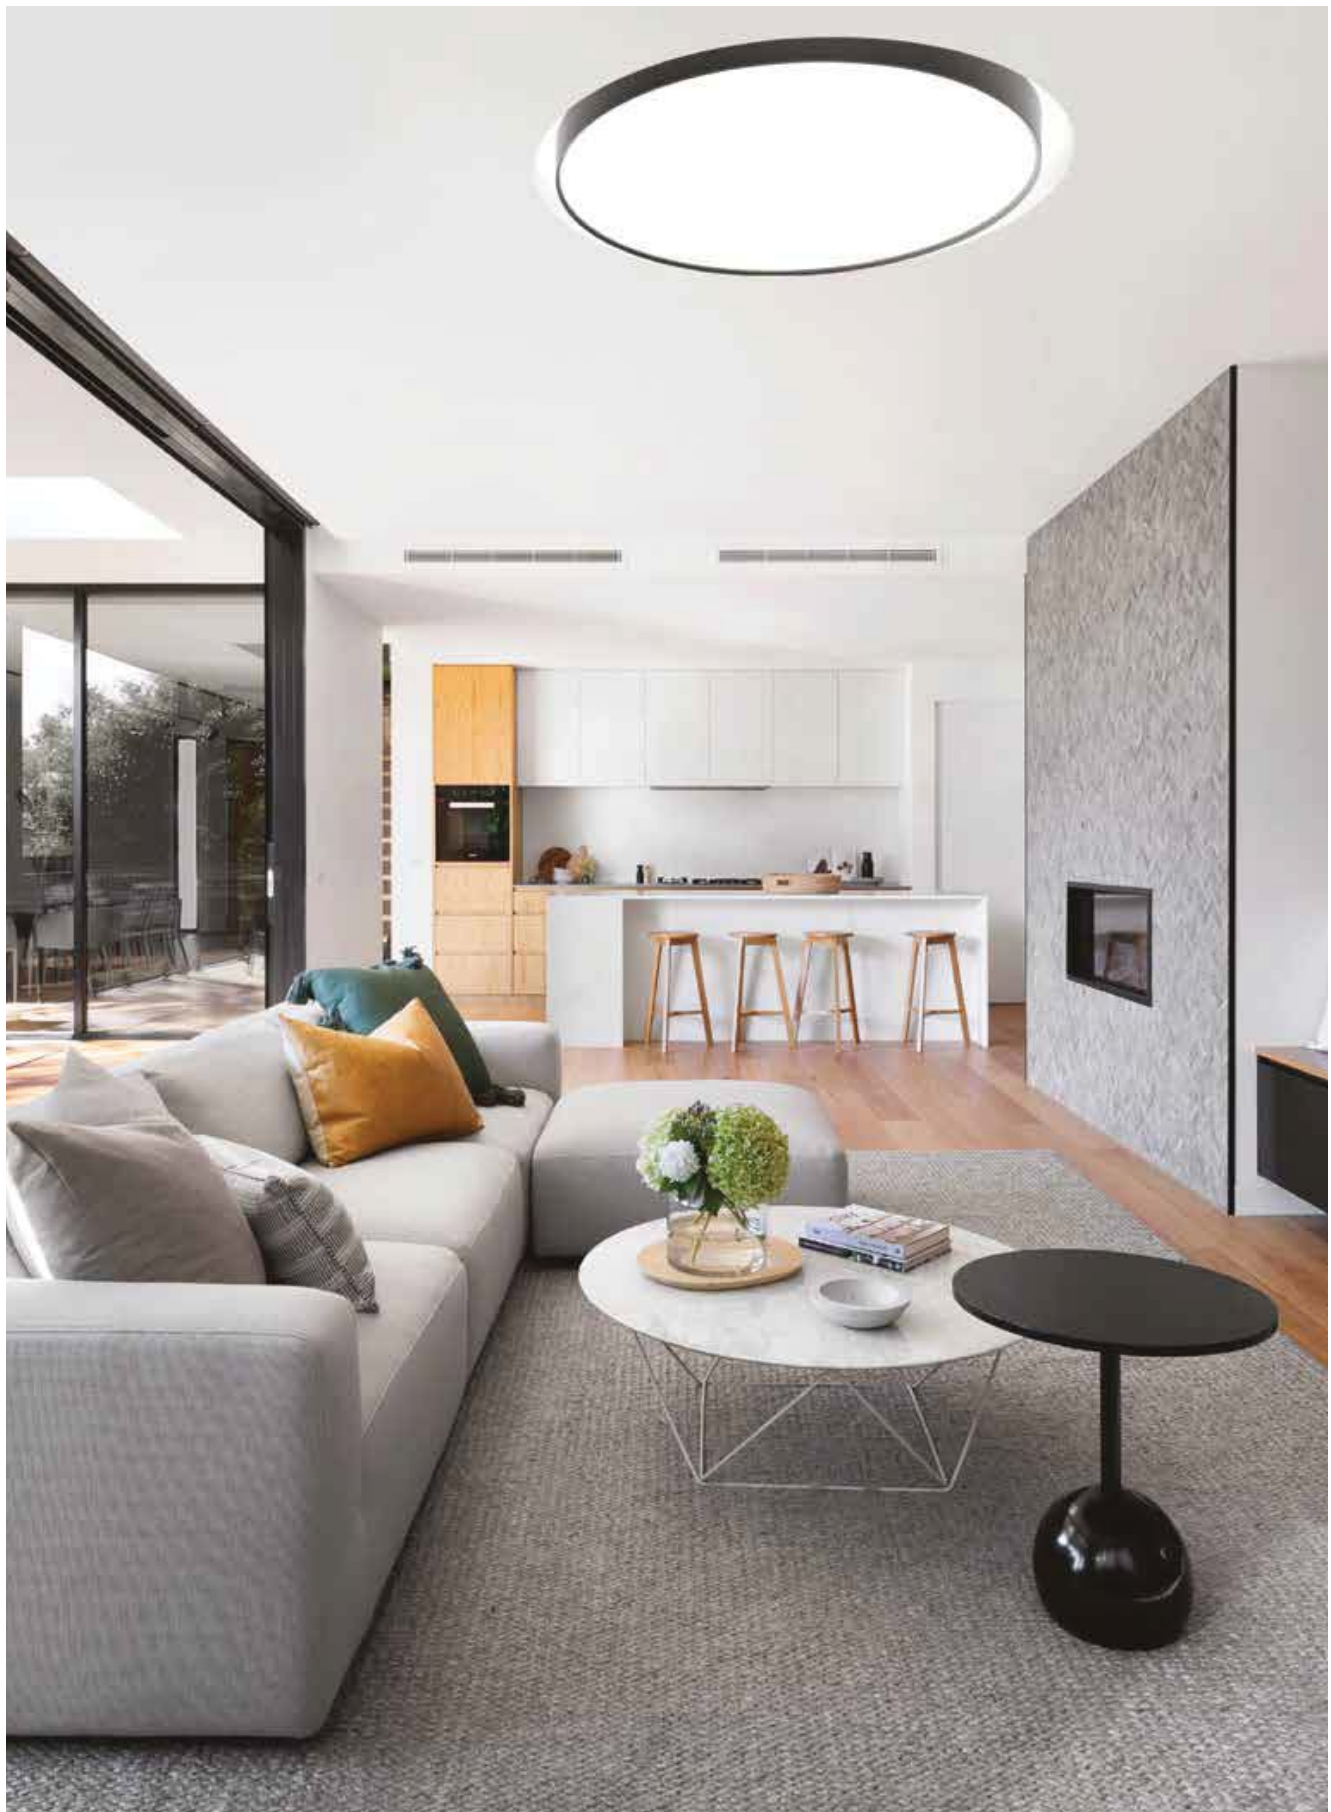





ARCHITECTURAL  
LIGHTING

## ROFY 60



### Product characteristics

#### Body

Aluminium

#### Finish

Powder coated

#### Optical system

gCONTROL+ - Microprismatic diffuser  
LIGHT+ - Opal diffuser

#### Light source

LED, RG1, CRI>80, MacAdam Step  $\leq 3$

#### LED lifetime

80.000h @ L90, B10, Ta 25°C

#### Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz



IP 40

IK 04


650°C






## 01. Select version

### ROFY 60




#### gCONTROL+ - Microprismatic diffuser



UGR	W	lm output	lm/W	Dmm	CODE*
≤22	16	1945	122	Ø300	90583L300♥♣♦00
≤22	24	3085	129	Ø400	90583L400♥♣♦00
≤19	43	5939	138	Ø600	90583L600♥♣♦00
≤19	65	8844	136	Ø900	90583L900♥♣♦00
≤19	107	14432	135	Ø1150	90583L115♥♣♦00

#### LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	Dmm	CODE*
≤22	16	2135	133	Ø300	90585L300♥♣♦00
≤25	24	3385	141	Ø400	90585L400♥♣♦00
≤22	43	6516	152	Ø600	90585L600♥♣♦00
≤22	65	9704	149	Ø900	90585L900♥♣♦00
≤22	107	15835	148	Ø1150	90585L115♥♣♦00

### ROFY 60

- For suspended version add current supply cable, suspension and ceiling rose. Please order separately.



\*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H

Colour 1	
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D
Old rose	5
Copper	7

Emergency	
No EM	0
EM 3h (K3) 2	3

Colour temp.	
3000K	3
4000K	0
Tunable White 3	T



## 02. Select options

### OPTIONS Code\*

#### Suspension


S10 L1500 mm (x3)	9111001
S10 L3000 mm (x3)	9111002
S10 L6000 mm (x3)	9111003


#### Transparent current supply cable

L1500 mm - 3 x 0,75 mm <sup>2</sup>	940400
L1500 mm - 5 x 0,75 mm <sup>2</sup>	940500
L1500 mm - 7 x 0,75 mm <sup>2</sup>	940600
L3000 mm - 3 x 0,75 mm <sup>2</sup>	940401
L3000 mm - 5 x 0,75 mm <sup>2</sup>	940501
L3000 mm - 7 x 0,75 mm <sup>2</sup>	940601
L6000 mm - 3 x 0,75 mm <sup>2</sup>	940402
L6000 mm - 5 x 0,75 mm <sup>2</sup>	940507
L6000 mm - 7 x 0,75 mm <sup>2</sup>	940602


• For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm<sup>2</sup>.

#### Round ceiling rose

Surface mounted T24	45 l		Ø95	978600♣
Surface mounted T26 (DALI+K3)				978601♣


Recessed T5	Ø70	33 l		Ø90	971300♣
Recessed T27 (DALI+K3)					978700♣

#### Central ceiling rose

Surface mounted T21	45 l		Ø95	977211♣
Surface mounted T28 (DALI+K3)				977230♣

#### Suspension rod

D95 - Ø400, Ø600 mm	913000♣
D120 - Ø900, Ø1150 mm	913010♣

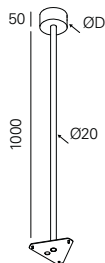

#### Low Output version

• Under request.




\*Replace the symbols to complete the code

<b>Colour</b>	♣
<input type="checkbox"/> White	W
<input checked="" type="checkbox"/> Black	B



### Product details



Ceiling surface application



Suspended application



Wall mounted



gCONTROL+ diffuser



LIGHT+ diffuser



Outer parallel suspension



Inner parallel suspension




Outer central suspension



Inner central suspension



Suspension rod

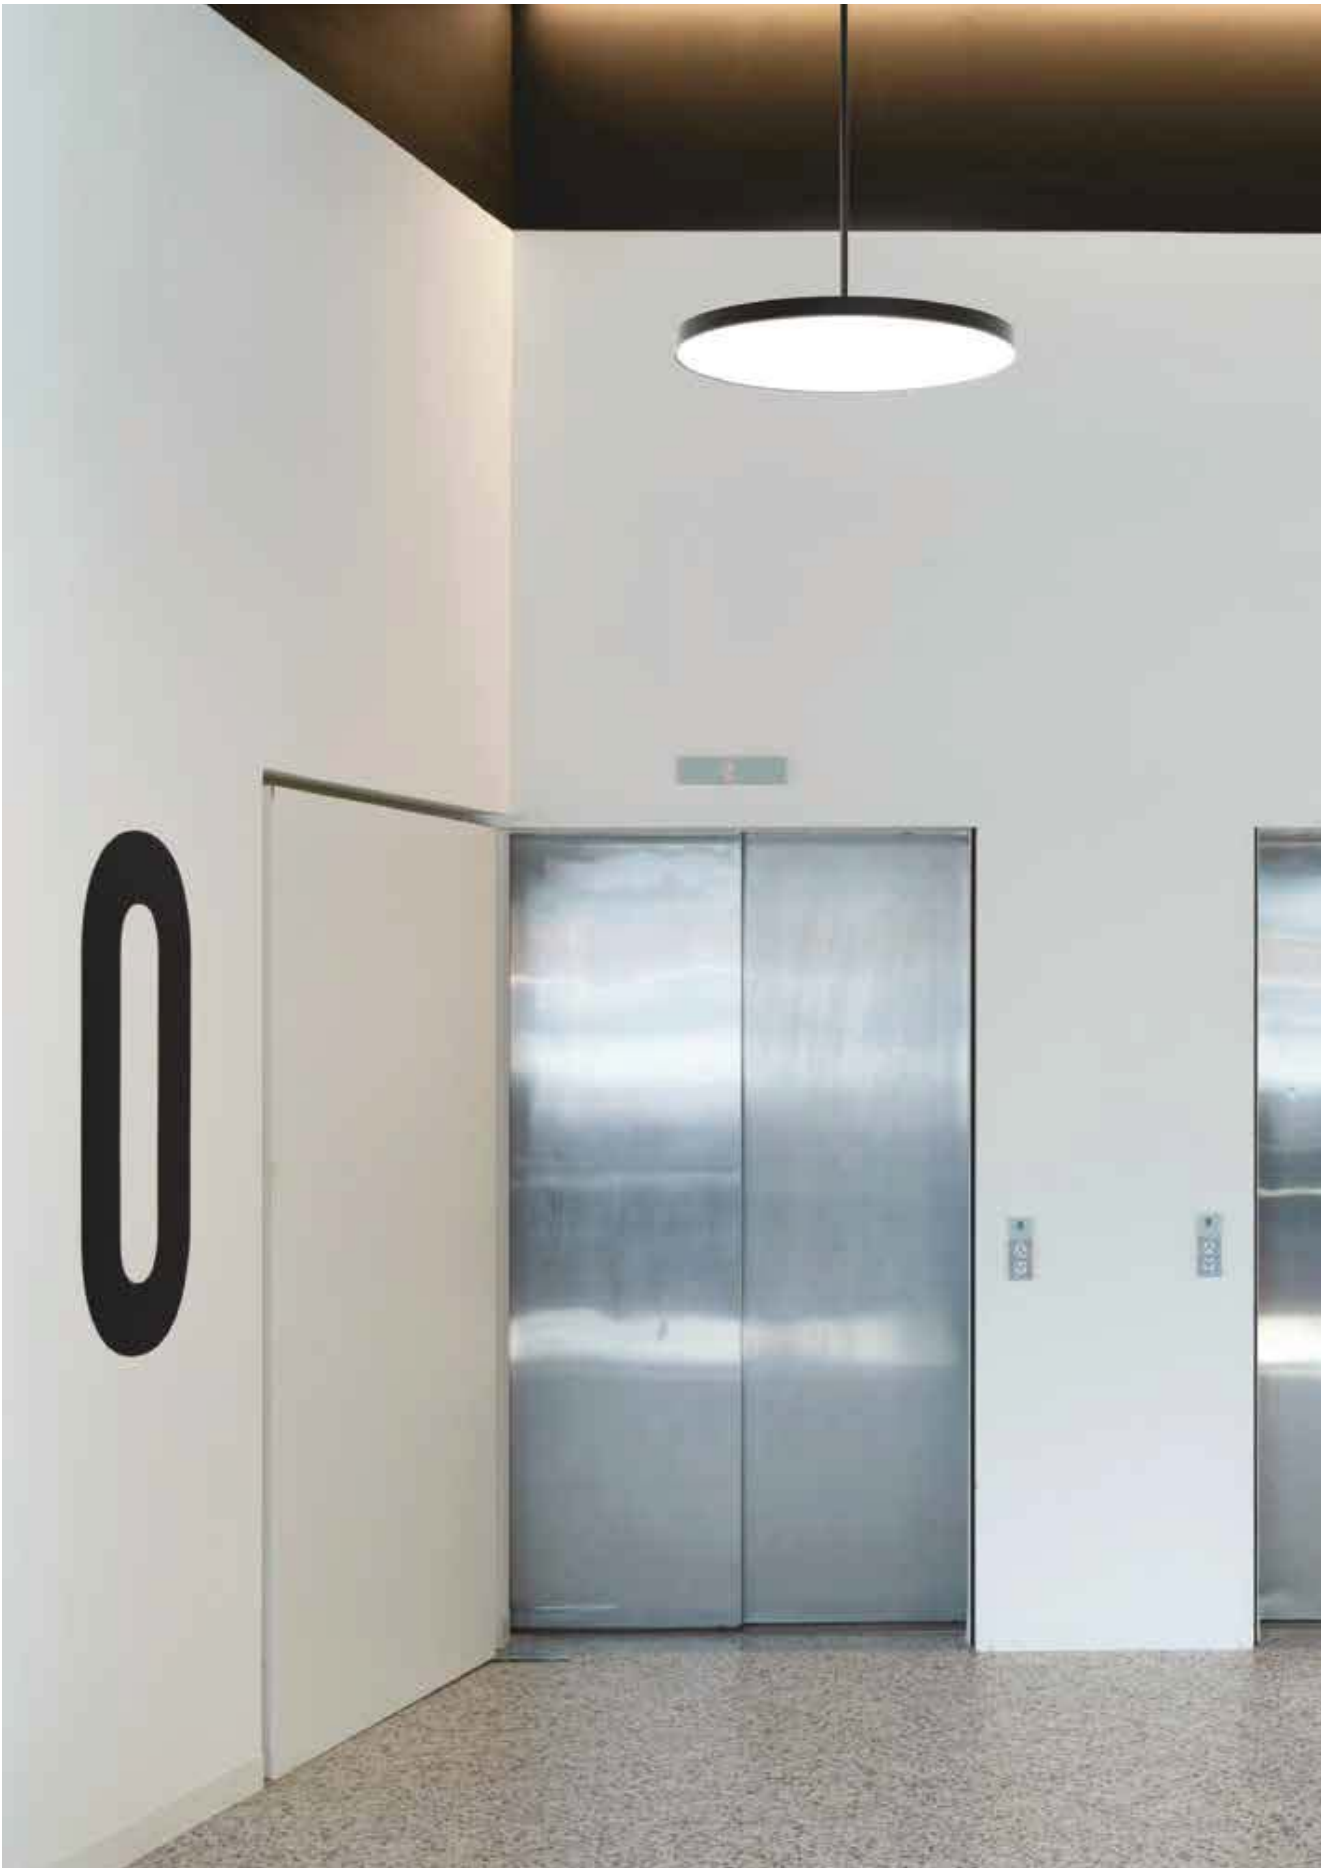



ARCHITECTURAL  
LIGHTING

## ROFY 60 D/I



### Product characteristics

**Body**

Aluminium

**Finish**

Powder coated

**Optical system**

gCONTROL+ - Microprismatic diffuser  
LIGHT+ - Opal diffuser

**Light source**


LED, RG1, CRI>80, MacAdam Step ≤3

**LED lifetime**

80.000h @ L90, B10, Ta 25°C

**Control gear**

LED driver 220-240V-50/60Hz included







## 01. Select version

### ROFY 60 D/I

25  
601




#### gCONTROL+ - Microprismatic diffuser (80%/20%)



UGR	W	lm output	lm/W	Dmm	CODE*
≤19	32	3907	122	Ø400	90587L400♥♣♦0♦00
≤19	56	7286	130	Ø600	90587L600♥♣♦♦♦00
≤19	84	10892	130	Ø900	90587L900♥♣♦♦♦00
≤19	137	17867	130	Ø1150	90587L115♥♣♦♦♦00

#### LIGHT+ - Opal diffuser (80%/20%)



UGR	W	lm output	lm/W	Dmm	CODE*
≤22	32	4242	133	Ø400	90589L400♥♣♦♦♦00
≤22	56	7910	141	Ø600	90589L600♥♣♦♦♦00
≤22	84	11826	141	Ø900	90589L900♥♣♦♦♦00
≤22	137	19398	142	Ø1150	90589L115♥♣♦♦♦00

### ROFY 60 D/I

- For suspended version add current supply cable, suspension and ceiling rose. Please order separately.
- In order to guarantee total light uniformity on the ceiling in the suspended version, installation must be carried out at a minimum distance of 500 mm.



\*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour <sup>1</sup>	♣
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D
Old rose	5
Copper	7

Emergency	●
No EM	0
EM 3h (K3) <sup>2</sup>	3

Colour temp.	♦
3000K	3
4000K	0
Tunable White	T







## 02. Select options

### OPTIONS Code\*

#### Suspension

S10 L1500 mm (x3)	9111001
S10 L3000 mm (x3)	9111002
S10 L6000 mm (x3)	9111003

#### Transparent current supply cable

L1500 mm - 3 x 0,75 mm <sup>2</sup>	940400
L1500 mm - 5 x 0,75 mm <sup>2</sup>	940500
L1500 mm - 7 x 0,75 mm <sup>2</sup>	940600
L3000 mm - 3 x 0,75 mm <sup>2</sup>	940401
L3000 mm - 5 x 0,75 mm <sup>2</sup>	940501
L3000 mm - 7 x 0,75 mm <sup>2</sup>	940601
L6000 mm - 3 x 0,75 mm <sup>2</sup>	940402
L6000 mm - 5 x 0,75 mm <sup>2</sup>	940507
L6000 mm - 7 x 0,75 mm <sup>2</sup>	940602

• For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm<sup>2</sup>.

#### Round ceiling rose

Surface mounted T24	45 l		Ø95	978600♣
Surface mounted T26 (DALI+K3)				978601♣


Recessed T5	Ø70	33 l		Ø90	971300♣
Recessed T27 (DALI+K3)					978700♣

#### Central ceiling rose

Surface mounted T21	45 l		Ø95	977211♣
Surface mounted T28 (DALI+K3)				977230♣

#### Suspension rod

D95 - Ø400, Ø600 mm	913000♣
D120 - Ø900, Ø1150 mm	913010♣

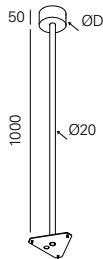

#### Low Output version

- Under request.



\*Replace the symbols to complete the code

<b>Colour</b>	♣
<input type="checkbox"/> White	W
<input checked="" type="checkbox"/> Black	B




## Product details



Ceiling surface application



Suspended application



Wall mounted



gCONTROL+ diffuser



LIGHT+ diffuser



Indirect light



Outer parallel suspension



Inner parallel suspension



Outer central suspension




Inner central suspension



Suspension rod



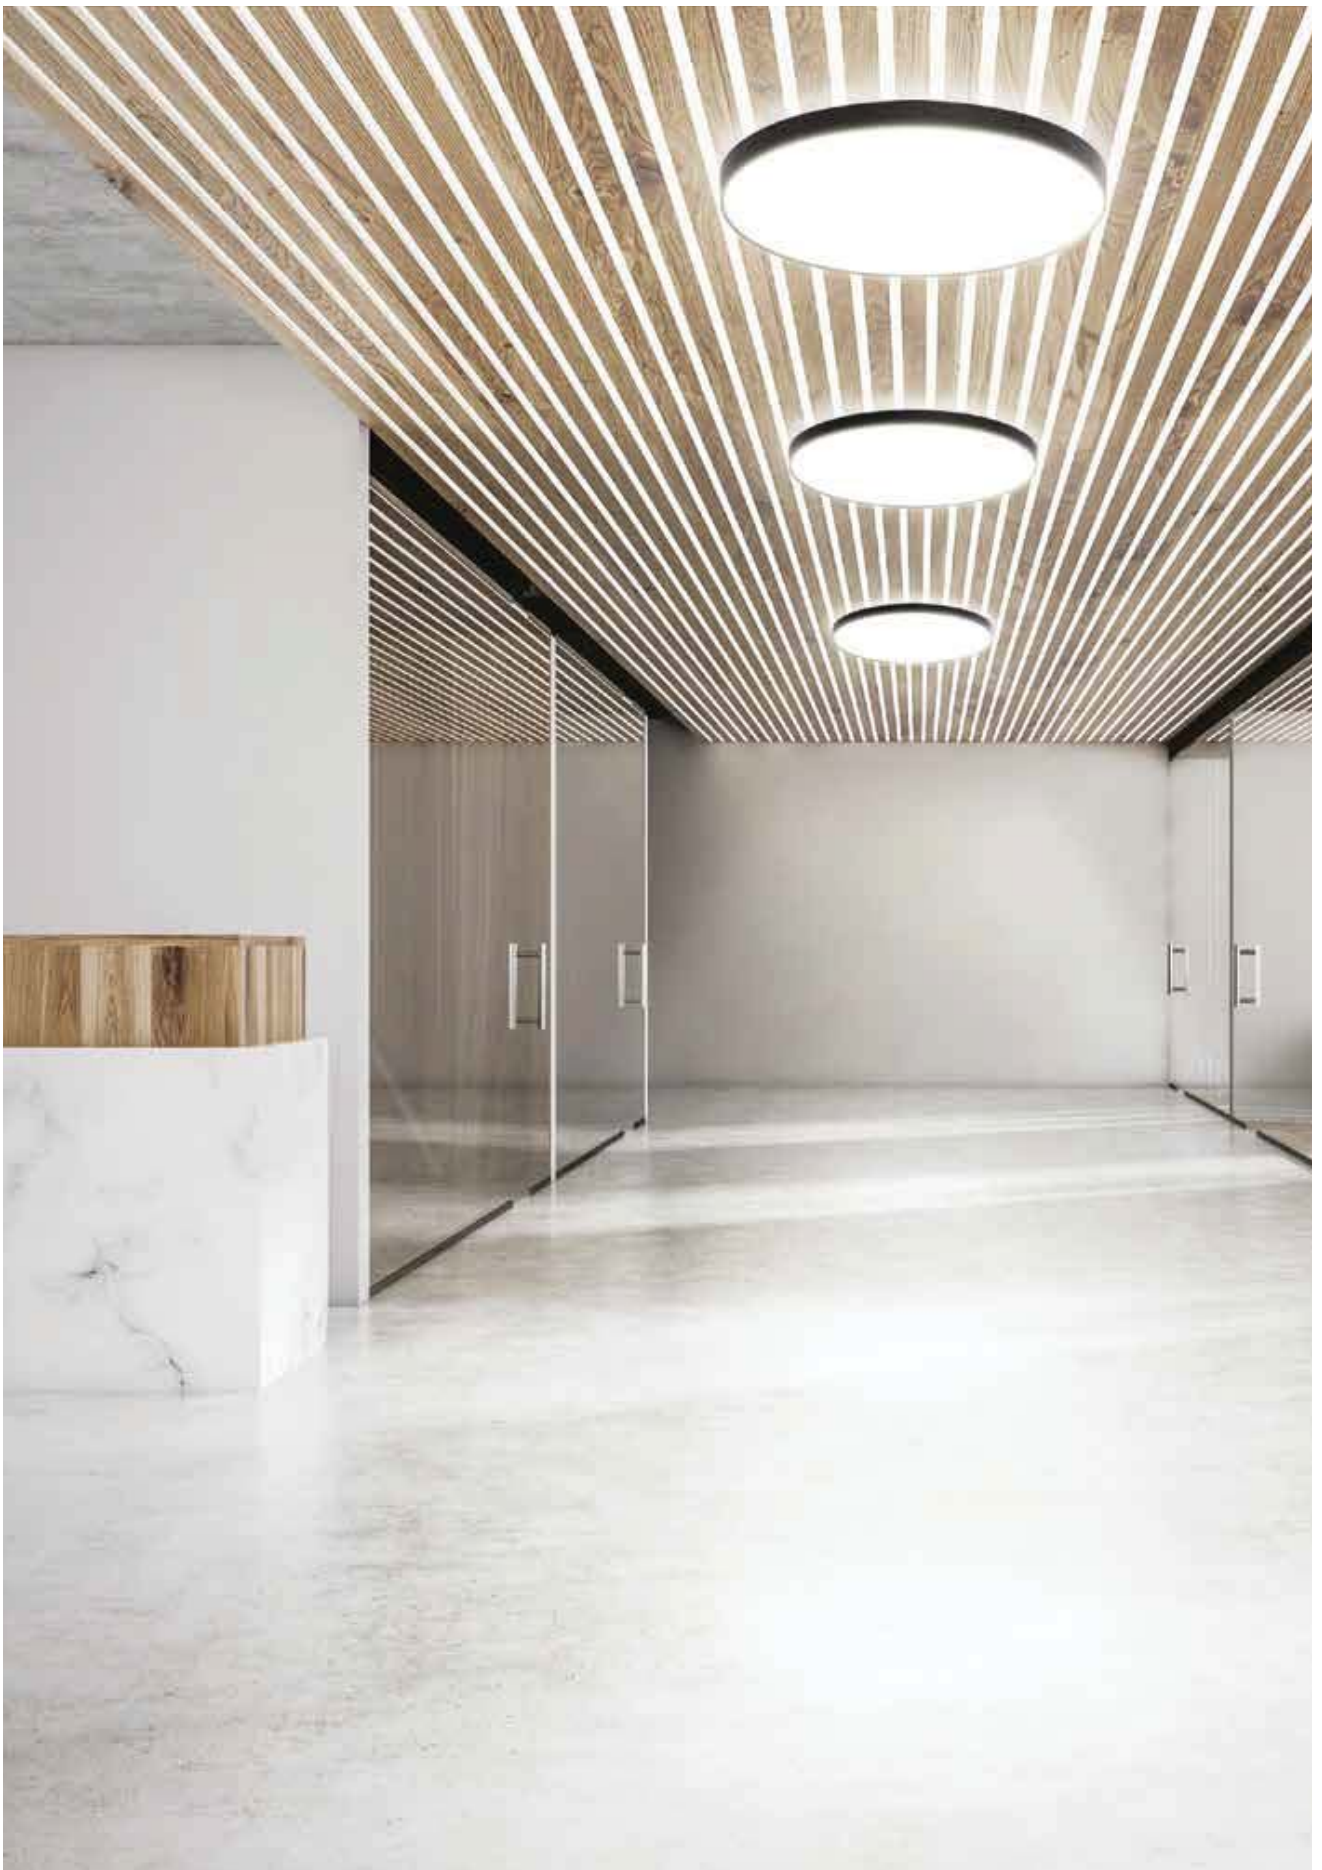



ARCHITECTURAL  
LIGHTING

## ROFY 85 /E



### Product characteristics

**Body**

Aluminium

**Finish**

Powder coated

**Optical system**

gCONTROL+ - Microprismatic diffuser  
LIGHT+ - Opal diffuser

**Light source**

LED, RG1, CRI>80, MacAdam Step ≤3

**LED lifetime**


80.000h @ L90, B10, Ta 25°C

**Control gear**

LED driver 220-240V-50/60Hz included

**Ceiling thickness**

For ceilings between 1-25 mm






## 01. Select version

### ROFY 85 / E




#### gCONTROL+ - Microprismatic diffuser



UGR	W	lm output	lm/W	Dmm	Ø	Ø	CODE*
≤19	16	1810	113	Ø300	Ø277	90622L300	♥♣0♦00
≤19	24	2871	120	Ø400	Ø377	90622L400	♥♣0♦00
≤19	43	5526	129	Ø600	Ø577	90622L600	♥♣0♦00
≤19	65	8230	127	Ø900	Ø877	90622L900	♥♣0♦00
≤19	107	13429	126	Ø1150	Ø1127	90622L1150	♥♣0♦00

#### LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	Dmm	Ø	Ø	CODE*
≤25	16	2135	133	Ø300	Ø277	90621L300	♥♣0♦00
≤25	24	3385	141	Ø400	Ø377	90621L400	♥♣0♦00
≤22	43	6516	152	Ø600	Ø577	90621L600	♥♣0♦00
≤22	65	9704	149	Ø900	Ø877	90621L900	♥♣0♦00
≤22	107	15835	148	Ø1150	Ø1127	90621L1150	♥♣0♦00

### ROFY 85 / E

• This product cannot be installed on the wall.



\*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H

Colour <sup>1</sup>	
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D

Emergency	
No EM	0
EM 3h (K3) <sup>2</sup>	3

Colour temp.	
3000K	3
4000K	0
Tunable White <sup>3</sup>	T

## 02. Select options

OPTIONS Code


Steel safety cable 955000

Low Output version

• Under request.



### Product details



Ceiling recessed application



gCONTROL+ diffuser



LIGHT+ diffuser





ARCHITECTURAL  
LIGHTING

## ROFY 85



### Product characteristics

**Body**

Aluminium

**Finish**

Powder coated

**Optical system**

gCONTROL+ - Microprismatic diffuser  
LIGHT+ - Opal diffuser

**Light source**

LED, RG1, CRI>80, MacAdam Step ≤3

**LED lifetime**

80.000h @ L90, B10, Ta 25°C

**Control gear**

LED driver 220-240V-50/60Hz included



230V/50Hz



IP 40

IK 04

650°C







## 01. Select version



### ROFY 85




#### gCONTROL+ - Microprismatic diffuser



UGR	W	lm output	lm/W	Dmm	CODE*
≤22	16	1999	125	Ø300	90620L300▼▲0◆00
≤22	24	3171	132	Ø400	90620L400▼▲0◆00
≤19	43	6104	142	Ø600	90620L600▼▲◆◆00
≤19	65	9090	140	Ø900	90620L900▼▲◆◆00
≤19	107	14833	139	Ø1150	90620L115▼▲◆◆00

#### LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	Dmm	CODE*
≤25	16	2162	135	Ø300	90619L300▼▲0◆00
≤25	24	3428	143	Ø400	90619L400▼▲0◆00
≤22	43	6598	153	Ø600	90619L600▼▲◆◆00
≤22	65	9827	151	Ø900	90619L900▼▲◆◆00
≤22	107	16035	150	Ø1150	90619L115▼▲◆◆00

### ROFY 85

- For suspended version add current supply cable, suspension and ceiling rose. Please order separately.

\*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H

Colour <sup>1</sup>	
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D

Emergency	
No EM	0
EM 3h (K3) <sup>2</sup>	3

Colour temp.	
3000K	3
4000K	0
Tunable White <sup>3</sup>	T





ARCHITECTURAL LIGHTING

ROFY 85

## 02. Select options

OPTIONS Code\*

### Suspension

S10 L1500 mm (x3)	9111001
S10 L3000 mm (x3)	9111002
S10 L6000 mm (x3)	9111003

### Transparent current supply cable

L1500 mm - 3 x 0,75 mm <sup>2</sup>	940400
L1500 mm - 5 x 0,75 mm <sup>2</sup>	940500
L1500 mm - 7 x 0,75 mm <sup>2</sup>	940600
L3000 mm - 3 x 0,75 mm <sup>2</sup>	940401
L3000 mm - 5 x 0,75 mm <sup>2</sup>	940501
L3000 mm - 7 x 0,75 mm <sup>2</sup>	940601
L6000 mm - 3 x 0,75 mm <sup>2</sup>	940402
L6000 mm - 5 x 0,75 mm <sup>2</sup>	940507
L6000 mm - 7 x 0,75 mm <sup>2</sup>	940602

• For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm<sup>2</sup>.

### Round ceiling rose

Surface mounted T24	45 l		Ø95	978600♣
Surface mounted T26 (DALI+K3)				978601♣


Recessed T5	Ø70	33 l		Ø90	971300♣
Recessed T27 (DALI+K3)					978700♣

### Central ceiling rose

Surface mounted T21	45 l		Ø95	977211♣
Surface mounted T28 (DALI+K3)				977230♣

### Suspension rod

D95 - Ø400, Ø600 mm	913000♣
D120 - Ø900, Ø1150 mm	913010♣



### Low Output version

• Under request.



\*Replace the symbols to complete the code

Colour	▲
<input type="checkbox"/> White	W
<input checked="" type="checkbox"/> Black	B



## Product details



Ceiling surface application



Suspended application



Wall mounted




gCONTROL+ diffuser



LIGHT+ diffuser



Outer parallel suspension




Inner parallel suspension



Outer central suspension



Inner central suspension



Suspension rod









ARCHITECTURAL  
LIGHTING

## ROFY 85 D/I



### Product characteristics

**Body**

Aluminium

**Finish**

Powder coated

**Optical system**

gCONTROL+ - Microprismatic diffuser  
LIGHT+ - Opal diffuser

**Light source**


LED, RG1, CRI>80, MacAdam Step ≤3

**LED lifetime**

80.000h @ L90, B10, Ta 25°C

**Control gear**


LED driver 220-240V-50/60Hz included






## 01. Select version

### ROFY 85 D/I




#### gCONTROL+ - Microprismatic diffuser (80%/20%)



UGR	W	lm output	lm/W	Dmm	CODE*
≤19	32	4018	126	Ø400	90624L400▼▲◆◆00
≤19	56	7494	134	Ø600	90624L600▼▲◆◆00
≤19	84	11203	133	Ø900	90624L900▼▲◆◆00
≤19	137	18377	134	Ø1150	90624L115▼▲◆◆00

#### LIGHT+ - Opal diffuser (80%/20%)



UGR	W	lm output	lm/W	Dmm	CODE*
≤22	32	4242	133	Ø400	90623L400▼▲◆◆00
≤22	56	7910	141	Ø600	90623L600▼▲◆◆00
≤22	84	11826	141	Ø900	90623L900▼▲◆◆00
≤22	137	19398	142	Ø1150	90623L115▼▲◆◆00

### ROFY 85 D/I

- To complete the product add current supply cable, suspension and ceiling rose. Please order separately.
- In order to guarantee a total uniformity of light on the ceiling, the installation must be done at a minimum distance of 500 mm.



\*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H

Colour 1	
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D

Emergency	
No EM	0
EM 3h (K3) ²	3

Colour temp.	
3000K	3
4000K	0
Tunable White	T





## 02. Select options

### OPTIONS Code\*

#### Suspension

S10 L1500 mm (x3)	9111001
S10 L3000 mm (x3)	9111002
S10 L6000 mm (x3)	9111003

#### Transparent current supply cable

L1500 mm - 3 x 0,75 mm <sup>2</sup>	940400
L1500 mm - 5 x 0,75 mm <sup>2</sup>	940500
L1500 mm - 7 x 0,75 mm <sup>2</sup>	940600
L3000 mm - 3 x 0,75 mm <sup>2</sup>	940401
L3000 mm - 5 x 0,75 mm <sup>2</sup>	940501
L3000 mm - 7 x 0,75 mm <sup>2</sup>	940601
L6000 mm - 3 x 0,75 mm <sup>2</sup>	940402
L6000 mm - 5 x 0,75 mm <sup>2</sup>	940507
L6000 mm - 7 x 0,75 mm <sup>2</sup>	940602

- For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm<sup>2</sup>.

#### Round ceiling rose

Surface mounted T24	45 l	Ø95	978600♣
Surface mounted T26 (DALI+K3)			978601♣


Recessed T5	Ø70	33 l	Ø90	971300♣
Recessed T27 (DALI+K3)				978700♣

#### Central ceiling rose

Surface mounted T21	45 l	Ø95	977211♣
Surface mounted T28 (DALI+K3)			977230♣

#### Suspension rod

D95 - Ø400, Ø600 mm	913000♣
D120 - Ø900, Ø1150 mm	913010♣

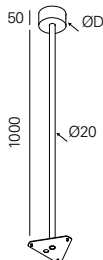

#### Low Output version

- Under request.



\*Replace the symbols to complete the code

#### Colour

<input type="checkbox"/> White	W
<input type="checkbox"/> Black	B



## Product details



Suspended application



Indirect light



gCONTROL+ diffuser



LIGHT+ diffuser



Outer parallel suspension



Inner parallel suspension



Outer central suspension



Inner central suspension



Suspension rod







ARCHITECTURAL  
LIGHTING

## ROFY 85 IP /E



### Product characteristics

**Body**

Aluminium

**Finish**

Powder coated

**Optical system**

LIGHT+ - Opal diffuser

**Light source**

LED, RG1, CRI>80, MacAdam Step  $\leq 3$

**LED lifetime**

80.000h @ L90, B10, Ta 25°C

**Control gear**

LED driver 220-240V-50/60Hz included

**Ceiling thickness**

For ceilings between 1-35 mm






## 01. Select version

ROFY 85 IP / E



### LIGHT+ - Opal diffuser



W	lm output	lm/W	Dmm	Ø	Ø	CODE*
16	2135	133	Ø302	Ø286	Ø286	90573L300♥♣0♦00
24	3385	141	Ø402	Ø386	Ø386	90573L400♥♣0♦00
43	6516	152	Ø603	Ø586	Ø586	90573L600♥♣0♦00

ROFY 85 IP / E

• This product cannot be installed on the wall.



\*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour <sup>1</sup>	▲
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D

Emergency	●
No EM	0
EM 3h (K3) <sup>2</sup>	3

Colour temp.	♦
3000K	3
4000K	0
Tunable White <sup>3</sup>	T

## 02. Select options

OPTIONS Code


Steel safety cable L1500 mm 955000

Low Output version

• Under request.



### Product details



Ceiling recessed application



LIGHT+ diffuser





ARCHITECTURAL  
LIGHTING

## ROFY 85 IP /C



### Product characteristics

**Body**

Aluminium

**Finish**

Powder coated

**Optical system**

LIGHT+ - Opal diffuser

**Light source**


LED, RG1, CRI>80, MacAdam Step ≤3

**LED lifetime**

80.000h @ L90, B10, Ta 25°C

**Control gear**


LED driver 220-240V-50/60Hz included






## 01. Select version

ROFY 85 IP /C



### LIGHT+ - Opal diffuser



W	lm output	lm/W	Dmm	CODE*
16	2135	133	Ø300	90581L300♥♣0+00
24	3385	141	Ø400	90581L400♥♣0+00
43	6516	152	Ø600	90581L600♥♣0+00



\*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H

Colour <sup>1</sup>	
<input type="checkbox"/> White	W
<input type="checkbox"/> Grey	G
<input type="checkbox"/> Black	B
<input type="checkbox"/> Sahara	0
<input type="checkbox"/> Mist	1
<input type="checkbox"/> Carbon	I
<input type="checkbox"/> Autumn	L
<input type="checkbox"/> Rusty chain	R
<input type="checkbox"/> Jungle	N
<input type="checkbox"/> Golden eye	D

Emergency	
No EM	0
EM 3h (K3) <sup>2</sup>	3

Colour temp.	
3000K	3
4000K	0
Tunable White <sup>3</sup>	T

## 02. Select options

### OPTIONS

#### Low Output version

- Under request.



### Product details



Ceiling surface application



Wall mounted



LIGHT+ diffuser




IP54 protection







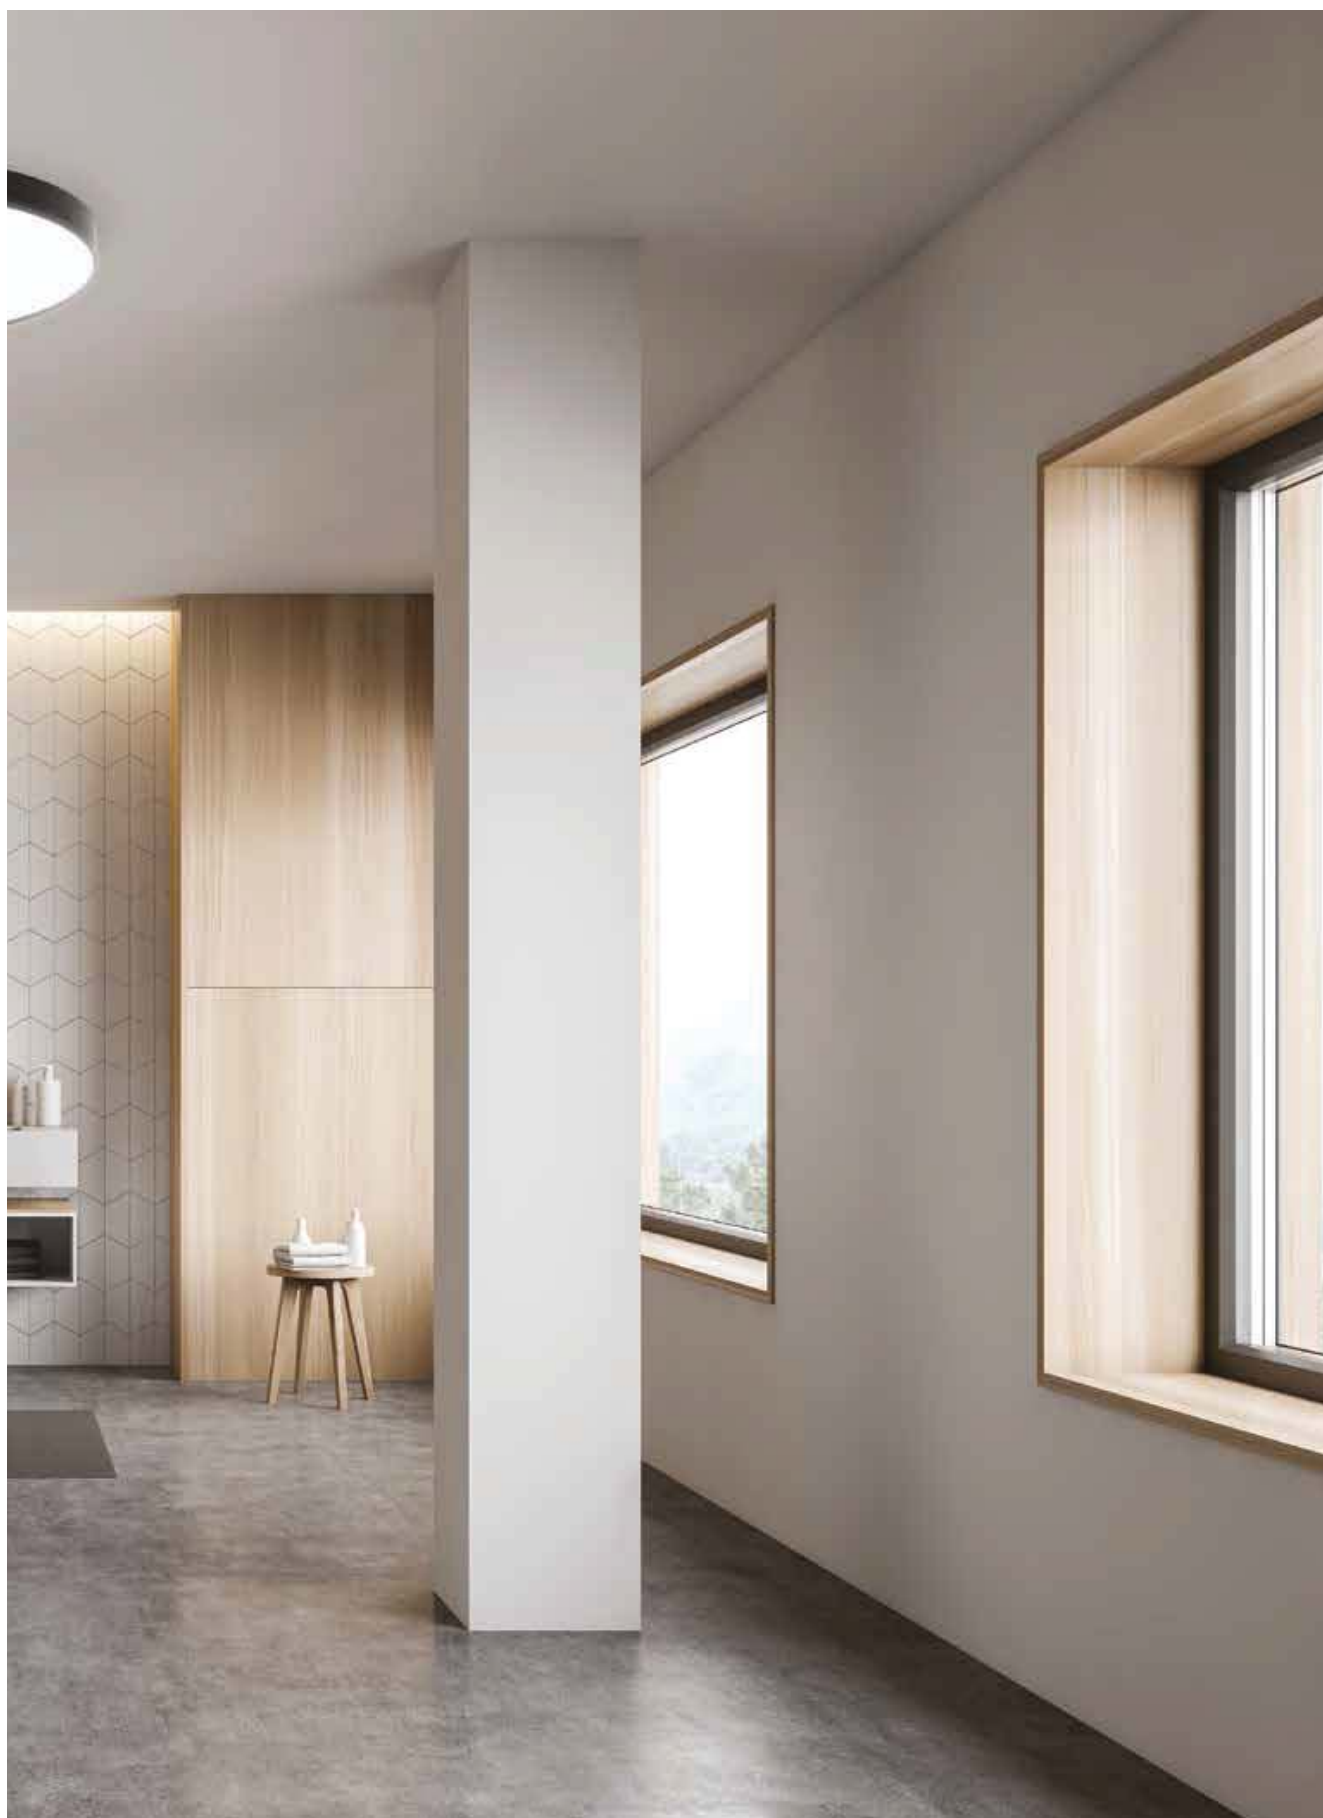





Architectural  
lighting

# ROFY 60 SQ



ROFY 60 Sq  
198




ROFY 60 Sq D/I  
202





ARCHITECTURAL  
LIGHTING

## ROFY 60 Sq

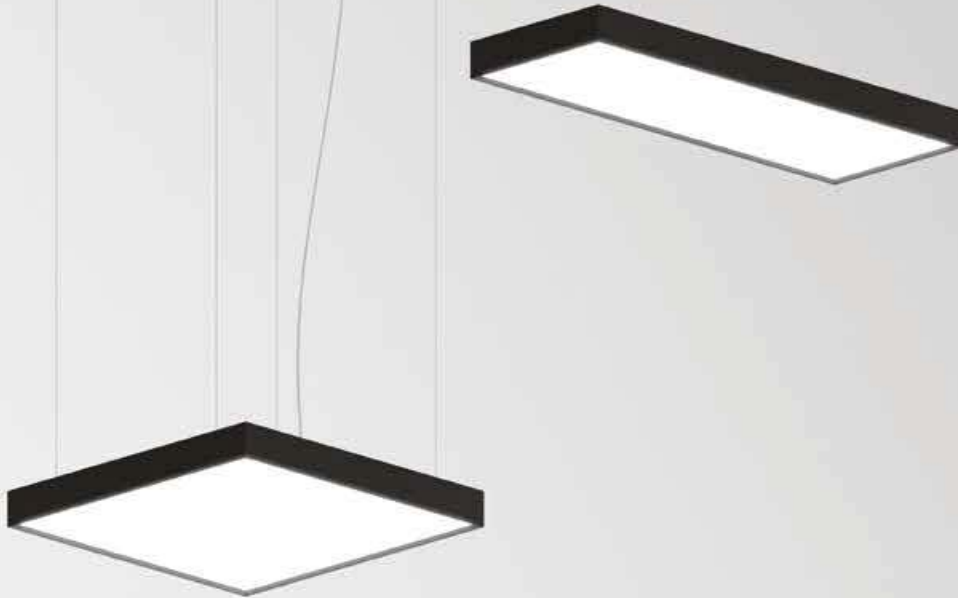

### Product characteristics

**Body**

Aluminium

**Finish**

Powder coated

**Optical system**

gCONTROL+ - Microprismatic diffuser  
LIGHT+ - Opal diffuser

**Light source**


LED, RG1, CRI>80, MacAdam Step ≤3

**LED lifetime**

80.000h @ L90, B10, Ta 25°C

**Control gear**


LED driver 220-240V-50/60Hz included






## 01. Select version

### ROFY 60 Sq




#### gCONTROL+ - Microprismatic diffuser



UGR	W	lm output	lm/W	LxWmm	CODE*
≤19	12	1478	123	286x286	90718L286▼▲0♦00
≤19	45	5913	131	550x550	90718L550▼▲♦♦00
≤19	25	2956	118	550x286	90718L552▼▲0♦00
≤19	36	4435	123	814x286	90718L812▼▲♦♦00
≤19	45	5913	131	1078x286	90718L102▼▲♦♦00
≤19	56	7391	132	1342x286	90718L132▼▲♦♦00

#### LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	LxWmm	CODE*
≤22	12	1582	132	286x286	90720L286▼▲0♦00
≤22	45	6329	141	550x550	90720L550▼▲♦♦00
≤22	25	3165	127	550x286	90720L552▼▲0♦00
≤22	36	4747	132	814x286	90720L812▼▲♦♦00
≤22	45	6329	141	1078x286	90720L102▼▲♦♦00
≤22	56	7912	141	1342x286	90720L132▼▲♦♦00

### ROFY 60 Sq

\* For suspended version add current supply cable, suspension and ceiling rose. Please order separately.



\*Replace the symbols to complete the code

Control	▼
gear	
HF	E
DALI	H

Colour 1	▲
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D

Emergency	●
No EM	0
EM 3h (K3) 2	3

Colour temp.	♦
3000K	3
4000K	0
Tunable White	T





ARCHITECTURAL  
LIGHTING

ROFY 60 Sq

## 02. Select options

### OPTIONS Code\*

#### Suspension


S11 L1500 mm (x4)	9129041
S11 L3000 mm (x4)	9129042
S11 L6000 mm (x4)	9129043



#### Transparent current supply cable

L1500 mm - 3 x 0,75 mm <sup>2</sup>	940400
L1500 mm - 5 x 0,75 mm <sup>2</sup>	940500
L1500 mm - 7 x 0,75 mm <sup>2</sup>	940600
L3000 mm - 3 x 0,75 mm <sup>2</sup>	940401
L3000 mm - 5 x 0,75 mm <sup>2</sup>	940501
L3000 mm - 7 x 0,75 mm <sup>2</sup>	940601
L6000 mm - 3 x 0,75 mm <sup>2</sup>	940402
L6000 mm - 5 x 0,75 mm <sup>2</sup>	940507
L6000 mm - 7 x 0,75 mm <sup>2</sup>	940602

- For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm<sup>2</sup>.

#### Ceiling rose

Surface mounted T25	45      100	978610♣
Surface mounted T29 (DALI+K3)		978611♣

Recessed T7	 Ø70   35      90	971400♣
Recessed T59 (DALI+K3)		971410♣

#### Low Output version

- Under request.




\*Replace the symbols to complete the code

#### Colour


<input type="checkbox"/> White	W
<input type="checkbox"/> Black	B




### Product details




Ceiling surface application



Suspended application



Wall mounted



gCONTROL+ diffuser



LIGHT+ diffuser



Outer parallel suspension



Ceiling roses









ARCHITECTURAL  
LIGHTING

## ROFY 60 Sq D/I



### Product characteristics

**Body**

Aluminium

**Finish**

Powder coated

**Optical system**

gCONTROL+ - Microprismatic diffuser  
LIGHT+ - Opal diffuser

**Light source**


LED, RG1, CRI>80, MacAdam Step ≤3

**LED lifetime**

80.000h @ L90, B10, Ta 25°C

**Control gear**


LED driver 220-240V-50/60Hz included






## 01. Select version

### ROFY 60 Sq D/I




#### gCONTROL+ - Microprismatic diffuser (75%/25%)



UGR	W	lm output	lm/W	LxWmm	CODE*
≤16	18	2231	124	286x286	90714L286▼▲◆◆00
≤19	60	7753	129	550x550	90714L550▼▲◆◆00
≤19	33	3967	120	550x286	90714L552▼▲◆◆00
≤19	48	6269	131	814x286	90714L812▼▲◆◆00
≤19	60	7935	132	1078x286	90714L102▼▲◆◆00
≤19	75	9912	132	1342x286	90714L132▼▲◆◆00

#### LIGHT+ - Opal diffuser (75%/25%)



UGR	W	lm output	lm/W	LxWmm	CODE*
≤22	18	2325	129	286x286	90716L286▼▲◆◆00
≤22	60	8081	135	550x550	90716L550▼▲◆◆00
≤22	33	4135	125	550x286	90716L552▼▲◆◆00
≤22	48	6534	136	814x286	90716L812▼▲◆◆00
≤22	60	8270	138	1078x286	90716L102▼▲◆◆00
≤22	75	10330	138	1342x286	90716L132▼▲◆◆00

### ROFY 60 Sq D/I

- To complete the product add current supply cable, suspension and ceiling rose. Please order separately.
- In order to guarantee total light uniformity on the ceiling in the suspended version, installation must be carried out at a minimum distance of 500 mm.



\*Replace the symbols to complete the code

Control gear	Symbol
HF	E
DALI	H

Colour 1	Symbol
White	W
Grey	G
Black	B
Sahara	0
Mist	1
Carbon	I
Autumn	L
Rusty chain	R
Jungle	N
Golden eye	D

Emergency	Symbol
No EM	0
EM 3h (K3) <sup>2</sup>	3

Colour temp.	Symbol
3000K	3
4000K	0
Tunable White	T





## 02. Select options

### OPTIONS Code\*

#### Suspension


S11 L1500 mm (x4)	9129041
S11 L3000 mm (x4)	9129042
S11 L6000 mm (x4)	9129043



#### Transparent current supply cable

L1500 mm - 3 x 0,75 mm <sup>2</sup>	940400
L1500 mm - 5 x 0,75 mm <sup>2</sup>	940500
L1500 mm - 7 x 0,75 mm <sup>2</sup>	940600
L3000 mm - 3 x 0,75 mm <sup>2</sup>	940401
L3000 mm - 5 x 0,75 mm <sup>2</sup>	940501
L3000 mm - 7 x 0,75 mm <sup>2</sup>	940601
L6000 mm - 3 x 0,75 mm <sup>2</sup>	940402
L6000 mm - 5 x 0,75 mm <sup>2</sup>	940507
L6000 mm - 7 x 0,75 mm <sup>2</sup>	940602

• For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm<sup>2</sup>.

#### Ceiling rose

Surface mounted T25	45      $\varnothing$ 100	978610♣
Surface mounted T29 (DALI+K3)		978611♣

Recessed T7	   $\varnothing$ 70   35      $\varnothing$ 90	971400♣
Recessed T59 (DALI+K3)		971410♣

#### Low Output version

• Under request.




**\*Replace the symbols to complete the code**


Colour		♣
<input type="checkbox"/> White		W
<input checked="" type="checkbox"/> Black		B



## Product details



Ceiling surface application



Suspended application



Wall mounted



Indirect light



gCONTROL+ diffuser



LIGHT+ diffuser



Outer parallel suspension



Ceiling roses



