



Architectural
lighting

ROFY 60 SQ



ROFY 60 Sq
198




ROFY 60 Sq D/I
202





ARCHITECTURAL
LIGHTING

ROFY 60 Sq

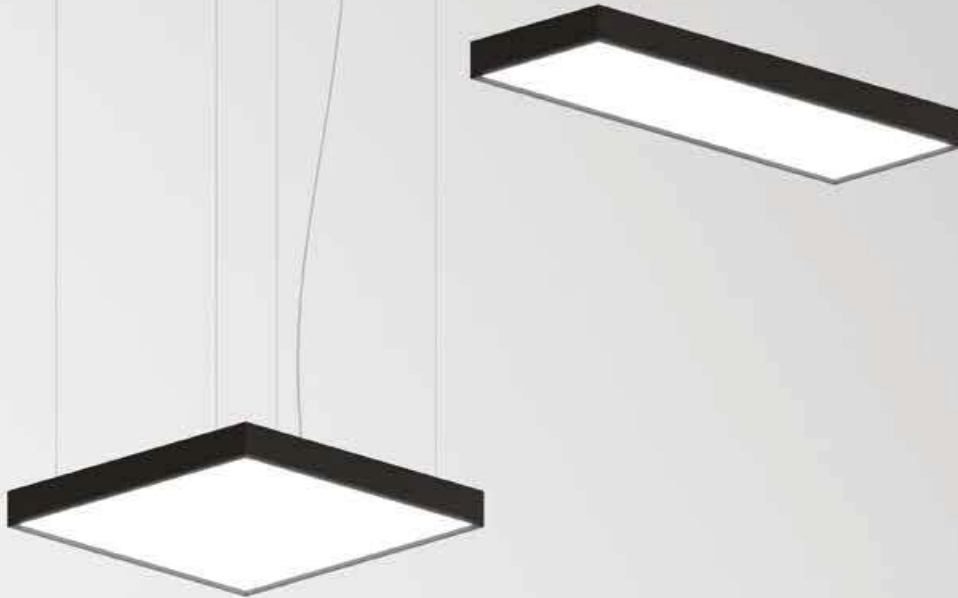

Product characteristics

Body

Aluminium

Finish

Powder coated

Optical system

gCONTROL+ - Microprismatic diffuser
LIGHT+ - Opal diffuser

Light source


LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

80.000h @ L90, B10, Ta 25°C

Control gear


LED driver 220-240V-50/60Hz included






01. Select version

ROFY 60 Sq




gCONTROL+ - Microprismatic diffuser



UGR	W	lm output	lm/W	LxWmm	CODE*
≤19	12	1478	123	286x286	90718L286▼▲0♦00
≤19	45	5913	131	550x550	90718L550▼▲♦♦00
≤19	25	2956	118	550x286	90718L552▼▲0♦00
≤19	36	4435	123	814x286	90718L812▼▲♦♦00
≤19	45	5913	131	1078x286	90718L102▼▲♦♦00
≤19	56	7391	132	1342x286	90718L132▼▲♦♦00

LIGHT+ - Opal diffuser



UGR	W	lm output	lm/W	LxWmm	CODE*
≤22	12	1582	132	286x286	90720L286▼▲0♦00
≤22	45	6329	141	550x550	90720L550▼▲♦♦00
≤22	25	3165	127	550x286	90720L552▼▲0♦00
≤22	36	4747	132	814x286	90720L812▼▲♦♦00
≤22	45	6329	141	1078x286	90720L102▼▲♦♦00
≤22	56	7912	141	1342x286	90720L132▼▲♦♦00

ROFY 60 Sq

* For suspended version add current supply cable, suspension and ceiling rose. Please order separately.



*Replace the symbols to complete the code

Control ▼
gear
 HF E
 DALI H

Colour 1 ▲
 White W
 Grey G
 Black B
 Sahara 0
 Mist 1
 Carbon I
 Autumn L
 Rusty chain R
 Jungle N
 Golden eye D

Emergency ●
 No EM 0
 EM 3h (K3) 2 3

Colour temp. ◆
 3000K 3
 4000K 0
 Tunable White T





ARCHITECTURAL
LIGHTING

ROFY 60 Sq

02. Select options

OPTIONS Code*

Suspension


S11 L1500 mm (x4)	9129041
S11 L3000 mm (x4)	9129042
S11 L6000 mm (x4)	9129043



Transparent current supply cable

L1500 mm - 3 x 0,75 mm ²	940400
L1500 mm - 5 x 0,75 mm ²	940500
L1500 mm - 7 x 0,75 mm ²	940600
L3000 mm - 3 x 0,75 mm ²	940401
L3000 mm - 5 x 0,75 mm ²	940501
L3000 mm - 7 x 0,75 mm ²	940601
L6000 mm - 3 x 0,75 mm ²	940402
L6000 mm - 5 x 0,75 mm ²	940507
L6000 mm - 7 x 0,75 mm ²	940602

- For the DALI option with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm².

Ceiling rose

Surface mounted T25	45  100	978610♣
Surface mounted T29 (DALI+K3)		978611♣

Recessed T7	 Ø70 35  90	971400♣
Recessed T59 (DALI+K3)		971410♣

Low Output version

- Under request.




*Replace the symbols to complete the code

Colour


<input type="checkbox"/> White	W
<input type="checkbox"/> Black	B




Product details



Ceiling surface application



Suspended application



Wall mounted



gCONTROL+ diffuser



LIGHT+ diffuser



Outer parallel suspension



Ceiling roses

