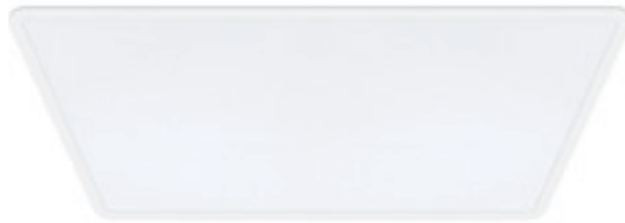


SPA /E LED

ARCHITECTURAL LIGHTING

Norms

EN 60598-1, EN 60598-2-2


Body: Steel sheet.

Finish: Powder coated.



Diffuser: Polycarbonate.

Light source: LED 4000K, CRI>80.



LED life time: 65.000h @ L80, B10, Ta 25°C.

Control gear: LED driver 220-240VAC-50/60Hz.

gCONTROL⁺ - Microprismatic polycarbonate diffuser PLUS

LED	UGR	W	Lm	Lm/W	η(%)	AxBxC (mm)		Kg	K1 K3	HF	DALI
	≤19	30	4080	84	62	875x315x99	860x300	6,3	• •	90077.L130.E	90077.L130.H
	≤19	39	5440	89	64	1150x315x99	1125x300	8,0	• •	90077.L140.E	90077.L140.H
	≤19	47	6800	94	65	1425x315x99	1410x300	9,8	• •	90077.L150.E	90077.L150.H
	≤19	39	5440	86	62	590x590x99	575x575	7,4	• •	90077.L410.E	90077.L410.H

DOZ - Opal polycarbonate diffuser

LED	UGR	W	Lm	Lm/W	η(%)	AxBxC (mm)		Kg	K1 K3	HF	DALI
	≤22	30	4080	92	68	875x315x99	860x300	6,3	• •	90032.L130.E	90032.L130.H
	≤22	39	5440	99	71	1150x315x99	1125x300	8,0	• •	90032.L140.E	90032.L140.H
	≤22	47	6800	104	72	1425x315x99	1410x300	9,8	• •	90032.L150.E	90032.L150.H
	≤22	39	5440	98	70	590x590x99	575x575	7,4	• •	90032.L410.E	90032.L410.H

OPTIONS

Finish

Order code	Order code
White W	Golden eye D
Gray G	Sahara 0
Black B	Autumn L
Blue U	Rusty chain R
Green V	Pure chocolate C
Yellow T	Mist 1
Red K	Dark rock 9
Jungle N	Carbon I


Colour temperature

Order code	Order code
3000K	3000


Safety cable

Order code	Order code
Steel safety cable	955000




Emergency unit

Order code	Order code
Emergency unit 3 hours	K3
Emergency unit 1 hour	K1





- Test function by telecommand signal.


Low power version

Option supplied under request.

PHOTOMETRY

TO SPECIFY

Recessed square or rectangular LED luminaire. Available in 4 sizes (875/1150/1425 x 315mm and 590x590mm) equipped with polycarbonate microprismatic gCONTROL⁺ or DOZ opal polycarbonate diffuser. Standard

DIMENSIONS


version with LED 4000K, CRI>80 and 65.000h lifetime (@L80, B10, Ta 25°C). Optional 3000K, DALI dimmable driver and 1 or 3 hours emergency unit. Available in 16 different colours – as Roxo Lighting SPA /E LED