

Aluminium Profile Systems













INDELAGE GROUP

INDELAGE™ ROXO lighting

Loft & Lys Aps
Værkstedsgården 9
2620 Albertslund
6080 2973
www.loftlys.dk
info@loftlys.dk







														
								 				 		
				30%  70% 								20%  80% 		
842x77x80 mm 1122x77x80 mm 1402x77x80 mm 1682x77x80 mm 1964x77x80 mm 2244x77x80 mm 2524x77x80 mm 2804x77x80 mm				842x65x80 mm 1122x65x80 mm 1402x65x80 mm 1682x65x80 mm 1964x65x80 mm 2244x65x80 mm 2524x65x80 mm 2804x65x80 mm				842x90x98 mm 1122x90x98 mm 1402x90x98 mm 1682x90x98 mm 1964x90x98 mm 2244x90x98 mm 2524x90x98 mm 2804x90x98 mm				842x90x98 mm 1122x90x98 mm 1402x90x98 mm 1682x90x98 mm 1964x90x98 mm 2244x90x98 mm 2524x90x98 mm 2804x90x98 mm		1122x90x98 mm 1402x90x98 mm 1682x90x98 mm 2244x90x98 mm 2524x90x98 mm 2804x90x98 mm
bGLARE  bLINE 				bLINE 				DAM  bLINE 				bLINE 		DAM  bLINE 

				--			
	Horizontal Vertical	-- 	Horizontal Vertical	-- 		Horizontal Vertical	--
-- 	Horizontal Vertical	-- 	-- 	-- 	Horizontal Vertical	-- 	--
-- 	1,5 m 3 m	-- 	1,5 m 3 m	-- 	1,5 m 3 m	-- 	--
-- 	✓	-- 	✓	-- 	✓	-- 	--


MODULAR SYSTEMS




**REBA 35
(trim)**
47,5x85 mm



**REBA 35
(direct/
indirect)**
35x100 mm



**REBA
(trim)**
62x85 mm



**REBA
(trimless)**
50x70 mm



**REBA
(direct/
indirect)**
50x140 mm




CREATE SPACES
THROUGH LIGHT





STRUCTURAL ELEMENTS COMPOSITION

STRAIGHT LINE



RECESSED





SURFACE MOUNTED / SUSPENDED



HORIZONTAL ANGLE



VERTICAL ANGLE

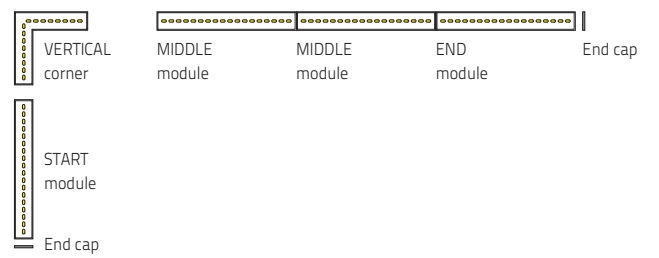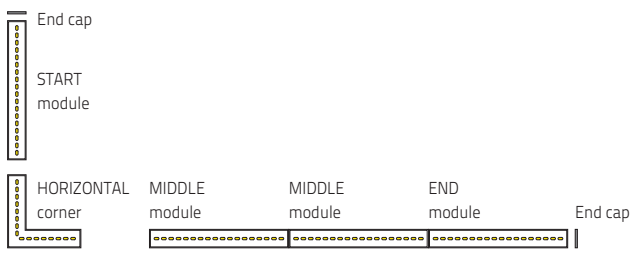

RECESSED



RECESSED



SURFACE MOUNTED / SUSPENDED





SURFACE MOUNTED / SUSPENDED




OPTICAL SYSTEM

bGLARE™

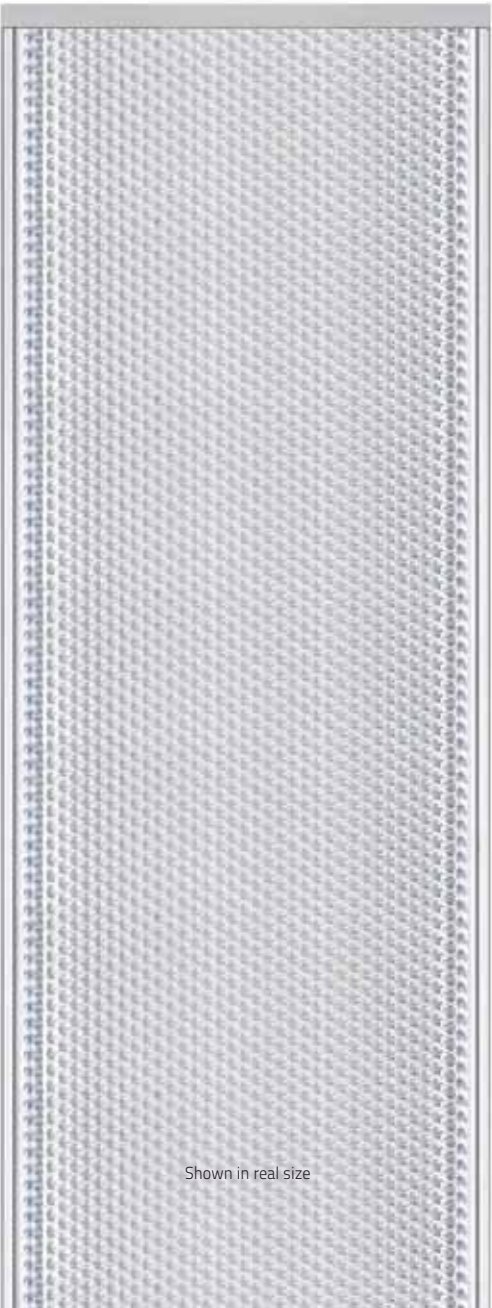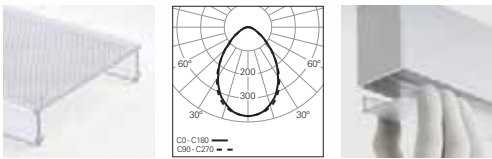

Shown in real size

bLINE™

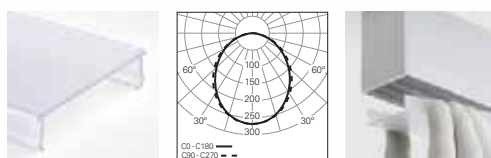

Shown in real size


FINISHES



WHITE



ANODISED ALUMINIUM



BLACK





TUNABLE WHITE



The well-being is extremely important for all of us and for our relationships with others and it has influence on our behavior during the day. With TunableWhite technology it is possible to adjust the colour temperature of the artificial light in order to maximize the comfort of the

users inside indoor spaces. Natural light helps us to set our circadian rhythm which affects our wellbeing during the day. Our luminaires with TunableWhite technology are the perfect solution to light a wide range of environments such as offices, open spaces, lobbies and waiting rooms,

conference rooms and healthcare spaces. This technology creates a dynamic white light, changing light colour temperature from 2700K up to 5700K while maintaining the light intensity constant.



REBA 35 RANGE

REBA 35 /E LED
REBA 35 /E LED Line
Recessed with trim



REBA 35 LED
REBA 35 LED Line
Surface mounted / Suspended
Direct



REBA 35 RANGE



REBA 35 /E LED
REBA 35 /E LED Line



REBA 35 LED
REBA 35 LED Line



REBA 35 LED
REBA 35 LED Line




REBA 35 D/I LED
REBA 35 D/I LED Line


REBA 35 LED
REBA 35 LED Line
Surface mounted / Suspended
Direct



REBA 35 D/I LED
REBA 35 D/I LED Line
Suspended
Direct / Indirect

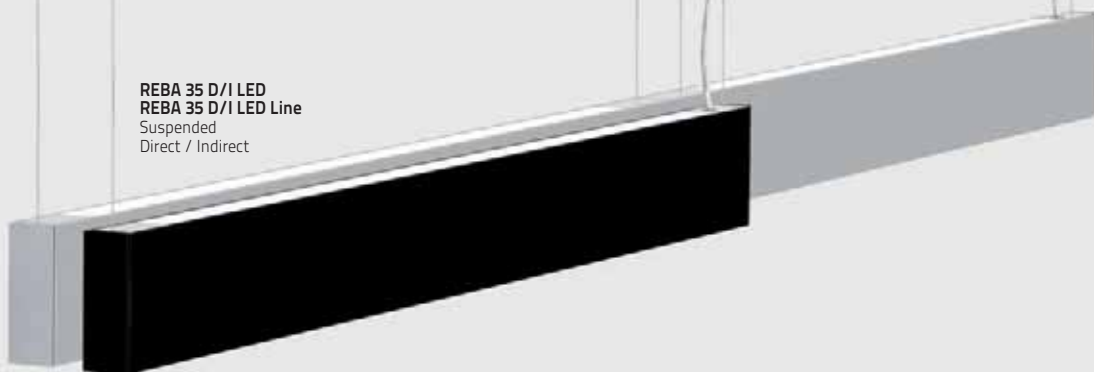

AVAILABLE
SIZES



REBA 35
(trim)
47,5x85 mm




REBA 35
**(direct/
indirect)**
35x100 mm

BLINE TECHNOLOGY



ONE
DIFFUSER
UP TO
30
METRES



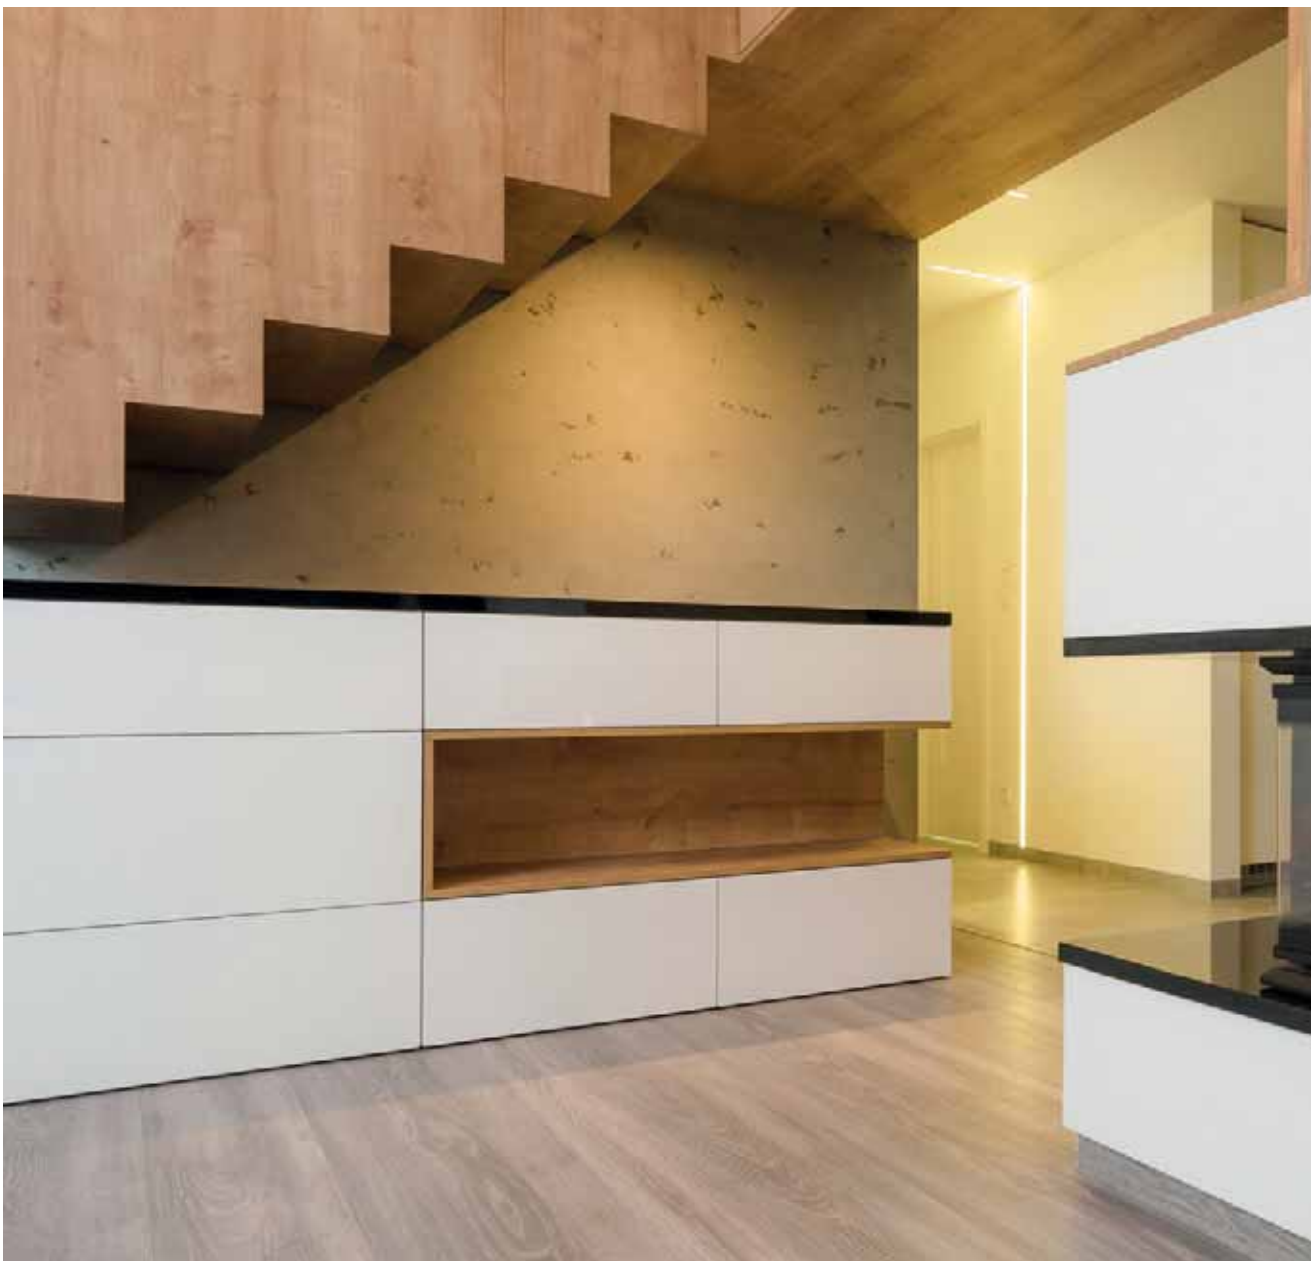



REBA RANGE

REBA LED
REBA LED Line
Surface mounted / Suspended
Direct

REBA /T LED
REBA /T LED Line
Recessed trimless

REBA /E LED
REBA /E LED Line
Recessed with trim

REBA X
Suspended
Direct

REBA RANGE

REBA /T LED
REBA /T LED Line

REBA /E LED
REBA /E LED Line

REBA LED
REBA LED Line

REBA LED
REBA LED Line

REBA X LED

REBA D/I LED
REBA D/I LED Line


REBA /P LED




REBA /P LED
Wall mounted

REBA D/I LED
REBA D/I LED Line
Suspended
Direct / Indirect

AVAILABLE
SIZES



**REBA
(trim)**
62x85 mm



**REBA
(trimless)**
50x70 mm



**REBA
(direct/
indirect)**
50x140 mm














REBA 65 RANGE

REBA 65 /T LED
REBA 65 /T LED Line
Recessed trimless

REBA 65 /E LED
REBA 65 /E LED Line
Recessed with trim

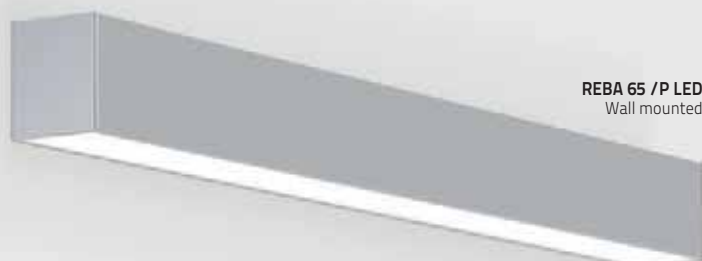

REBA 65 /P LED
Wall mounted

REBA 65 RANGE



REBA 65 /T LED
REBA 65 /T LED Line



REBA 65 /E LED
REBA 65 /E LED Line



REBA 65 LED
REBA 65 LED Line



REBA 65 LED
REBA 65 LED Line




REBA 65 D/I LED
REBA 65 D/I LED Line




REBA 65 /P LED


REBA 65 LED
REBA 65 LED Line
Surface mounted / Suspended
Direct

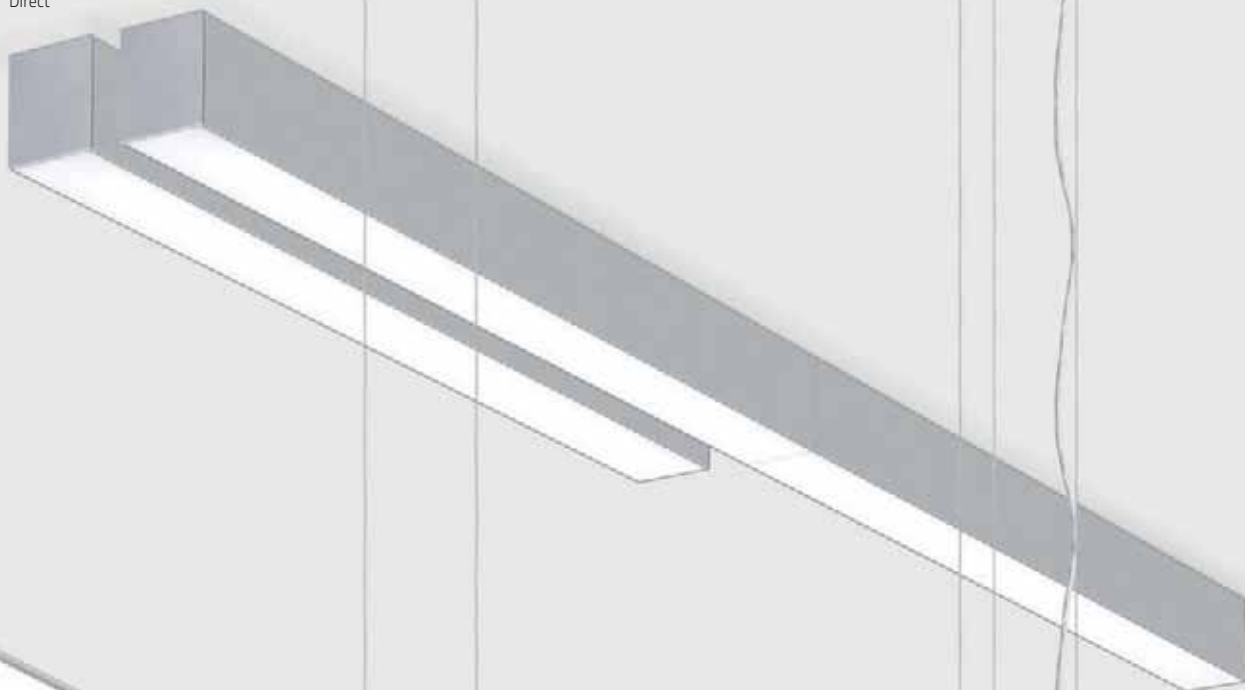


REBA 65 D/I LED
REBA 65 D/I LED Line
Suspended
Direct / Indirect

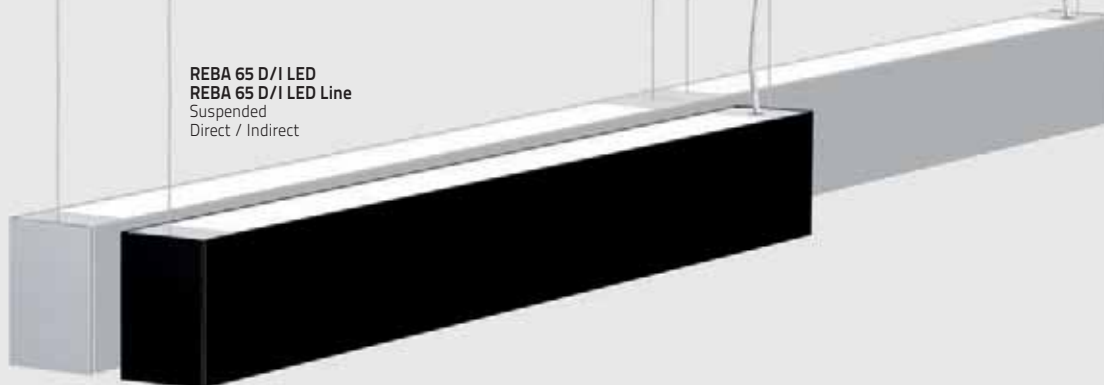

AVAILABLE
SIZES



**REBA 65
(trim)**
77x80 mm



**REBA 65
(trimless)**
65x80 mm



**REBA 65
(direct/
indirect)**
65x100 mm



Photos by Ivo Tavares - www.ivotavares.net








TCH RANGE

TCH /T LED
TCH /T LED Line
Recessed trimless

TCH LED
TCH LED Line
Surface mounted / Suspended
Direct

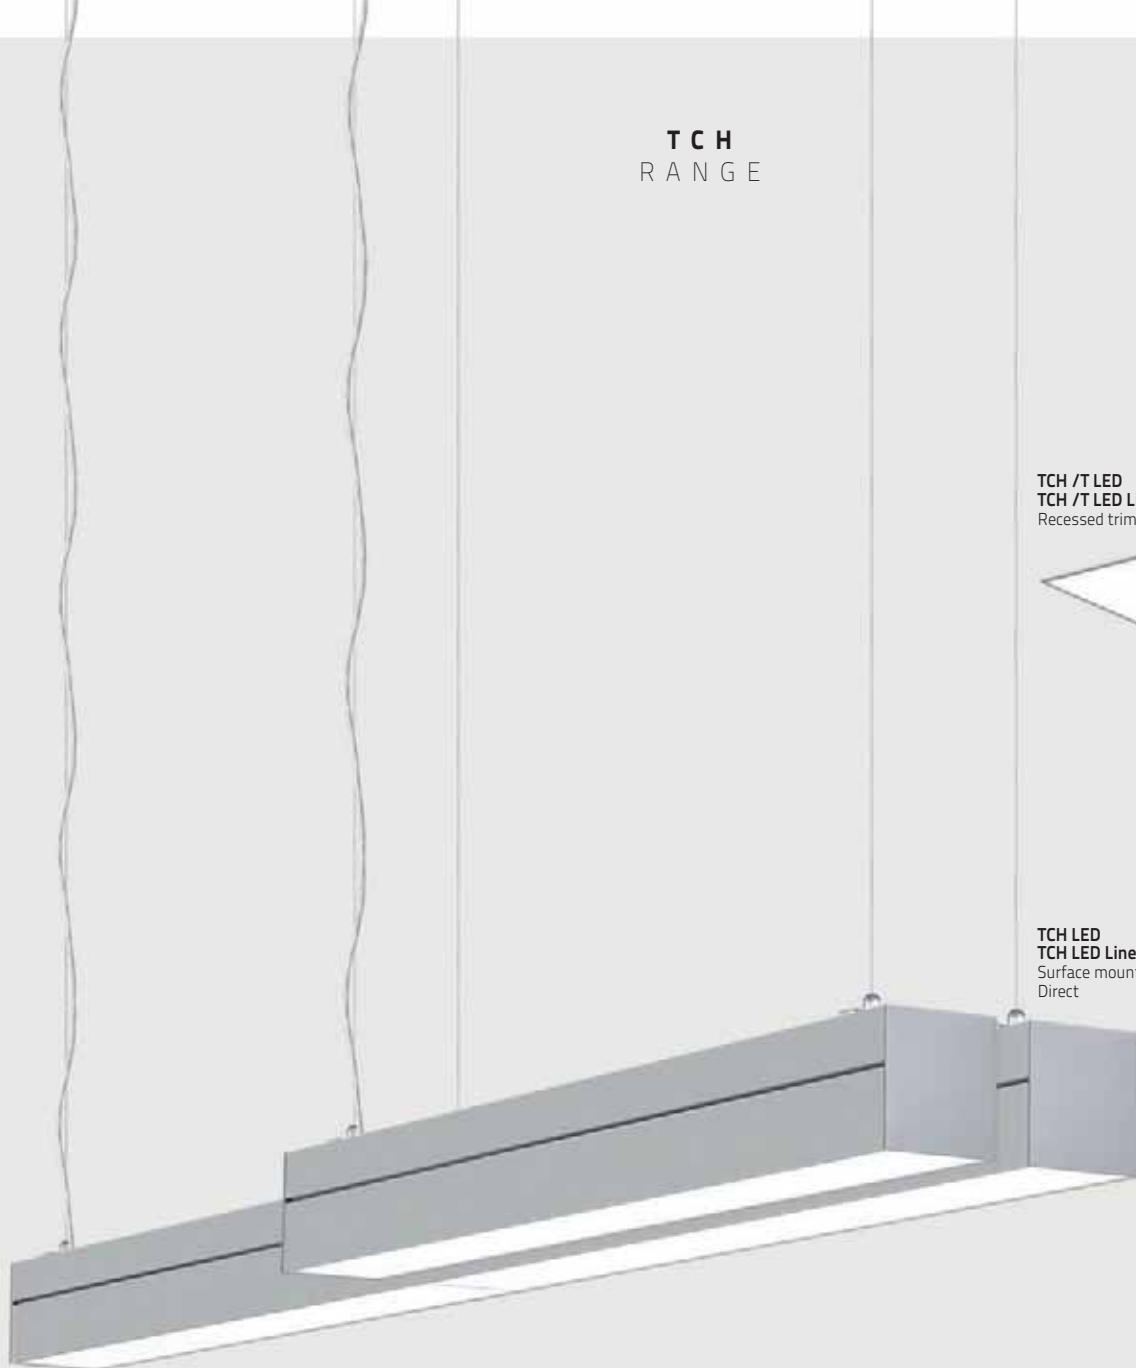

TCH RANGE



TCH /T LED
TCH /T LED Line



TCH /E LED
TCH /E LED Line



TCH LED
TCH LED Line




TCH LED
TCH LED Line



TCH D/I LED
TCH D/I LED Line


TCH /E LED
TCH /E LED Line
Recessed with trim

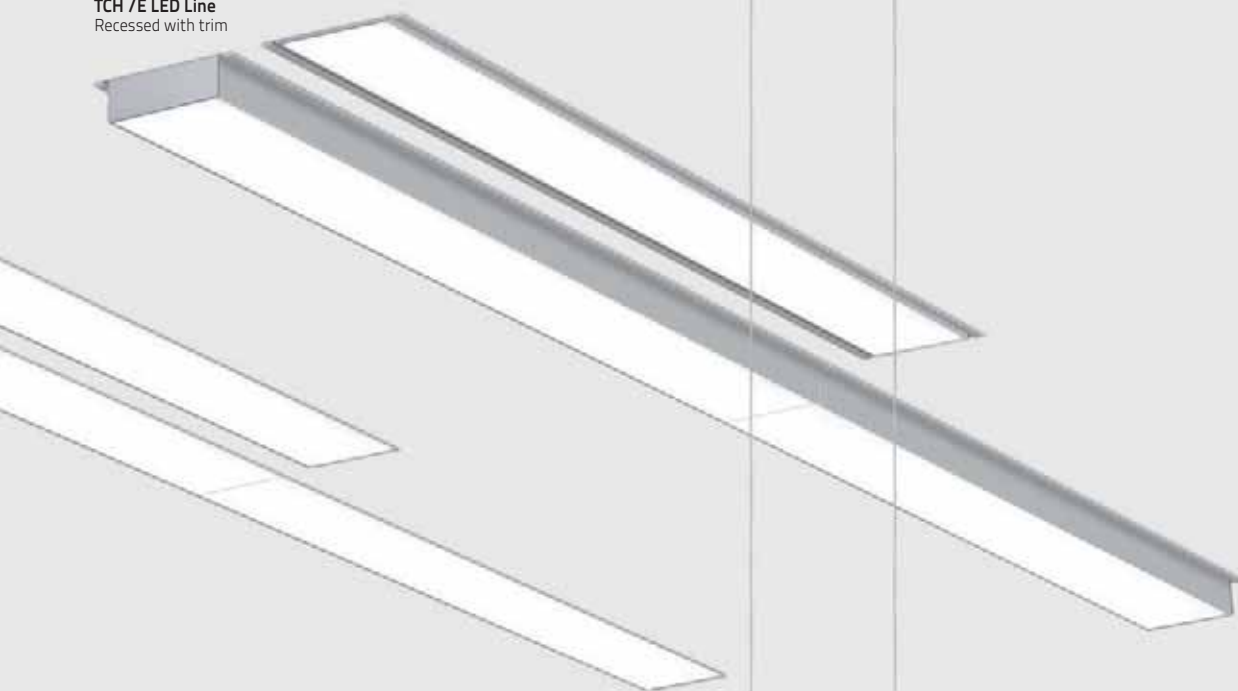


TCH D/I LED
TCH D/I LED Line
Suspended
Direct / Indirect



AVAILABLE
SIZES



**TCH
(trim)**
112x98 mm



**TCH
(trimless)**
90x98 mm





INDELAGUE GROUP

HEADQUARTERS

INDÚSTRIA ELÉTRICA DE ÁGUEDA S.A.

Rua da Mina 465 | Covão

Zona industrial EN1 Norte

Apartado 106 / 3754-909

3750-792 Trofa

ÁGUEDA | PORTUGAL

GPS. 40° 36' 00.54" N | 8° 27' 11.76" W

T. +351 234 612 310 | F. +351 234 624 058

indelague@indelague.pt

WWW.INDELAGUE.COM

UNITED KINGDOM

ROXO LIGHTING LIMITED

roxo.london@roxolighting.com

WWW.ROXOLIGHTING.COM

SPAIN

INDELAGUE ESPAÑA, S.L.

Avenida del Ejército, n° 8 - 1° C

C.P. 15006 | A CORUÑA | ESPAÑA

comercial@indelague.com

WWW.INDELAGUE.COM

All data contained in this brochure does not constitute any commitment to INDELAGUE - Indústria Eléctrica de Águeda, S.A. . The company itself, reserves the right to change or modify any information stated without prior notice. The reproduction of this brochure or any part of it is prohibited. Electric/Optical data are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/- 150 K. Unless stated otherwise, the technical data represent rated values for an ambient temperature of 25°C.