

# Rofy Concept S Spa Concept O



INDELAGUE GROUP

**INDELAGUE** ROXO lighting

Loft & Lys Aps  
Værkstedsgården 9  
2620 Albertslund  
6080 2973  
[www.loftlys.dk](http://www.loftlys.dk)  
[info@loftlys.dk](mailto:info@loftlys.dk)

# OVERVIEW

	CONCEPT RANGE				
					
Type of Application					
Light Distribution				 10% 90%	
Dimensions	1/8 (45°) * 1/4 (90°) * 1/2 (180°) * Straight Line *	Ø 650 mm Ø 950 mm Ø 1250 mm Ø 1550 mm Ø 1950 mm	Ø 676 mm Ø 976 mm Ø 1276 mm	Ø 650 mm Ø 950 mm Ø 1250 mm Ø 1550 mm Ø 1950 mm	
Optical System	DOZ 				
Colour Temperature	3000K 4000K				
Finishes					
Ceiling Roses		--			
Emergency Unit	--				
Low Power Version	--				
Safety Cable	--				



















































\* For dimension details, please check our website or current catalogue.

\*\* TunableWhite is not available for Ø 400mm versions.

\*\*\* Emergency unit is not available for Ø 400mm versions.

ROFY RANGE

SPA RANGE

								
ROFY /T LED	ROFY /E LED	ROFY LED	ROFY D/I LED	ROFY Z LED	ROFY Z D/I LED	SPA /E LED	SPA LED	SPA D/I LED
								
		 30%  70%			 30%  70%			 20%  80%
Ø 400 mm Ø 600 mm Ø 900 mm Ø 1150 mm			Ø 600 mm Ø 900 mm Ø 1150 mm			590x590 mm 875x315 mm 1150x315 mm 1425x315 mm		
gCONTROL  gCONTROL+  DOZ 						gCONTROL+  DOZ 		DOZ  DAM 
TunableWhite** 3000K 4000K						3000K 4000K		
<ul style="list-style-type: none"> <li> White</li> <li> Gray</li> <li> Black</li> <li> Blue</li> <li> Green</li> <li> Yellow</li> <li> Red</li> <li> Jungle</li> </ul>		<ul style="list-style-type: none"> <li> Golden eye</li> <li> Sahara</li> <li> Autumn</li> <li> Rusty chain</li> <li> Pure chocolate</li> <li> Mist</li> <li> Dark rock</li> <li> Carbon</li> </ul>						
--		1 or 3 Hours***				--		--
✓								
--	✓	--				✓	--	


CREATE SPACES  
THROUGH LIGHT






# OPTICAL SYSTEM



g CONTROL+™

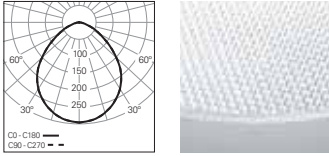


g CONTROL™

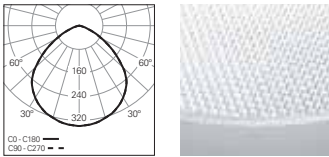

DOZ

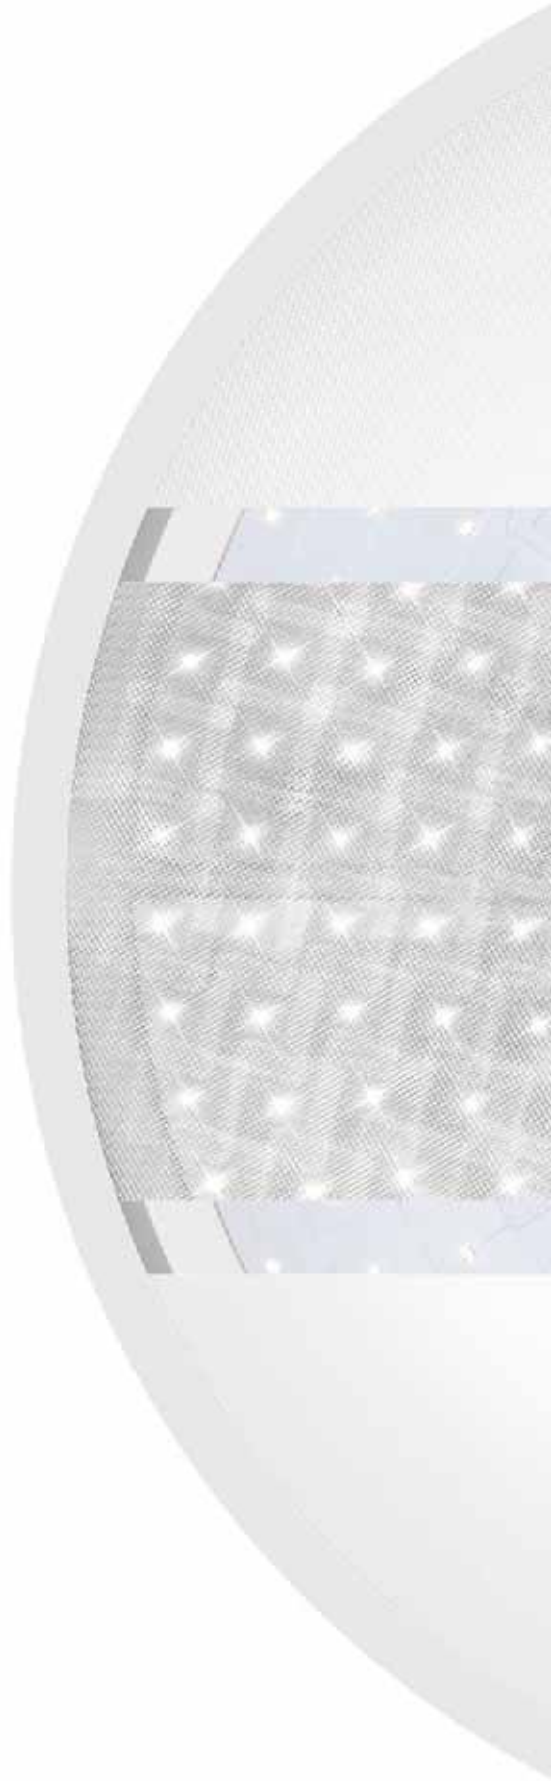

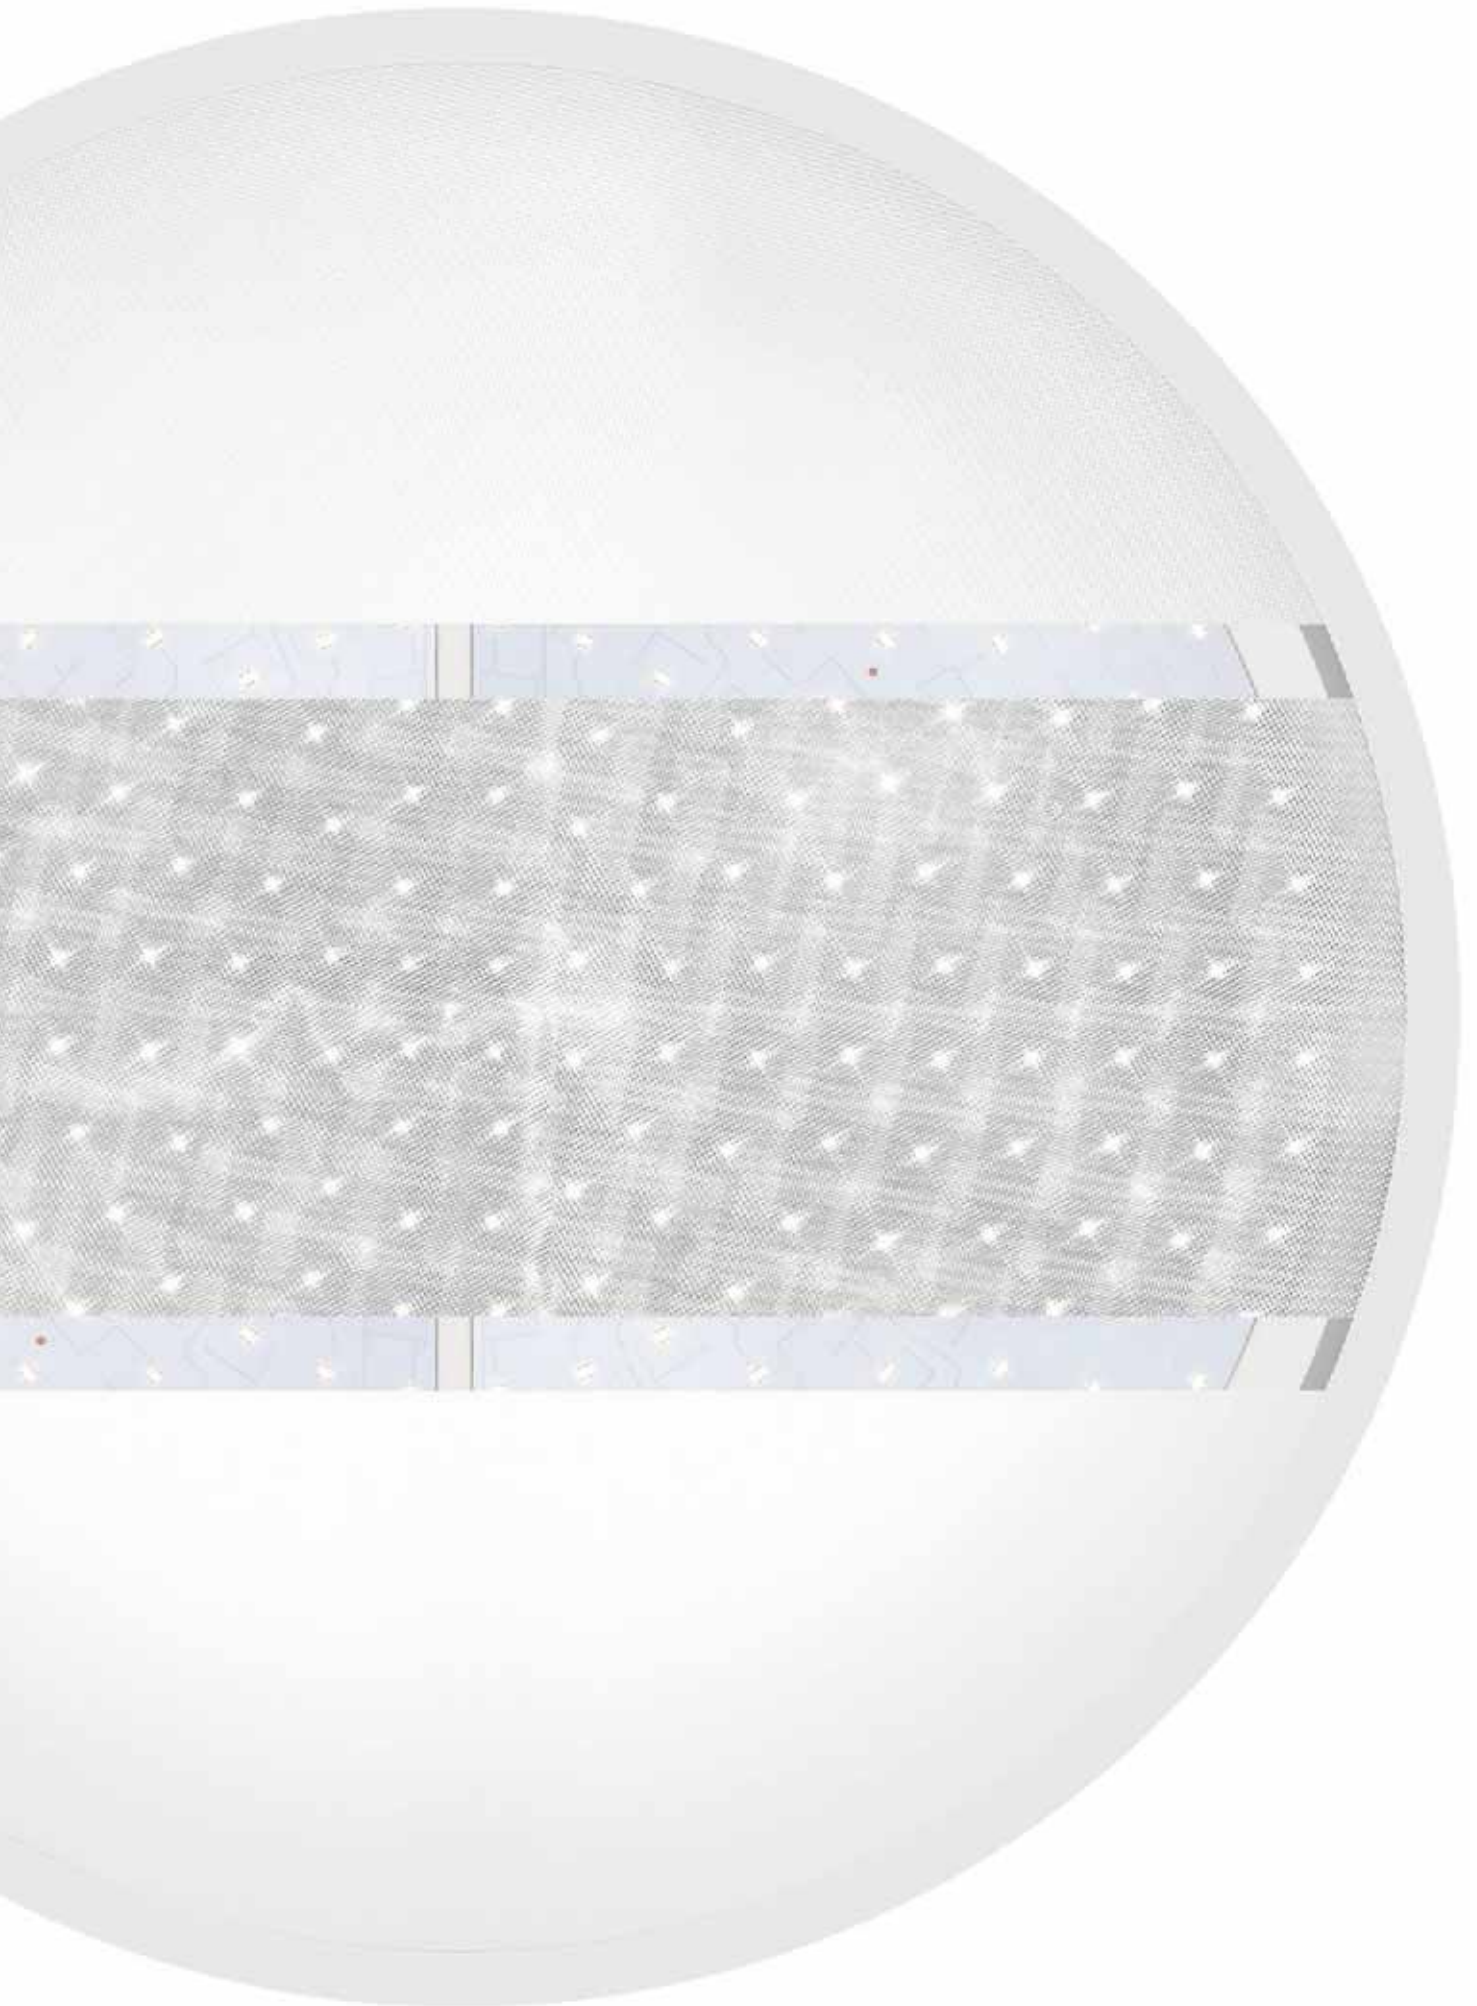




FINISHES

WHITE



GRAY



BLACK



BLUE



GREEN



YELLOW



RED



JUNGLE







PURE CHOCOLATE



SAHARA



MIST



GOLDEN EYE



DARK ROCK



AUTUMN



CARBON










RUSTY CHAIN




CONCEPT S  
RANGE










EXAMPLE OF  
POSSIBLE LIGHT  
CONCEPTS



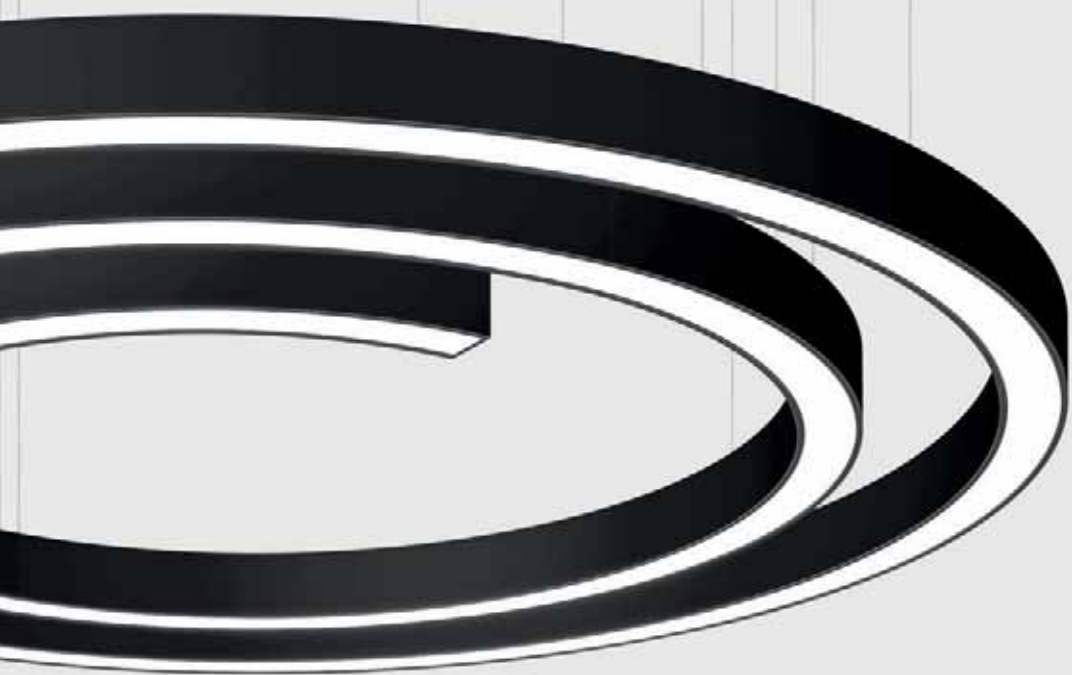

45° CIRCLE    90° CIRCLE  
180° CIRCLE    STRAIGHT LINE







CONCEPT O  
RANGE



CONCEPT O  
Suspended  
Direct

CONCEPT O RANGE



CONCEPT O /T



CONCEPT O /E



CONCEPT O



CONCEPT O



CONCEPT O D/I




CONCEPT O



CONCEPT O D/I

**CONCEPT O /E**  
Recessed with trim

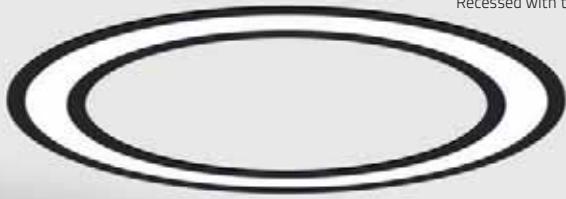

**CONCEPT O /T**  
Recessed trimless



**CONCEPT O**  
Surface mounted



**CONCEPT O D/I**  
Suspended  
Direct / Indirect



AVAILABLE  
SIZES



Ø 650 mm



Ø 950 mm



Ø 1250 mm



Ø 1550 mm





Ø 1950 mm

Please note: CONCEPT O /E is only available for Ø 676 / 976 and 1276 mm versions.







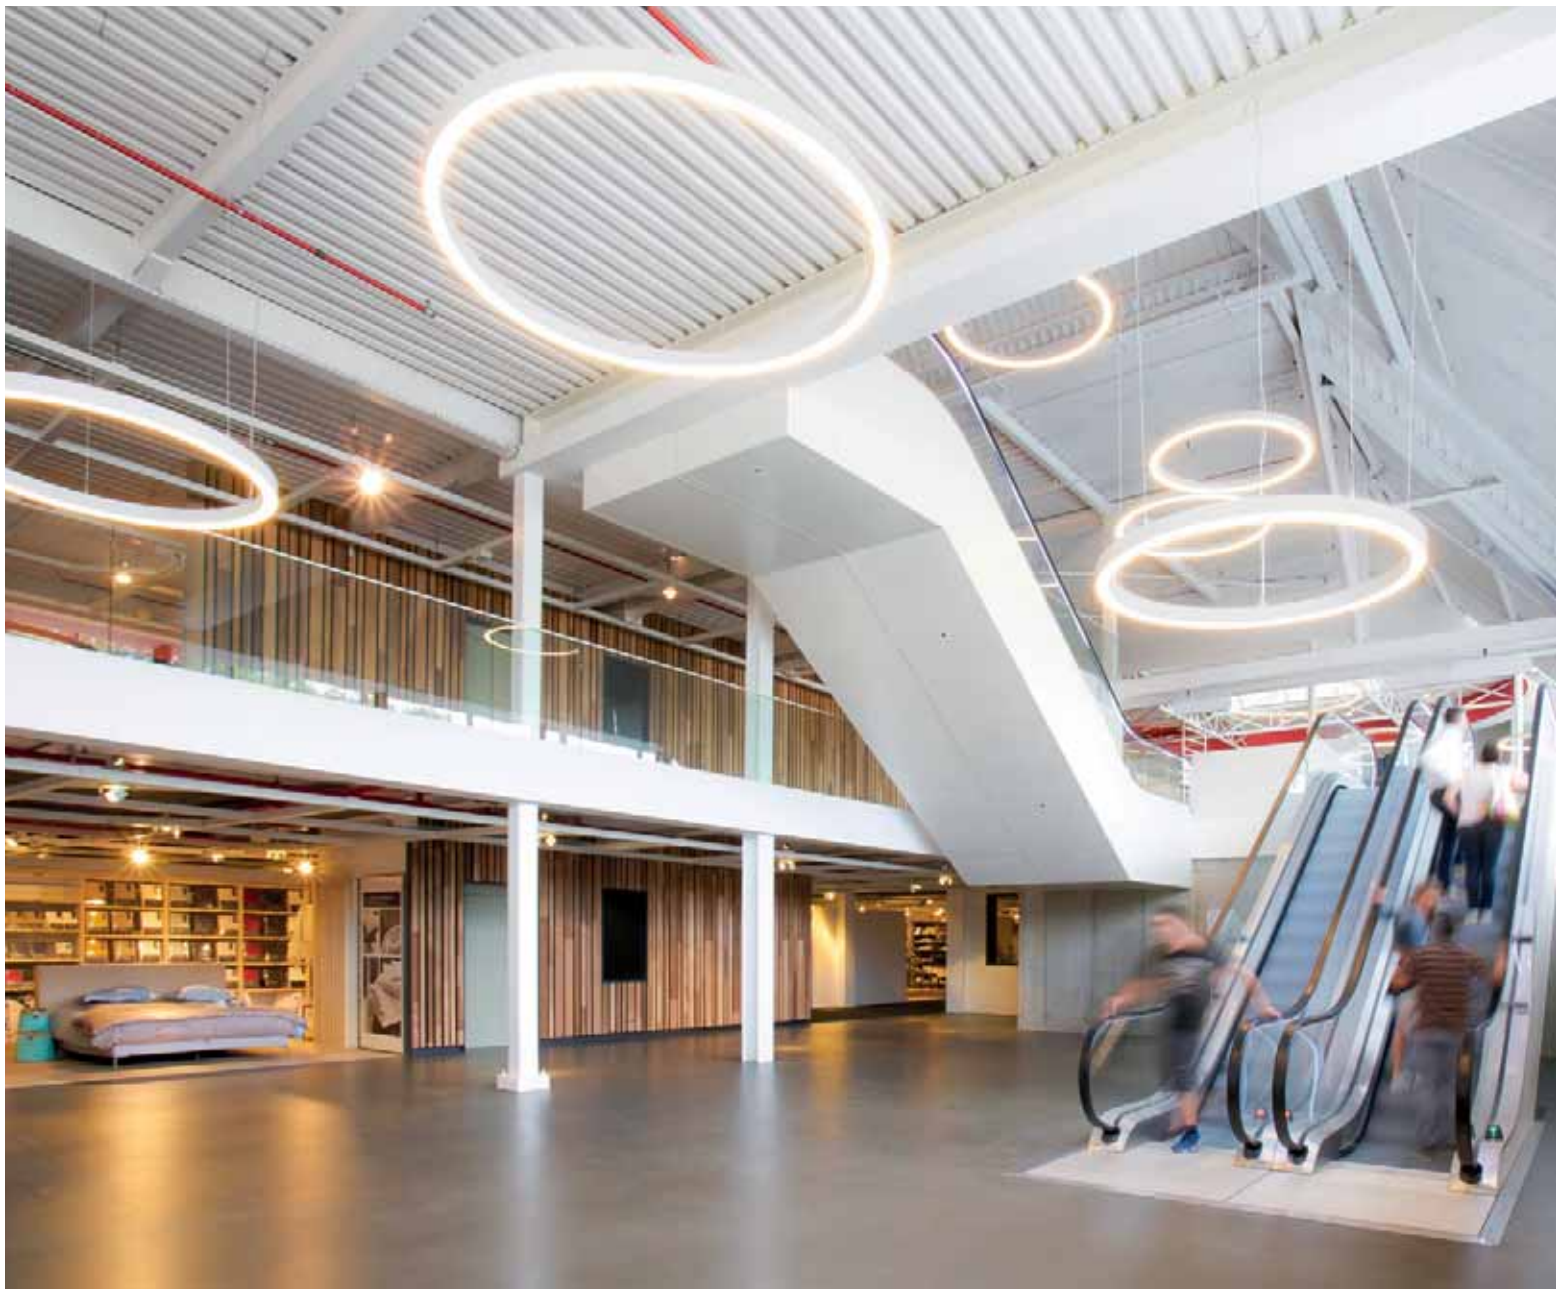









**ROFY**  
RANGE

**ROFY LED**  
Surface mounted

**ROFY /T LED**  
Recessed trimless

**ROFY /E LED**  
Recessed with trim

**ROFY LED**  
Suspended  
Direct



ROFY RANGE







**ROFY Z LED**  
Surface aura  
Direct



**ROFY Z D/I LED**  
Surface aura  
Direct / Indirect



**ROFY D/I LED**  
Suspended  
Direct / Indirect

AVAILABLE  
SIZES



Ø 400 mm



Ø 600 mm





Ø 900 mm



Ø 1150 mm

Please note: ROFY D/I LED / ROFY Z LED and ROFY Z D/I LED, only available for Ø 600 / 900 and 1150 mm versions.

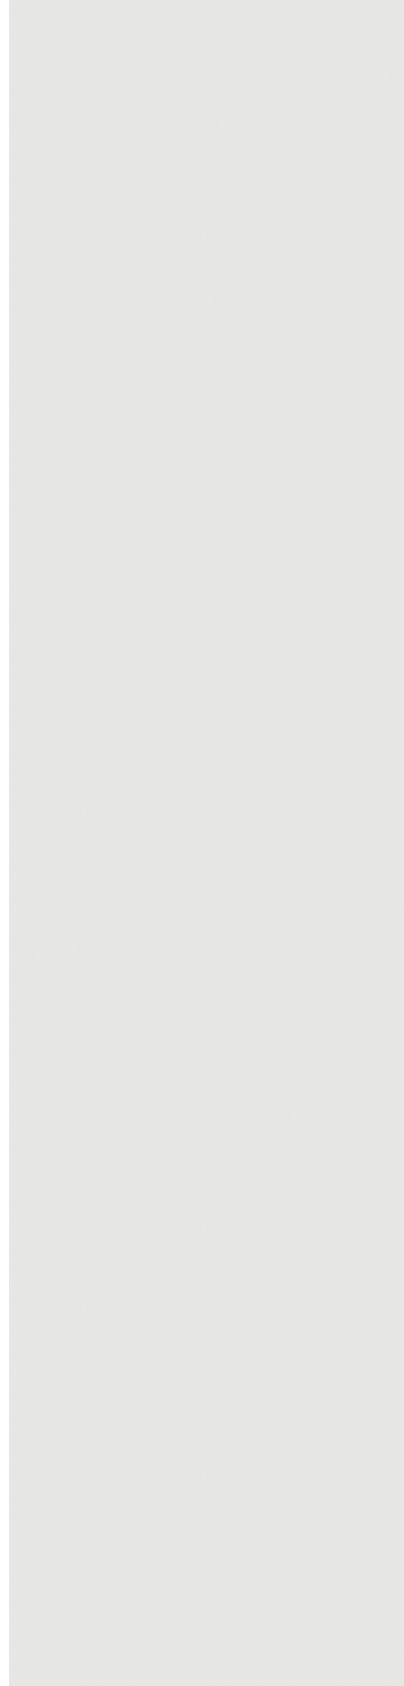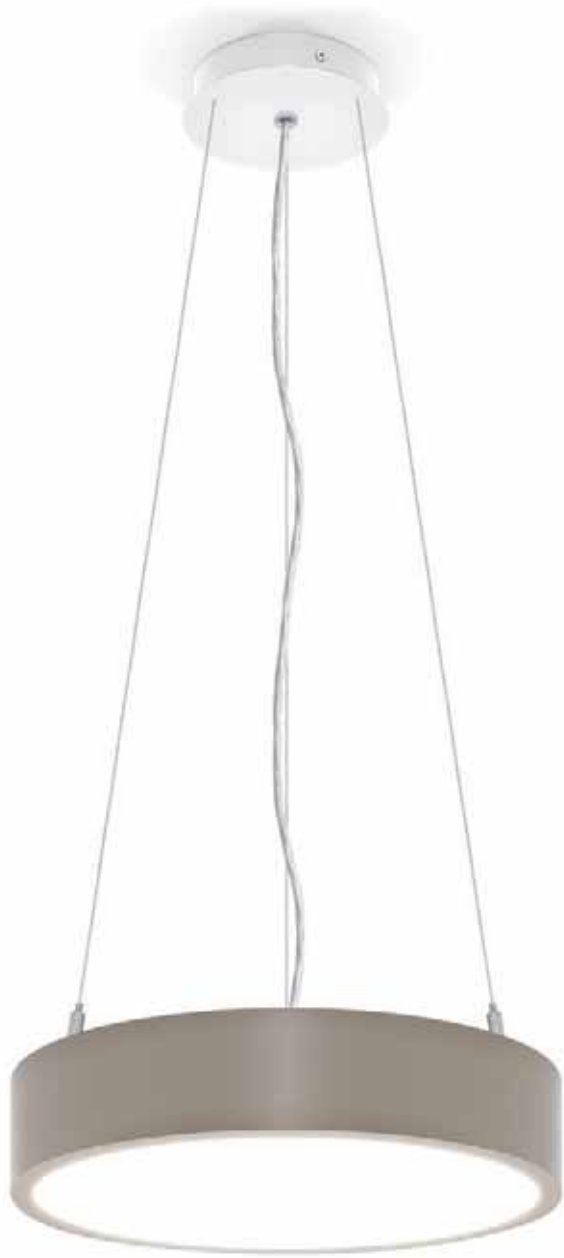















**S P A**  
R A N G E



**SPA LED**  
Suspended  
Direct


**SPA /E LED**  
Recessed with trim

---

S P A R A N G E

---



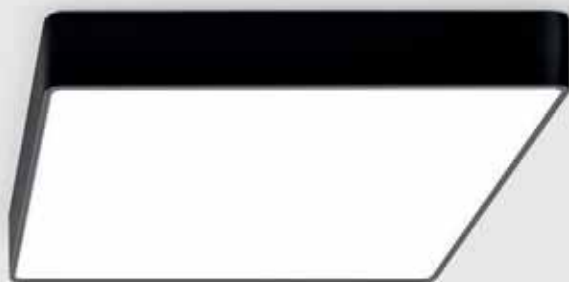

**SPA LED**  
Surface mounted



**SPA D/I LED**  
Suspended  
Direct / Indirect

---

AVAILABLE  
SIZES

---



590x590 mm



875x315 mm



1150x315 mm



1425x315 mm

---












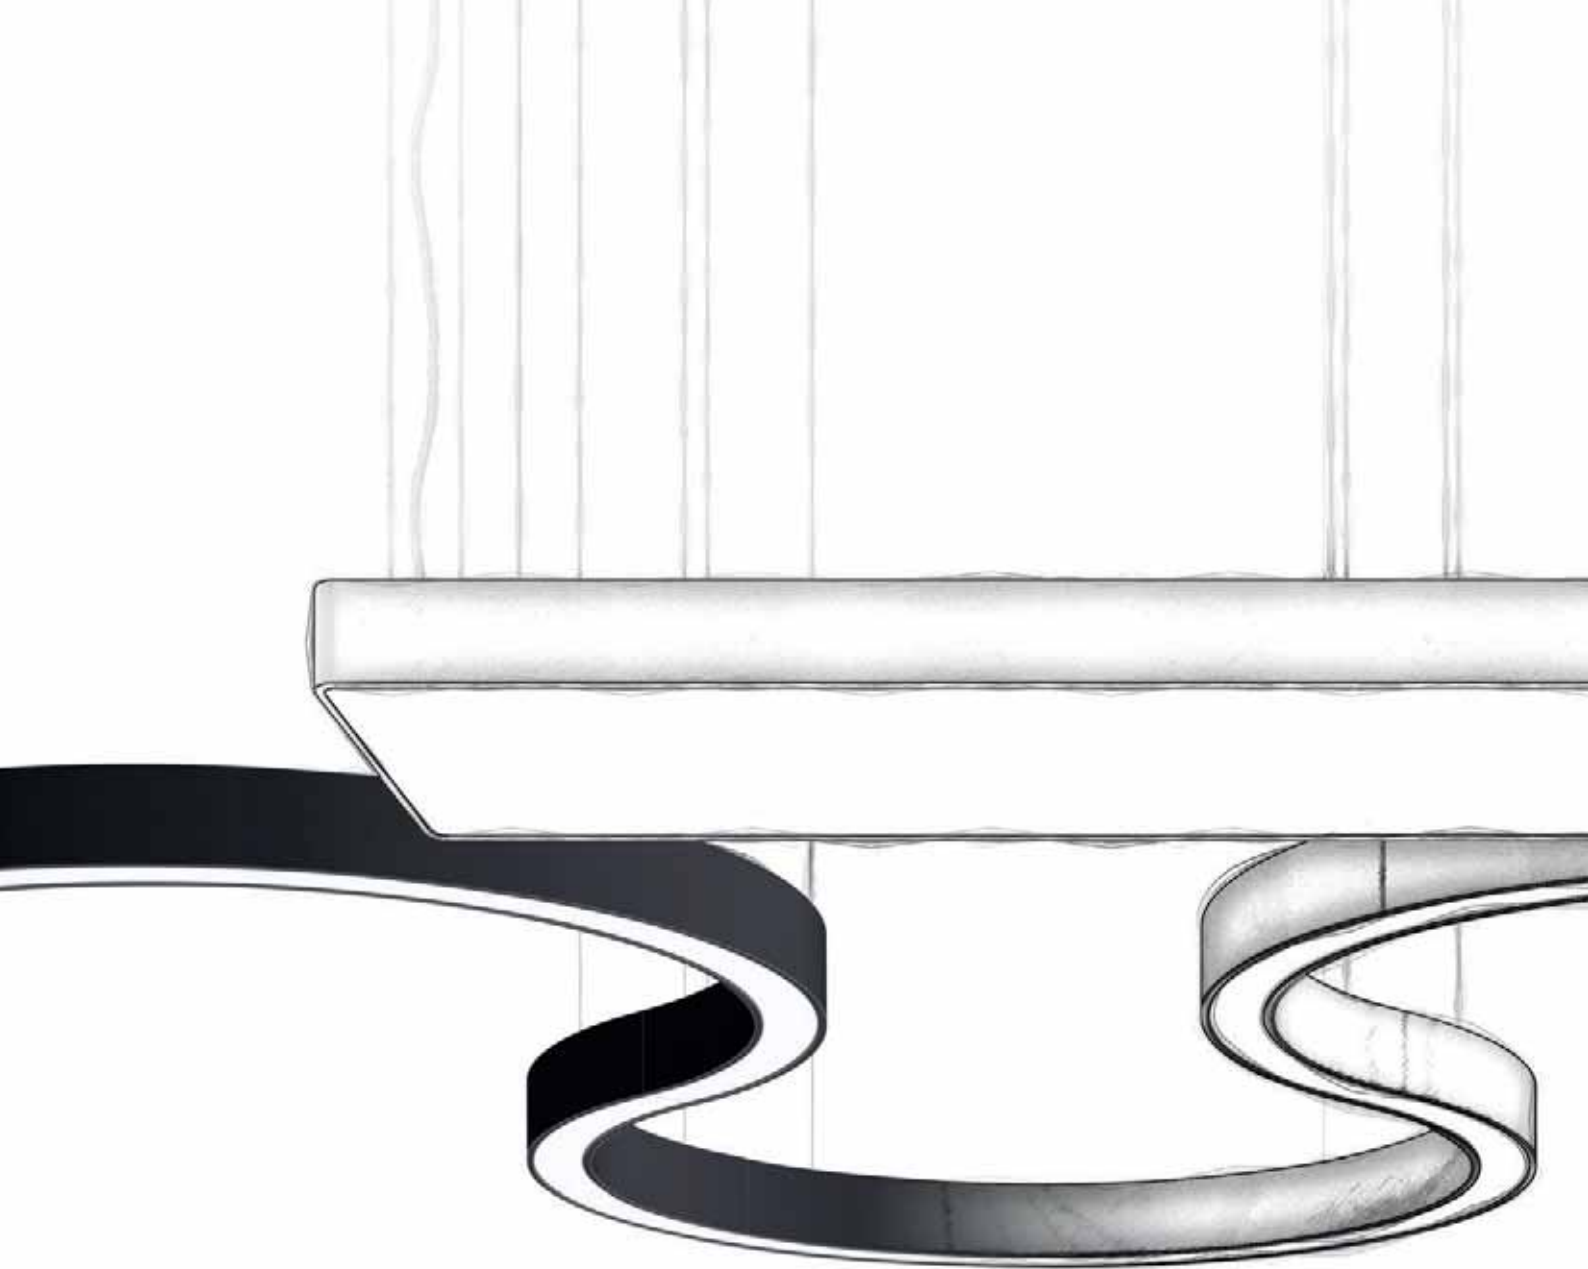

## INDELAGUE GROUP

### HEADQUARTERS

INDÚSTRIA ELÉTRICA DE ÁGUEDA S.A.  
Rua da Mina 465 | Covão  
Zona industrial EN1 Norte  
Apartado 106 / 3754-909  
3750-792 Trofa  
ÁGUEDA | PORTUGAL  
GPS. 40° 36' 00.54" N | 8° 27' 11.76" W  
T. +351 234 612 310 | F. +351 234 624 058  
indelague@indelague.pt  
WWW.INDELAGUE.COM

### UNITED KINGDOM

ROXO LIGHTING LIMITED  
roxo.london@roxolighting.com  
WWW.ROXOLIGHTING.COM

### SPAIN

INDELAGUE ESPAÑA, S.L.  
Avenida del Ejército, nº 8 - 1º C  
C.P. 15006 | A CORUÑA | ESPAÑA  
comercial@indelague.com  
WWW.INDELAGUE.COM

All data contained in this brochure does not constitute any commitment to INDELAGUE - Indústria Eléctrica de Águeda, S.A. . The company itself, reserves the right to change or modify any information stated without prior notice. The reproduction of this brochure or any part of it is prohibited. Electric/Optical data are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/- 150 K. Unless stated otherwise, the technical data represent rated values for an ambient temperature of 25°C.

Co-financiado por:

