



	T A L E A R A N G E		TALEA Glare RANGE	
		1		
	TALEA	TALEA Line	TALEA Glare	TALEA Glare /C
Type of Aplication				
Light Distribution				
Dimensions*	Ø100x598 mm Ø100x878 mm Ø100x1158 mm Ø100x1438 mm Ø100x1718 mm Ø100x1998 mm Ø100x2278 mm Ø100x2558 mm Ø100x2838 mm	Ø100x590 mm Ø100x870 mm Ø100x1150 mm Ø100x1430 mm Ø100x1710 mm Ø100x1990 mm Ø100x2270 mm Ø100x2550 mm	Ø100x878 mm Ø100x1158 mm Ø100x1438 mm Ø100x1718 mm Ø100x1998 mm Ø100x2278 mm Ø100x2558 mm Ø100x2838 mm	Ø100x878 mm Ø100x1158 mm Ø100x1438 mm Ø100x1718 mm Ø100x1998 mm Ø100x2278 mm Ø100x2558 mm Ø100x2838 mm
Optical System	bline		bLINE UGR ≤19	
Colour Temperature	3000K 4000K			
Finishes	Profile: Anodised		White End Caps: Grey Black	
Ceiling Roses	99		1	
End Caps Without Screws	<u> </u>			
Emergency Unit**	1 or 3 Hours***		1 or 3 Hours	

Indicative dimensions. For dimension details, please check our website or current catalogue.

Emergency unit is not available for 598/878mm versions.

Emergency unit only available for HF version. Telecommand signal is not available.









OPTICAL SYSTEM


b L I N E


















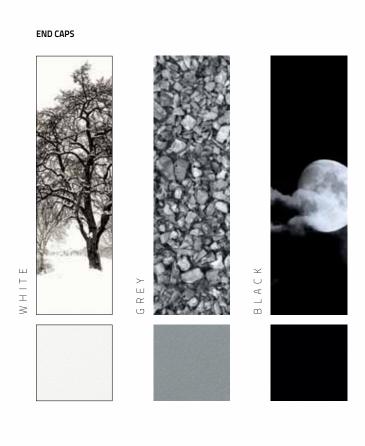

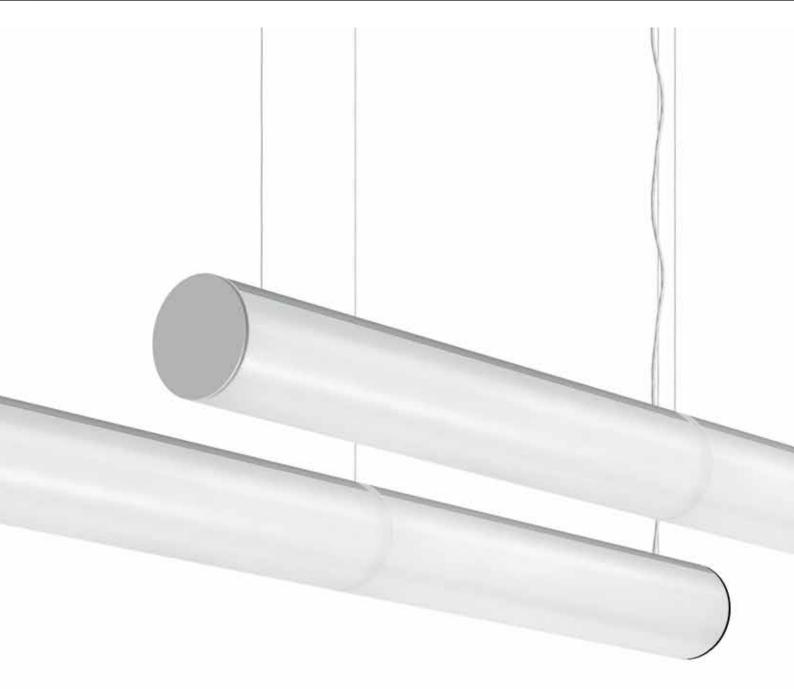







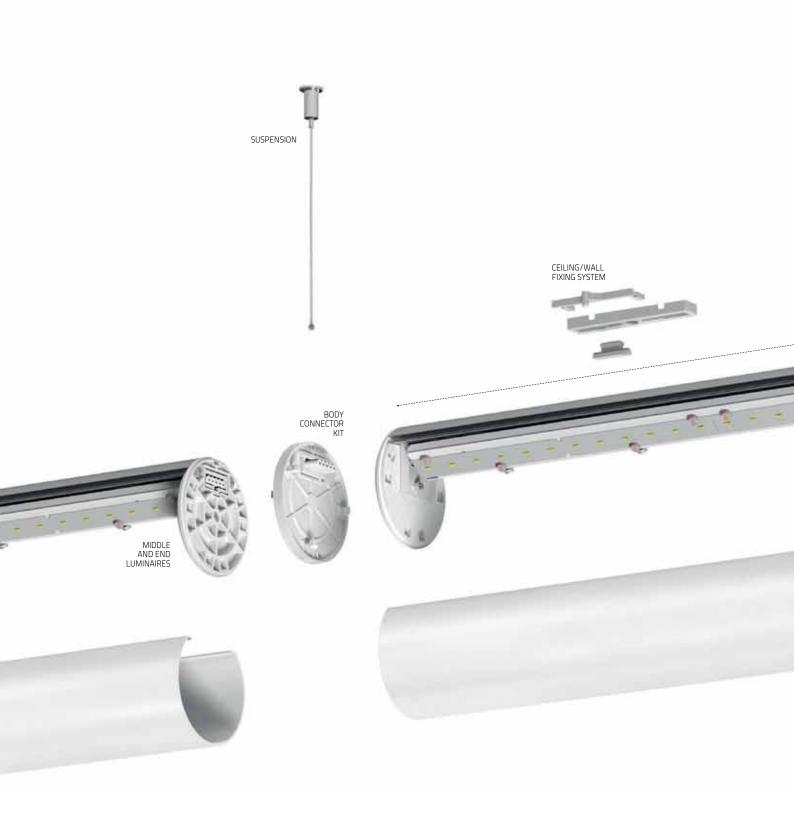




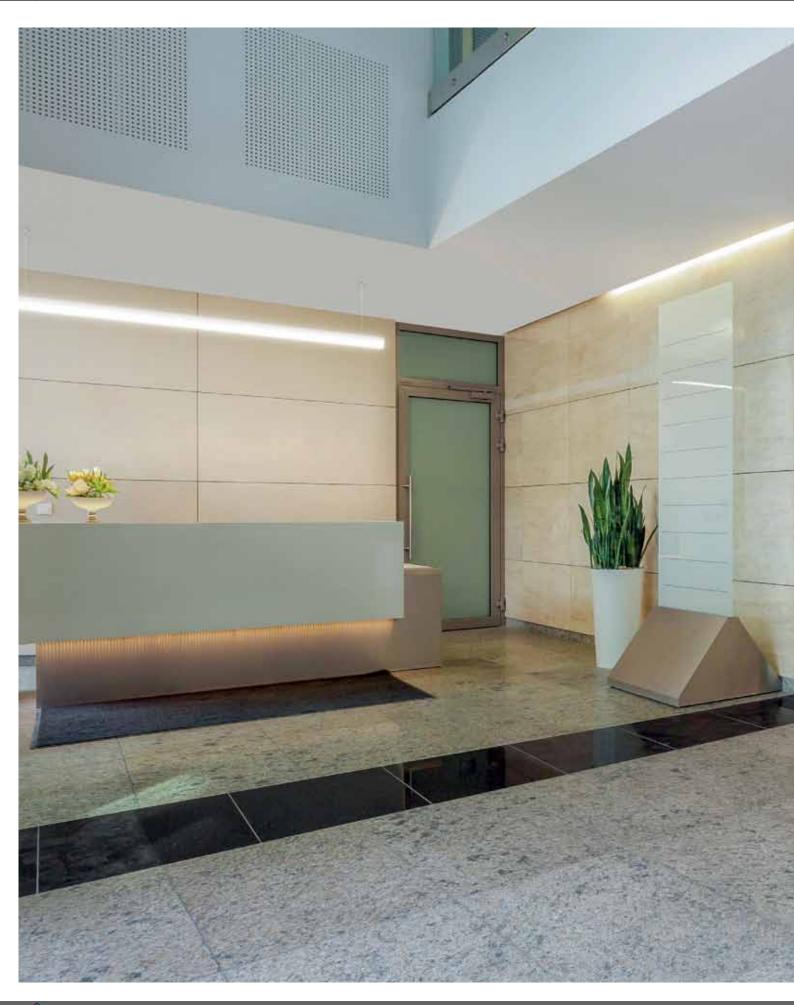

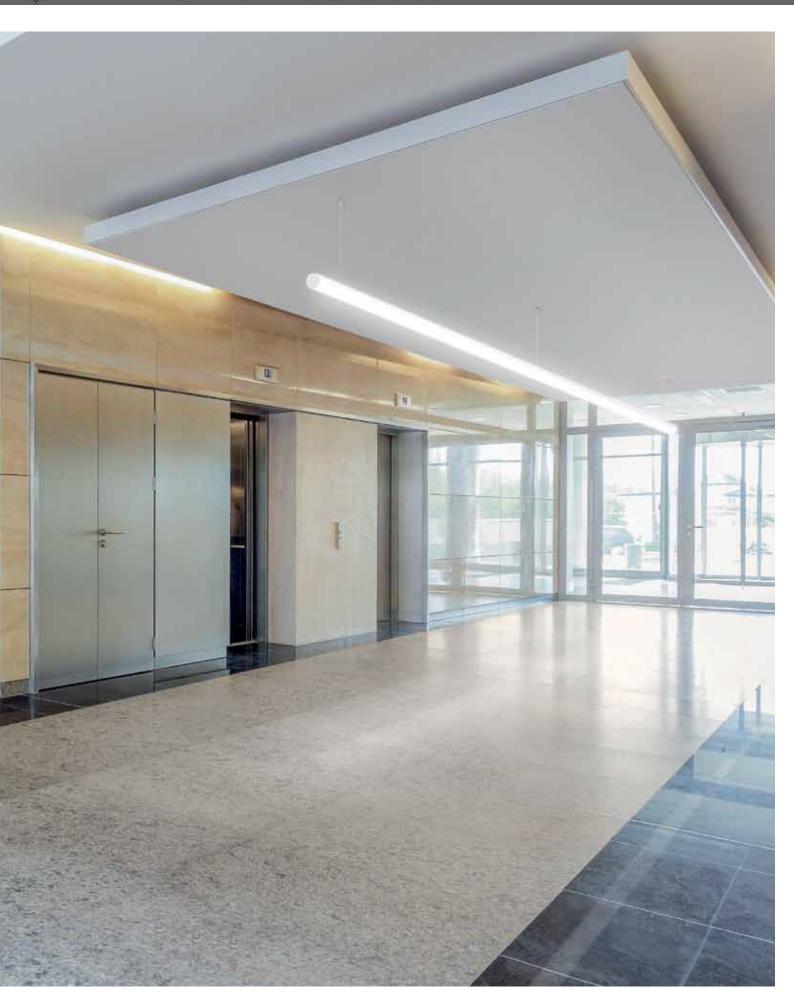

TALEA Glare RANGE

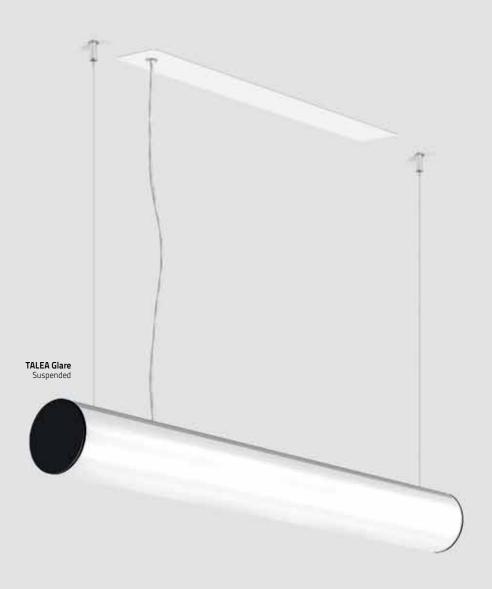

TALEA Glare RANGE







Loft & Lys Aps Værkstedsgården 9 ♦ DK-2620 Albertslund ♦ Denmark ♦ +45.6080 2973 ♦ www.loftlys.dk ♦ email: info@loftlys.dk

TALEA Glare FEATURES / COMPONENTS



